




PRODUCT SPECIFICATION


※ Features:

- ◇ All dimension are in millimeters(mm)
- ◇ Tolerance is +/-0.25mm unless otherwise notes
- ◇ Lead spacing is measures where the leads emerge from the package
- ◇ Specifications are subject to change without notice

※Package Dimensions

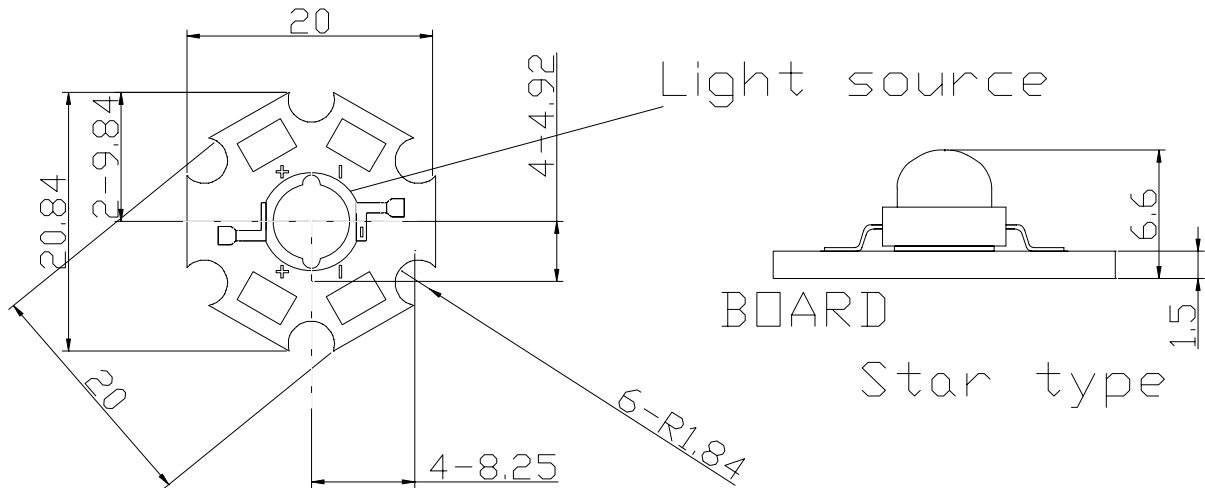

※Spatial Distribution

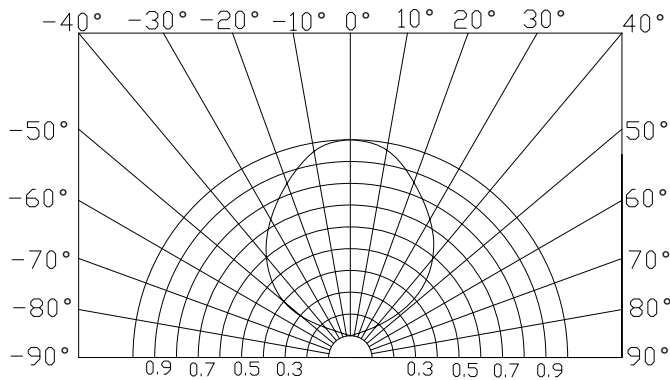

REVISION A	ECN/ECR INFORMATION	TITLE: 3W High Power LED White	SHEET No.
	ECN NO. DATE		1 of 2
P/N#: VL-H01PW60003180	CREATED By	CHECKED By	APPROVED BY



PRODUCT SPECIFICATION

※ Absolute Maximum Ratings at Ta=25°C:

Parameter	Symbol	Maximum	Unit
Power Dissipation	Pd	3	W
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IF(peak)	1000	mA
Continuous Forward Current	IF	750	mA
LED junction temperature	JT	120	°C
Reverse Voltage	VR	5	V
Operating temperature range	Topr	-35°C to + 50°C	
Storage Temperature Range	Tstg	-40°C to + 100°C	

※ Electrical/Optical Characteristics at Ta=25°C:

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Luminous flux	ϕ	IF=750mA	180	190	200	Lm
Viewing Angle	2 θ 1/2	IF=750mA	115	120	125	deg
Forward Voltage	V _F	IF=750mA	3	3.3	3.6	V
Reverse Current	IR	VR=5V			10	uA
Correspondingly	CCT	IF=750mA	6000	6250	6500	K

REVISION A	ECN/ECR INFORMATION	TITLE: 3W High Power LED White		SHEET No.
	ECN NO. DATE			2 of 2
P/N#: VL-H01PW60003180		CREATED By	CHECKED By	APPROVED BY