## RGB Color Indoor Quad Row RGB Flexible Light Strips

Part Number: 4NFLS-x24-24V-CL

## Features

Features 2835SMD non-weatherproof high powered LEDs

24 VDC operating voltage

CRI light available in red, green, and blue options.

LED Light Strip features adhesive backing & cuttable 24-LED segments for easy installation

180° optics improve visibility with wider area illumination

Applications include: Accent lighting, wall washing, theater lighting, stage lighting, sign backlighting, bias lighting, cabinet lighting, under-cabinet lighting, showcase lighting, trade show lighting, or for other indoor applications where space is limited.





(13) (13) (13) (13)

(13) (13) (13) (13)

(m) (m) (c) (c) (c)

 $\begin{array}{c} \left( 12 \right) & \left( 12 \right) & \left( 12 \right) \\ \hline \\ \left( 12 \right) & \left( 12 \right) & \left( 12 \right) \\ \hline \\ \left( 12 \right) & \left( 12 \right) & \left( 12 \right) \\ \hline \\ \left( 12 \right) & \left( 12 \right) & \left( 12 \right) \\ \hline \end{array}$ 

(c) (c) (c) (c)

(a) (a) (a)

(m) (m) ((3) ((3) ((3) ((3)

(m) (m) (c) (c) (c)

(a) (a) (a)

Accessories



Remote Dimmers & Switches



Power Supplies



Aluminum Profiles

General Product Specifications								
Beam Angle	180 Degree	Туре	Quad-Row Flexible Light Strip					
LED Type	2835 SMD	Color	Red, Green, and Blue					
Operating Voltage Range	24 VDC	Life Span	≥60,000 Hrs					
LEDs Per Segment	24	Strip Width	28mm					
Water Resistance	Non-Weatherproof	Strip Finish	White					
Polarity Sensitive	Yes							




REV 09.26.2016



Product	t Specifications				
E	Emitting Color	Wavelength	Intensity Per Foot	Current Draw @ 24 VDC	
E	Blue	465 nm	355 lm/ft	115 mA	
	Green	524 nm	1085 lm/ft	120 mA	
F	Red	632 nm	579 lm/ft	120 mA	

## Dimensions

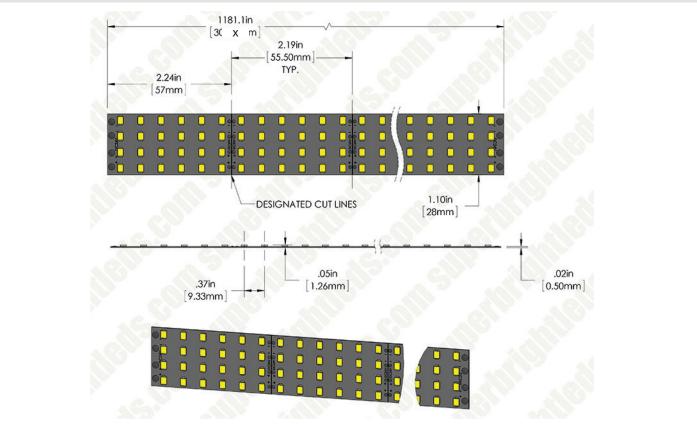

Maximum Flexibility Precaution

LED Lighting For Everything

