Instructional Sheet
Part Numbers:

AUX-27MB

Important: Read all instructions prior to installation.

2007-2015 Jeep Wrangler JK LED Light Brackets

Parts Included

2 - 2” LED Fog Light Mounts
2 - 2” LED Fog Light Filler Plates
4 - 4-40 x 5/8” T10 Torx Screws
4 - 16-14 AWG Perma-Seal Butt Connectors

Tools & Supplies Required

- 13mm & 18mm Socket/Wrench
- Phillips Screwdriver
- T10 Torx Screwdriver
- 2.5mm Allen Wrench
- Wire Stripper/Crimper
- Heat Gun

Important

Please read instructions before beginning installation. Check the kit hardware against the kit contents. Be sure you have all the needed parts and know where they go. This bracket kit is designed to fit 3” 12- or 18-watt auxilary lights.

Application

Only fits **2007-2015 Jeep Wrangler JK** models.

Installation Instructions

1. Using a Phillips screwdriver, remove filler panel from between bumper and grill.
2. Using an 18mm socket, remove the 8 nuts from the rear of your front bumper.
3. Unplug fog lights, and pull the push-pin wire ties from the bumper.
4. Using a Phillips screwdriver, remove the factory fog lights from the bumper.
5. Remove the 2 center Allen screws from the face of each light with a 2.5mm Allen wrench.
6. Attach mounting bracket supplied with the product to lights using the provided hardware and Allen wrench.
7. Place each light inside housing and tighten nut and lock washer with 13mm wrench.
8. Place assembled lights into bumper using factory hardware and tighten with a Phillips screwdriver.
9. Reinstall bumper using factory hardware and tighten with a 18mm socket.
10. Wire LED light pigtails to factory harness with supplied butt connectors and seal with a heat gun. Plug pigtails into lights.
11. Place flat filler plate over each light and tighten the supplied T10 Torx screws with a T10 screwdriver.

4400 Earth City Expy, St. Louis MO 63045 **866-590-3533** **support@superbrightleds.com**

Important: Read all instructions prior to installation.

2007-2015 Jeep Wrangler JK LED Light Brackets

Dimensions

NOTE: THE DIMENSIONS FOR THIS PRODUCT ARE FOR REFERENCE ONLY. SOME BRACKETS ARE ABLE TO SHIFT TO DESIRED POSITION WHEN INSTALLED. USE BRACKETS WITH FIXTURE TO MARK HOLES BEFORE DRILLING.

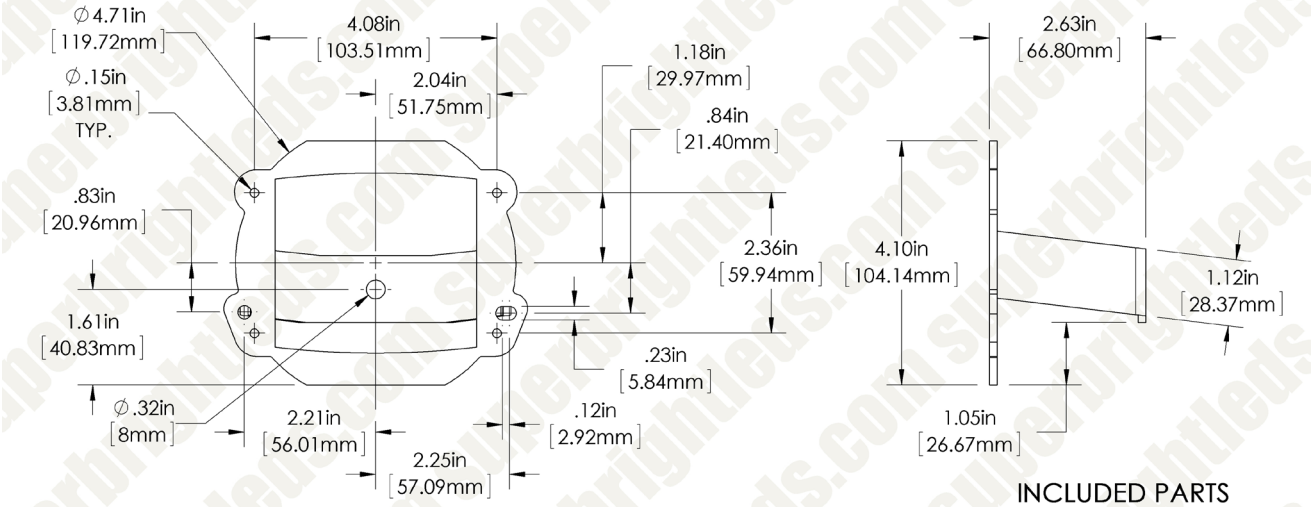

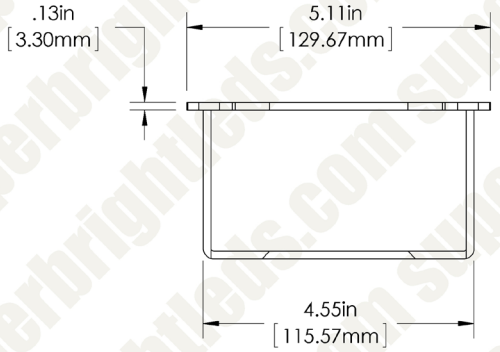
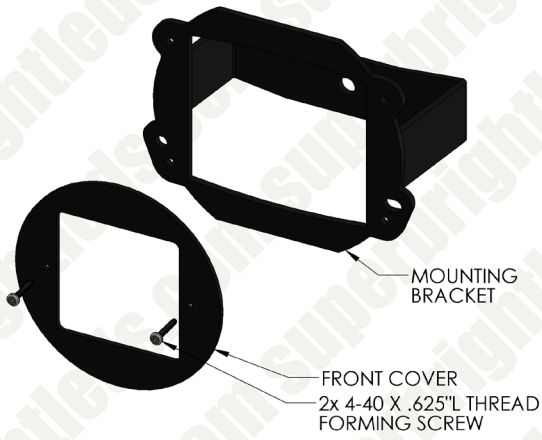
INCLUDED PARTS