

Important: Read all instructions prior to installation.

Slim LED Wall Pack





WPGL2-50K100-H

Safety and Notes

- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- Photocell sensor can be disabled by unplugging it and capping the connector that was attached to the sensor.

Wiring Diagram

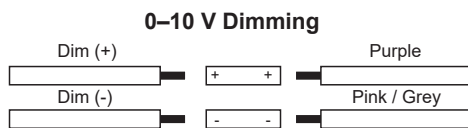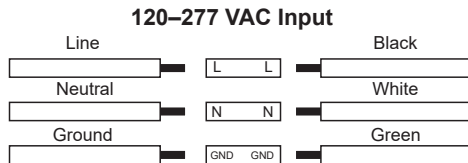


Specifications

Model	WPGL2-50Kx-H	WPGL2-SW3Bx-HPC
Operating Temperature	-40°–113° F (-40°–45° C)	
IP Rating	IP65	
Dimming	0–10 V	

Check product label for specific electrical specifications related to installation.
Improper installation will void warranty.

Opening Fixture

1. Remove front cover retaining screws and swing front housing open.
 2. Loosen reflector retaining screws and slide reflector down and out of the housing. The reflector has a hanging cable to allow it to hang in place during installation.
- Note: Be careful handling the reflector as the edges of the reflector as it can be sharp in places.

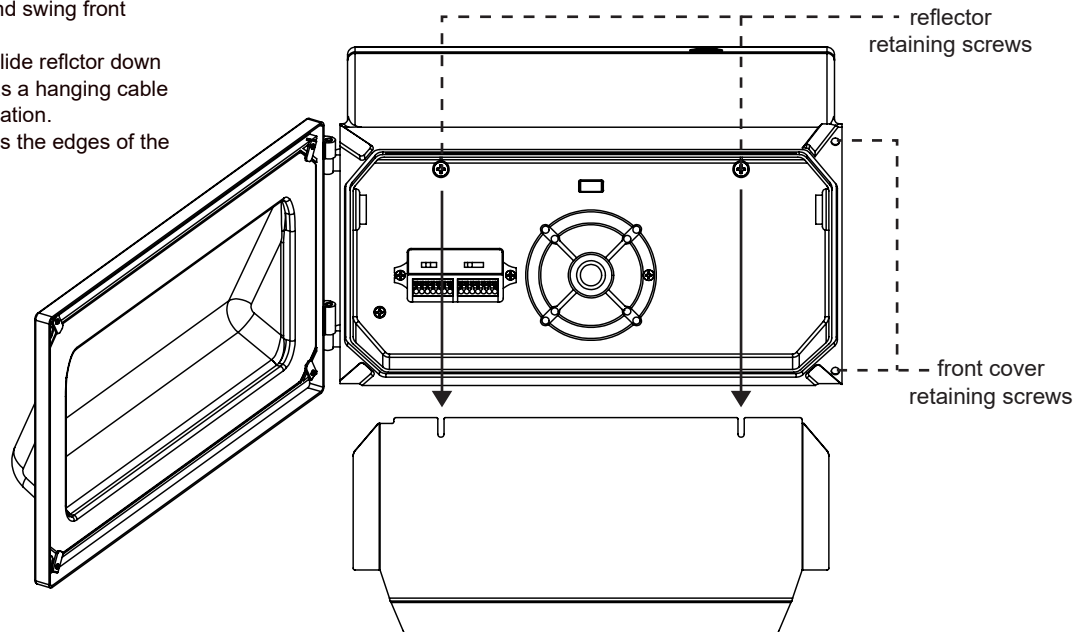

Rev Date: V1 11/30/2021

4400 Earth City Expy, St. Louis, MO 63045

• 866-590-3533



• superbrightleds.com

Important: Read all instructions prior to installation.

Slim LED Wall Pack


Installation (Junction box)

1. Remove supply power, open fixture, and remove reflector.
2. Drill holes in rear housing for mounting and remove pipe plug for junction box wiring.
3. On field-selectable CCT/wattage models, select desired CCT/wattage using internal switch.
4. Connect wiring.
5. Reinstall reflector and tighten two retaining screws.
6. Reattach front housing to rear.

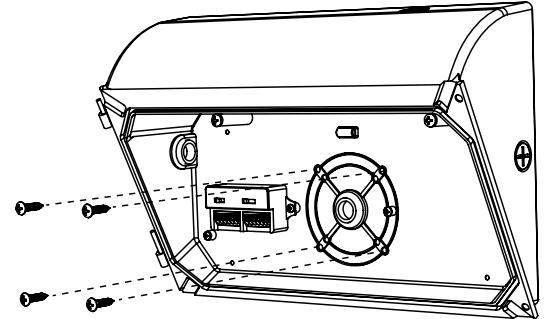


Installation (Conduit / Wall)

1. Remove supply power, open fixture, and remove reflector.
2. Drill holes in rear housing for mounting and remove one of the side pipe plugs.
3. Measure and create mounting holes on wall if needed.
4. On field-selectable CCT/wattage models, select desired CCT/wattage using internal switch.
5. With supply power off, connect wiring and conduit.
6. Reinstall reflector and tighten two retaining screws.
7. Reattach front housing to rear.

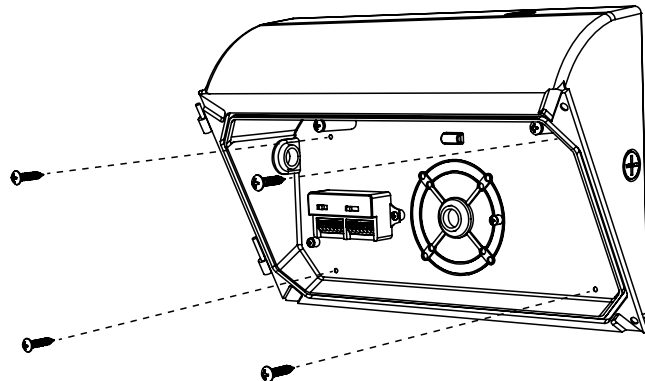

CCT / Wattage Adjustment

Field-selectable CCT / wattage can be set using the internal switch as shown. Make certain supply power is off when performing this procedure. WPGL-SW3Bx-HPC are the only part numbers with this adjustment available.

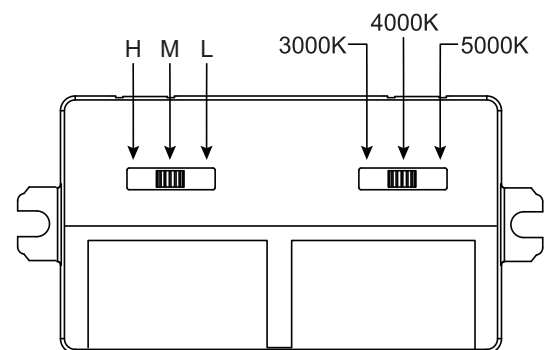

Model	WPGL2-SW3B35-HPC	WPGL2-SW3B50-HPC	WPGL2-SW3B75-HPC	WPGL2-SW3B100-HPC	WPGL2-SW3B120-HPC
Selectable Wattage (H / M / L)	35 W / 28 W / 21 W	50 W / 40 W / 30 W	75 W / 60 W / 45 W	100 W / 80 W / 60 W	120 W / 96 W / 72 W

