

Important: Read all instructions prior to installation.

Rechargeable LED Flood Light with Detachable Battery and Phone Charging USB Port

Included Parts

BWLD-10W

- 1 - LED Flood Light
- 1 - Rechargeable Battery
- 1 - AC/DC Power Adapter
- 1 - Car Charger Adapter

Optional Accessories

- 1 - Replacement Rechargeable Battery

Specifications

BWLD-10W	
Total Power Consumption	10 Watts
Operating Voltage Range	100~240 VAC / 12~24 VDC
Beam Angle	120 degree
Materials	Aluminum, plastic, glass
Battery Life	4~12hrs
Color Temperature	4000 K
CRI	80
Operating Temperature	-22~113°F (-30~45 °C)
IP Rating	IP65 (IP20 with battery)
LED Lifetime	5,000 Hours
Fixture Weight	1 lbs 14 oz (.85Kg)
Standards and Certifications	CE / RoHS
Warranty	2 Years

Switching Steps


- Turn on the lamp** - Press power switch
- Dimming** - Power switch acts as a dimmer switch after lamp on, press slightly to choose ideal brightness.
- Turn off** - Press power switch for 2 seconds

Intensity to Battery Life Gauge

Intensity	Battery Life
25% Light	13 Hours
50% Light	6 Hours
75% Light	4 Hours
100% Light	2.5 Hours
Flash Mode	N/A

Battery Capacity Indicator

- Charging:** Charger indicator LED turns red
- Fully Charged:** Charger indicator LED turns to green
- Working:** one indicator LED turns off with every 20% battery decrease
- *The USB output can recharge a mobile phone, tablet, PC, etc. Battery must be charged or plugged in.**

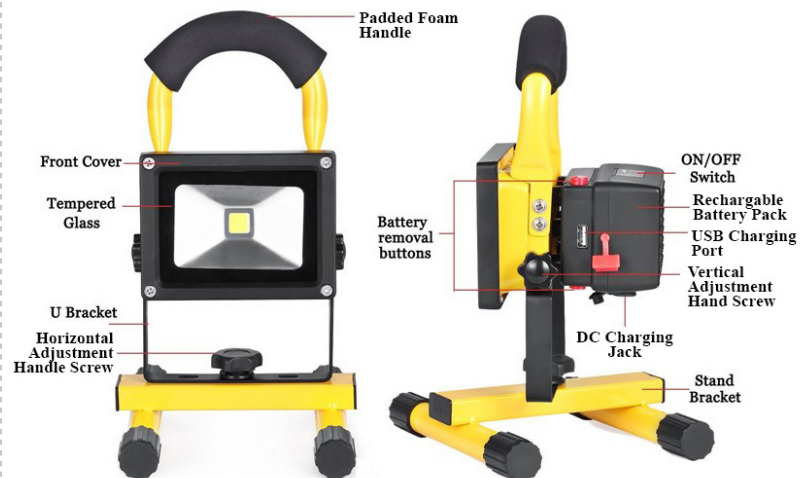

Proper Use

- Only use the charger included with the lamp.
- Do not turn on the light when charging.
- Do not use a modified or damaged charger.
- Do not leave the lamp charge on over 24 hours.
- Do not disassemble the lamp.
- Recharge the lamp every six months when not used.

Warnings

- DO NOT place batteries and devices in the fire or high temperature
- DO NOT tamper with battery
- DO NOT puncture or damage the batteries
- DO NOT use batteries that appear damaged
- DO NOT immerse or expose batteries to water
- DO NOT alter or modify the batteries
- DO NOT attempt charging the batteries in any manner other than prescribed in this manual
- DO NOT dispose the battery in fire or water