

**Important: Read all instructions prior to installation.**

## LED Bollard Light



BLR-30K20W-740BRT


### Safety and Notes

- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Ensure all mounts and fasteners are securely installed. Failure to properly install fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

### Specifications


Check product label for specific electrical specifications related to installation.  
Improper installation will void warranty.

### Wiring Diagram

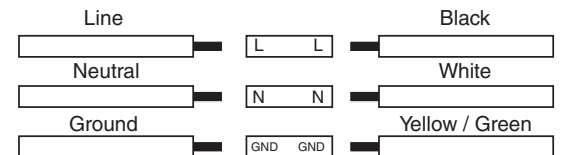


### Installation


Note: Installation requires mounting kit BLR-KIT, which is sold separately from bollard.




1. Install conduit in intended location.




2. Assemble base by placing two triangles onto provided rods. One triangle should be located at the bottom near the bend and the other should be located at the bottom of the threaded portion of the rod.




3. Assembled base should be placed around conduit and encased in concrete/cement with about 1.5–2 inches of thread exposed.  
Note: Make certain rods are level before concrete/cement sets.



4. Place mounting base over exposed rods and secure with provided hardware.

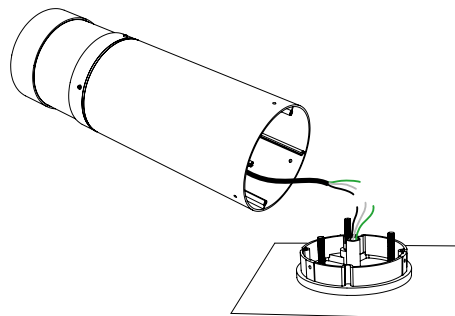

5. With supply power off, connect wiring.

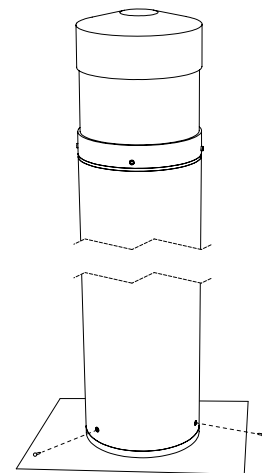

6. Place bollard onto mounting base, making certain set screw holes align. Install set screws to secure bollard in place.

