


Important: Read all instructions prior to installation.

Selectable CCT Slim Down Light




Wiring Diagram

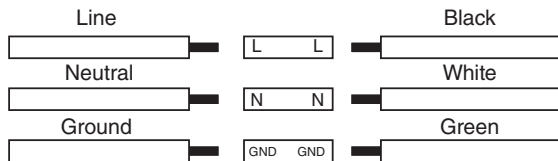

Installation

1. Cut an appropriate cutout for the light [approx. 6.1 in. (155 mm)].
2. Set color temperature of light using the switch on the side of the junction box.
3. With supply power off, connect wiring and mount junction box.
4. Connect light to junction box.
5. Fold back spring clamps and insert light into cutout.

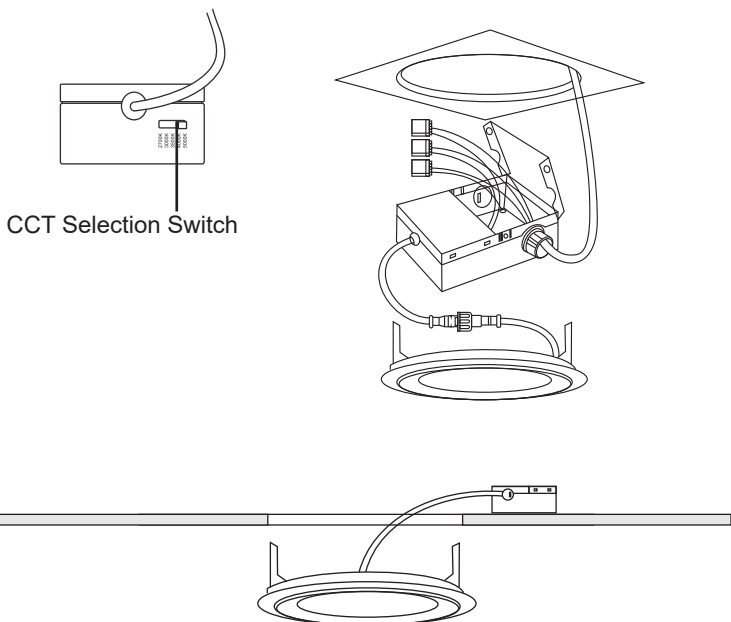

Specifications

Model	DLS6D-F1-SW5A12-120V
Operating Temperature	14°–113° F (-10°–45° C)
IP Rating	IP20
Dimming	TRIAC

Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

Safety and Notes

When working with electrical components, make sure you turn off the power at the main breaker and that your eyes are properly protected.

IMPORTANT: Please read carefully and save these instructions, as you may need them at a later date.

- Make all electrical and grounded connections in accordance with the National Electrical Code (NEC) and any other applicable state and local codes.
- Installation and service of luminaires should be performed by a qualified licensed electrician.
- Verify that supply voltage is correct by comparing it with luminaire label information.

READ AND FOLLOW BELOW SAFETY INSTRUCTIONS

- To prevent wiring damage or abrasion do not expose wiring to edges of sheet metal or other sharp objects.
- Supply conductors (power wires) connecting the fixture must be rated minimum 90° C. If uncertain, consult an electrician.
- Type IC Rated for direct contact with insulation.
- Suitable for damp locations.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support weight of the fixture. Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, this matter should be referred to the seller.

Note: Before beginning the installation, make sure all power is off—shutting power off in breaker box to areas where down lights are to be installed is recommended.