

Back-lit LED Panel Light

INSTRUCTION MANUAL

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLTION AND RETAIN FOR FUTURE REFERENCES.

! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician


Size	Product Model	Power	Working Current	Input Voltage	CCT	Viewing Angle	Ra	PF	Dimmable	Warranty
2x2	BPL-22-40W-L-H	30W/35W/40W	0.4A	AC100-277V	5000K	120°	>80	>0.9	0-10V	5 Years
2x4	BPL-24-50W-L-H	30W/40W/50W	0.5A		4000K 3500K					

Note: Above is the normal parameters, the following functions can be achieved according to customers requests.


1. Kelvin Temperature is optional.
2. Emergency is available

Installation Instruction


1. Remove 2x2 or 2x4 the from ceiling

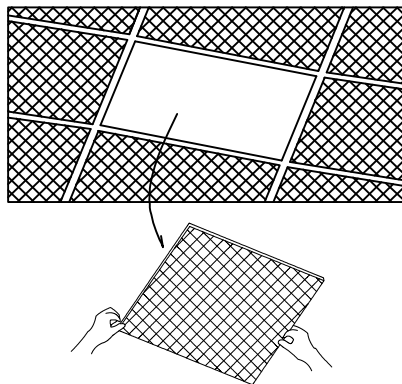

2. Put on the LED panel.

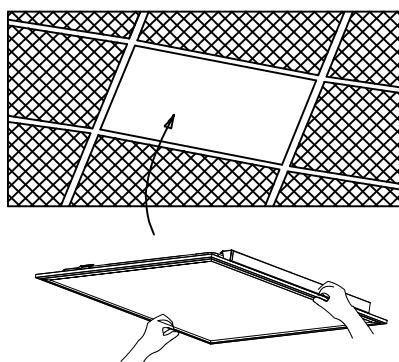

3. Connecting wire: Pls connect AC wire of driver at L(Black), N(White) and G(Green) for normal working; if dimming function needed, it also needs be connected for the both dimmable wires in grey and purple.

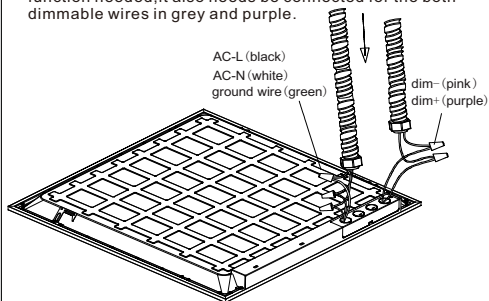

4. Fixed wire hose on the panel, Then installation is completed. (0-10V CCT&Watts adjustable isolated-driver)

