

Important: Read all instructions prior to installation.

Linear Grow Light

Included Parts

- 1 - Linear Grow Light
- 1 - Hanging Kit

Specifications

GLL-150W2F	
Input Voltage	120 VAC
Connection Type	NEMA 5-15P
Driver Input Voltage	100–277 VAC
IP Rating	IP65
LED Lifetime	50,000 Hours
Fixture Weight	14.1 lb (6.4 kg)




Safety and Notes

- Product should be installed and serviced in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

Installation Instructions

Beam Adjustment

Outer sections can be independently adjusted inward or outward. To adjust section, loosen adjustment screw on each end and adjust section to the desired position. Tighten adjustment screw to lock in place.

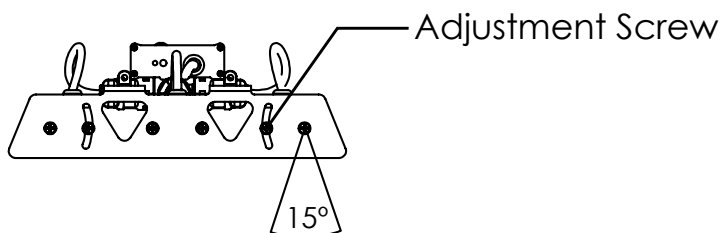

Using Additional Input Voltages

The attached cord and plug work with 120 VAC only. In order to use alternate input voltages (100–277 VAC), disconnect plug side of power cord at cord connection by unscrewing cover and then removing connection screws. When attaching alternate supply wires, make certain line, neutral, and ground are connected to appropriate terminals.

Cord Connection



Hanging/Mounting

Mounting cables will need to be spaced approximately 40" apart.

