



Parts needed to mount the LOC-30 extrusion



Mounting strip (A)



Extrusion (B)



LED strip (C)



Cover (D)



Clip (E)



End cap (F)


Tools needed for mounting:

- drill
- screwdriver


WARNING! All LED strips should be connected to a 12 V or 24 V power supply.

IMPORTANT: The mounting instructions present the basic form of assembly. More methods and related accessories can be found at www.KlusDesign.com


1. Drill a hole in the mounting strip (A)

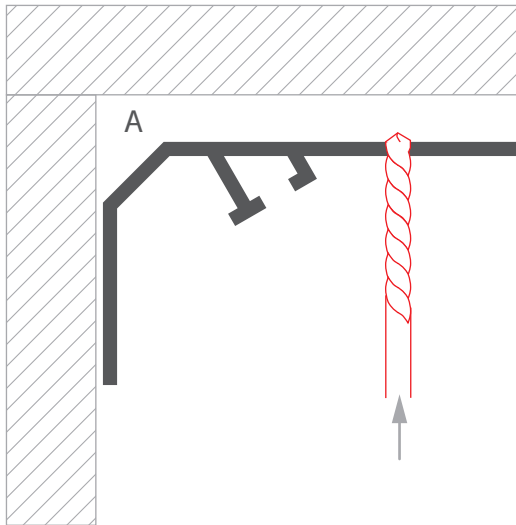

2. Attach the mounting strip to the mounting surface with suitable screws. Drill through the extrusion (B) to lead out the power cable.

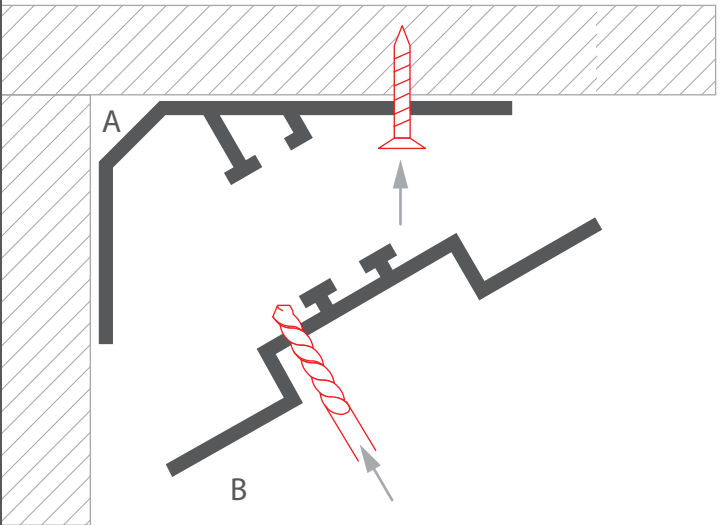

3. Slide the clips (E) into the extrusion (B), and then mount the LED strip (C) and lead out the power cable. The number of clips should be: 4 for 3.28" long profiles, 9 for 6.56ft long profiles and 14 for 9.84ft long profiles. First and last clip should be placed 1.96"-2.75" from the end of the profile.

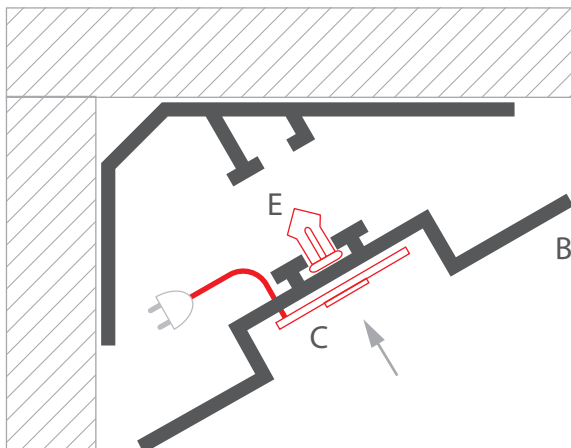

4. Insert the extrusion into the mounting strip, insert the cover (D) into the extrusion and insert the end cap (F)

