

Important: Read all instructions prior to installation.

LED Square Panel Light

Included Parts

- 1 - Square Panel Light
- 2 - Wire Nuts
- 2 - Screws
- 1 - Mounting Bracket


Optional Accessories (sold separately)

- 5–6" Can Retrofit Kit (LPS-CR56)

Safety and Notes

- Product should be installed in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support weight of the fixture. Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.


Wiring Diagram



Specifications

Model	LPSM-xK9-18
Voltage	120 VAC
Wattage	18 W
Beam Angle	120°
Operating Temperature	-4°–104° F (-20°–40° C)
IP Rating	IP20
Dimming	Triac
Warranty	5 years


Dimensional Drawings

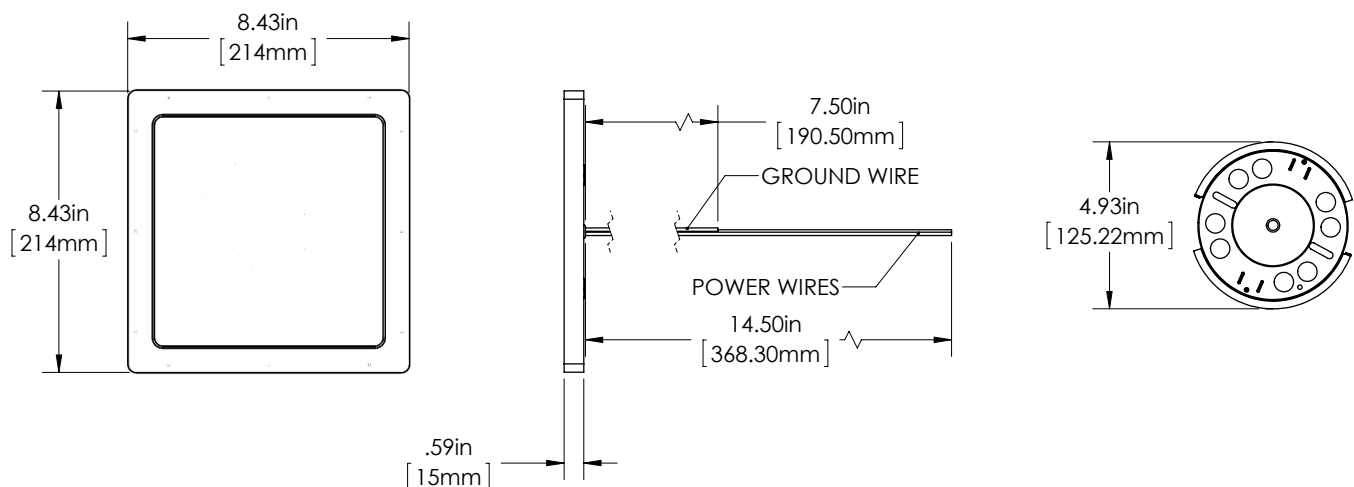


Important: Read all instructions prior to installation.

LED Square Panel Light


Junction Box Installation

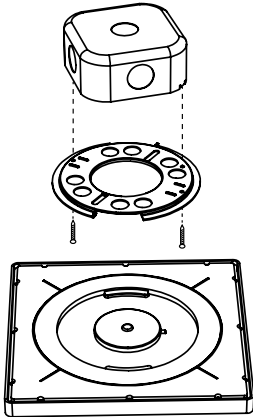

1. Attach mounting bracket to junction box, ensuring it is flush with ceiling.



2. Connect wiring.

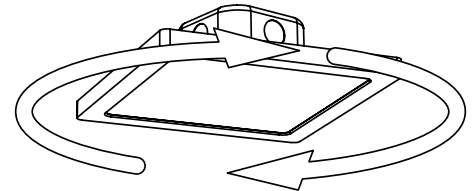

3. Line up light with bracket and turn clockwise to secure in place.

Can Light Retrofit Installation

1. Remove existing light and trim from can.
2. Attach can retrofit brackets to included mounting bracket.
3. Attach mounting bracket to light.
4. Attached supplied connector to light wiring. Connect socket adapter into socket.
5. Insert lamp into housing and ensure it's securely held in place.