


## Eco LED Strip Lights

3528 Strip Specifications

Project \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_



### FEATURES

- 24 VDC input available
- Multiple density options
- LED lifetime of 50,000 hours (L70)
- 8 mm strip width
- 3M adhesive backing
- Operating temperature of -4°-113° F (-20°-45° C)
- IP20 environmental rating

### APPLICATIONS

Some common applications include sign lighting, bias lighting, cove lighting, task lighting, backlighting, accent lighting, and under cabinet lighting.

### ACCESSORIES

Power Supplies



Strip Connectors



Controllers and Switches



Mounting Hardware and Housings



### AVAILABLE VERSIONS

18 LEDs/ft (60 LEDs/m)

- STN-BBLU-B6A-08B30M-24V
- STN-BGRE-B6A-08B30M-24V
- STN-BAMB-B6A-08B30M-24V
- STN-BYEL-B6A-08B30M-24V
- STN-BPUR-B6A-08B30M-24V
- STN-BULV-B6A-08B30M-24V
- STN-BRED-B6A-08B30M-24V
- STN-BPIN-B6A-08B30M-24V

36 LEDs/ft (60 LEDs/m)

- STN-BBLU-B6A-08C30M-24V
- STN-BGRE-B6A-08C30M-24V
- STN-BAMB-B6A-08C30M-24V
- STN-BYEL-B6A-08C30M-24V
- STN-BRED-B6A-08C30M-24V
- STN-BPIN-B6A-08C30M-24V

### SAMPLE PART NUMBER BREAKDOWN

## STN-BRED-B6A-08C30M-24V

FAMILY / CATEGORY / COLOR			LED TYPE / SEGMENT		IP RATING	SIZE / DENSITY / VOLTAGE			
STN	B	RED	B	6	A	08	C	30M	24V
Strip Type	Strip Type	Color	LED Type	LED/Segment	IP Rating	Strip Width	Density	Length	Voltage
STN: Non-weatherproof	B: Single Color	AMB: Amber BLU: Blue GRN: Green PIN: Pink PUR: Purple RED: Red ULV: Ultraviolet YEL: Yellow	B: 3528	6: 6 LED/seg	A: IP20	08: 8 mm	B: 60 LEDs/m C: 120 LEDs/m	30M: 98.4 ft (30 m)	24V: 24 V

### SPECIFICATIONS

Model	STN-x-B6A-08B30M-24V	x-B6A-08C30M-24V
Power Consumption	138 W	288 W
Current Draw	58 mA/ft	121 mA/ft
Brightness	115 lm/ft	230 lm/ft
Efficacy	82 lm/W	79 lm/W
Beam Angle	120°	
Max Run	49.2 ft (15 m)	32.8 ft (10 m)



T 314.743.3067

F 314.972.6202

email: commercial-sales@superbrightleds.com

https://www.superbrightleds.com/cat/led-strips-and-bars/



Specifications are subject to change without notice.


# Eco LED Strip Lights

3528 Strip Specifications

## DIMENSIONAL DRAWINGS


### STN-x-B6A-08B30M-24V

- 49.2 ft (15 m) max run

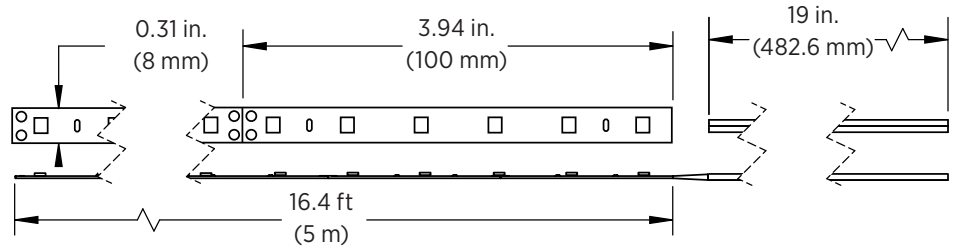

### STN-x-B6A-08C30M-24V


- 32.8 ft (10 m) max run

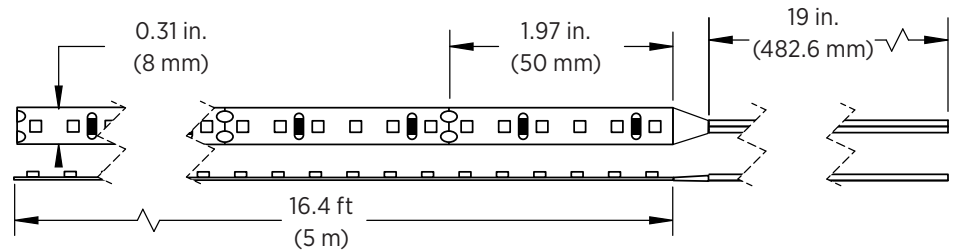



Note: The strip height for all strips shown is 0.08 in. (2 mm).

## STRIP FLEXIBILITY

Bending strips at sharp angles will damage circuit traces and void warranty.



Bends less than 15mm will damage circuit traces and void warranty.



Bending strips on horizontal plane will damage circuit traces and void warranty.

## NOTES



Specifications are subject to change without notice.

T 314.743.3067

F 314.972.6202

email: [commercial-sales@superbrightleds.com](mailto:commercial-sales@superbrightleds.com)

<https://www.superbrightleds.com/cat/led-strips-and-bars/>

