

Important: Read all instructions prior to installation.

Vapor-Proof Jelly Jar Lights


Specifications

Total Power Consumption	20 Watts
Operating Voltage Range	100~277 VAC
Operating Temperature	-40~104°F (-40 ~40 °C)
IP Rating	IP65
Dimmable	No
Conduit Thread	3/4"

Safety and Notes

- Product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce risk of electric shock, ensure main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Ensure all mounts are securely attached and will support weight of fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

Wiring Diagram

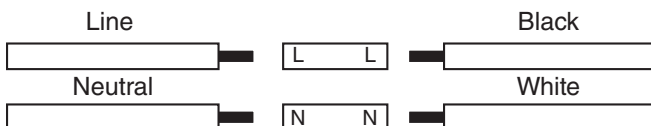

Installation Instructions

Surface Mount

1. Remove junction box section.
2. Apply supplied gasket or silicone compound (WFLS-GL1OZ or equivalent) to back of junction box and attach to surface.
3. Connect wires according to wiring diagram.
4. Reattach fixture to junction box using supplied gasket.

Mounting Using Junction Box Conduit NPT Knockouts

1. Remove junction box section.
2. Remove 3/4" plug from intended direction of conduit feed. Apply supplied gasket or silicone compound (WFLS-GL1OZ or equivalent) to back of junction box and attach to wall.
3. Feed conduit into junction box. Apply silicone compound (WFLS-GL1OZ or equivalent) to areas where conduit and junction box meet to create seal.
4. Connect wires according to wiring diagram.
5. Reattach fixture to junction box using supplied gasket.



Important: Read all instructions prior to installation.

Vapor-Proof Jelly Jar Lights

Dimensional Drawings

