


**Important: Read all instructions prior to installation.**

## LED Wall Pack



WPS-xK40-LBR

### Wiring Diagram

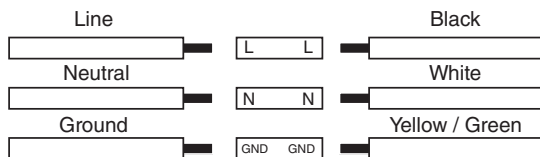

### Safety and Notes


- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- The photocell sensor can be disabled by bypassing its wiring internally. Make certain supply power is not connected when making changes to wiring.

### Specifications

Model	WPS-xKx-LBR
Operating Temperature	-22°–113° F (-30°–45° C)
IP Rating	IP65
Photocell Operation	Light will turn on when the ambient light level falls below 25 lx and will turn off when the ambient light level exceeds 130 lx.

Check product label for specific electrical specifications related to installation.  
Improper installation will void warranty.

### Optional Surge Protector Wiring



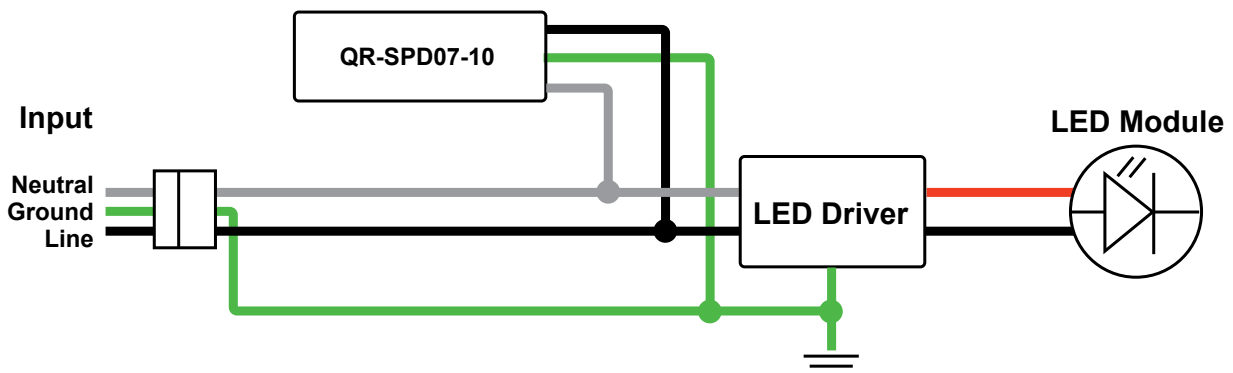


**Important: Read all instructions prior to installation.**

## LED Wall Pack

### Wall/Junction Box Installation

1. Remove four screws on fixture, then swing front housing to open light.
2. Remove front housing.
3. Drill holes in rear housing for mounting, and remove plug for wiring.
4. With supply power off, mount rear housing to junction box and connect wiring.
5. Reattach front housing.

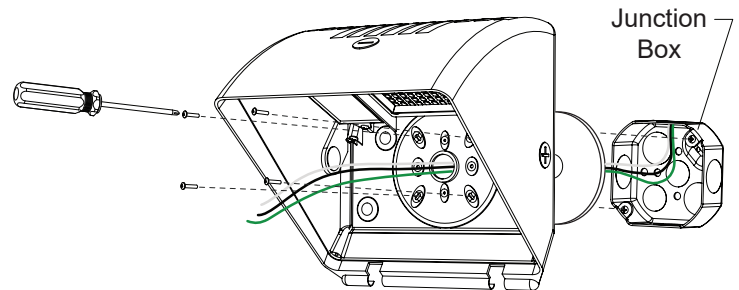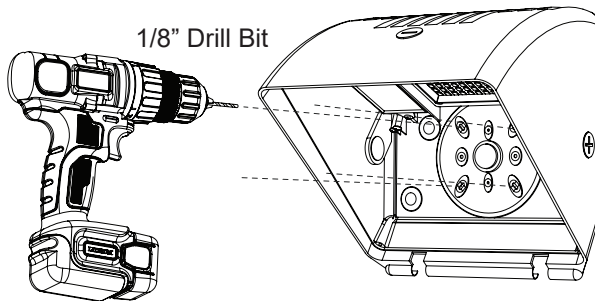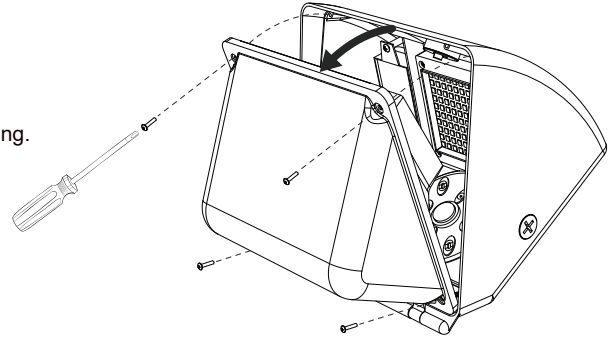

### Conduit Installation

1. Remove four screws on fixture, then swing front housing to open light.
2. Remove front housing.
3. Drill holes in rear housing, and mount housing to surface.  
Note: Sealant should be used around mounting points to avoid water intrusion.
4. Remove plug and attach conduit.
5. With supply power off, connect wiring.
6. Reinstall front housing.

