

**Important: Read all instructions prior to installation.**

## Dimmable Backlit LED Panel Light




LPDBL-U1-22-SW3C-SP40

### Safety and Notes

- Product should be installed and serviced in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

### Wiring Diagram

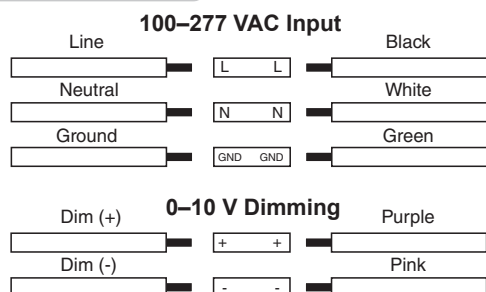


### Specifications

Model	LPDBL-U1-22-SW3C-SP40	LPDBL-U1-22-SW3C-SP50
Operating Temperature	-4°–113° F (-20°–45° C)	
IP Rating	IP40	





Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

### Installation

1. Turn supply power to circuit off. If installing as a retrofit, remove existing fixture.
2. Open driver box and remove knockout(s) for wiring. Make electrical connections using wiring diagram. Once complete, resecure driver box cover.
3. Select wattage and CCT using built-in switches on the driver box.

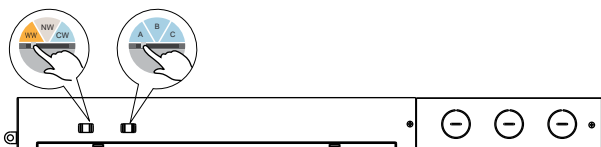

4. Bend out safety tab to be vertical, then upper portion out 90 degrees. It is recommended that a safety cable be installed to anchor the fixture as well.
5. Lay fixture into T-grid.

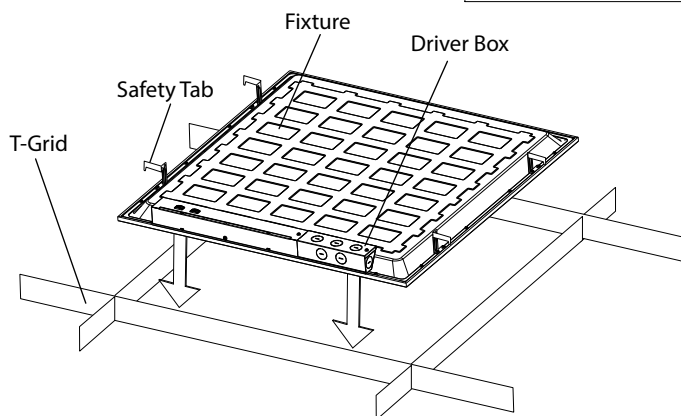

Note: Tabs should secure light in T-grid while still allowing reinstatement of adjacent ceiling tiles.



Rev Date: V1 08/03/2021

4400 Earth City Expy, St. Louis, MO 63045

• 866-590-3533

• [superbrightleds.com](http://superbrightleds.com)