

# LVT Series

Low-Voltage Transformer Specifications

Project \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_



LVT-120W-12VAC

### Features

- 120 VAC input
- 12 VAC output
- Built-in timer and dusk to dawn sensor

### Application

Low-voltage transformers are an excellent solution powering and controlling low-voltage LED landscape lighting such as path lights and small area lights.

### Warranty

Three (3) Year Warranty

### Specifications

Model	LVT-60W-12VAC	LVT-120W-12VAC	LVT-200W-12VAC
Input Voltage	120 VAC		
Input Connection	1-15P		
Max. Input Amperage	0.6 A	1.2 A	2 A
Output Voltage	12 VAC		
Max. Output Wattage	60 W	120 W	200 W
Max. Output Amperage	5 A	10 A	16.7 A
Dimming	none		
Ambient Operating Temperature	-22°-104° F (-30°-40° C)		
IP Rating	IP54		
Weight	3.7 lb (1.7 kg)	5.3 lb (2.4 kg)	8.9 lb (4 kg)
UL Standard	UL 1838		

### Notes

### Available Models

- LVT-60W-12VAC
- LVT-120W-12VAC
- LVT-200W-12VAC

### Part Number Breakdown

Example: LVT-120W-12VAC

Family	Output Wattage	Output Voltage
LVT	60W [60 W] 120W [120 W] or 200W [200 W]	12VAC [12 VAC]

### Certifications and Compliances


LVT power supplies are ETL Listed in compliance with UL 1838.



# LVT Series

## Low-Voltage Transformer Specifications

### Dimensional Drawing

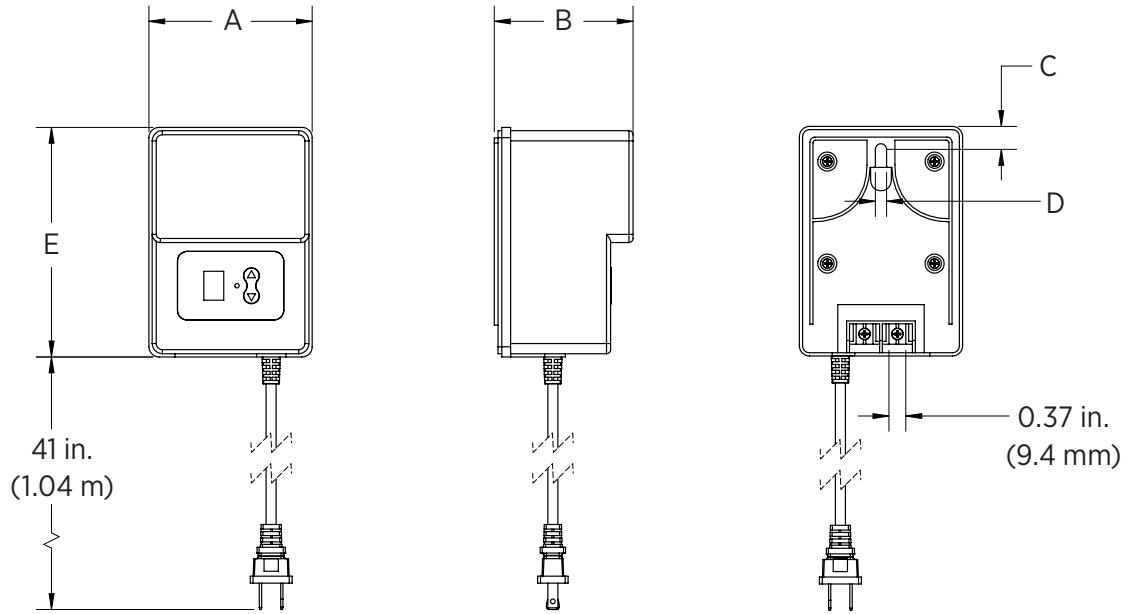

Model	LVT-60W-12VAC	LVT-120W-12VAC	LVT-200W-12VAC
A	3.3 in. (84 mm)	4 in. (102 mm)	4.7 in. (178 mm)
B	2.9 in. (73 mm)	3.4 in. (86 mm)	3.9 in. (98 mm)
C	0.54 in. (14 mm)	0.6 in. (15 mm)	0.7 in. (18 mm)
D	0.2 in. (5 mm)	0.28 in. (7 mm)	0.3 in. (7.5 mm)
E	5.4 in. (138 mm)	5.6 in. (143 mm)	7 in. (178 mm)
F	0.5 in. (13 mm)	0.8 in. (21 mm)	0.8 in. (21 mm)

