


Dimmable Recessed LED Troffer Light

Dimensional Drawings

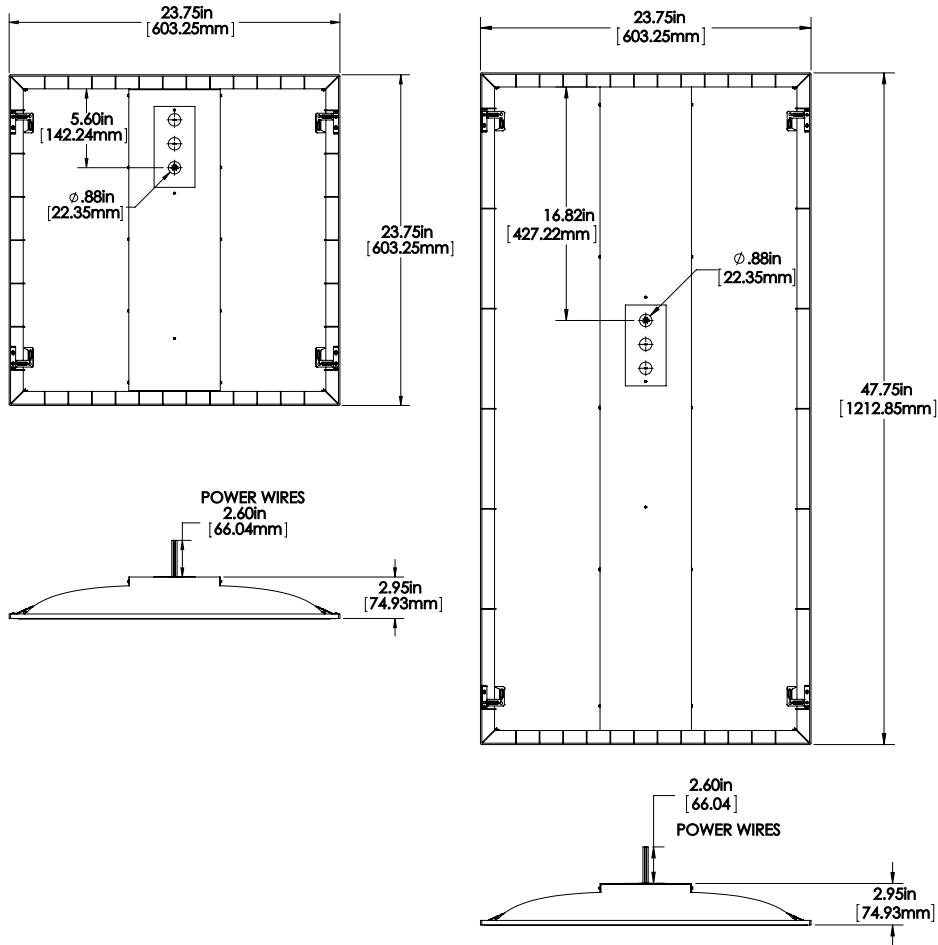

Dimmable Recessed LED Troffer Light

PTLFD Series

User Manual



Dimmable Recessed LED Troffer Light

Included Parts

1 - Troffer Light


Specifications

PTLFD-	xK2201-35W-2	xK2401-50W-2
Operating Voltage	100–277 VAC	
Power Consumption	35 W	50 W
Operating Temperature	-4°–113° F (-20°–45° C)	
Environmental Rating	IP40	
Dimming	0–10 VAC	
Weight	4.875 lb (2.21 kg)	8.25 lb (3.74 kg)

Safety Information

- Product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into the lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

Wiring Diagram

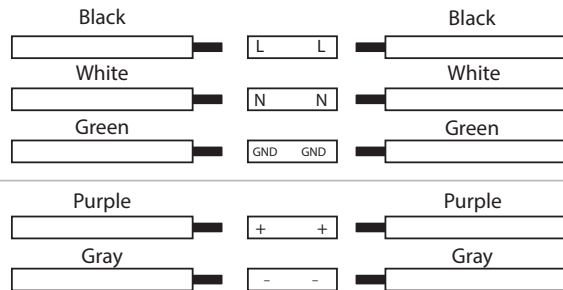

Installation Instructions

1. Make all electrical connections.
2. Bend out safety tab to be vertical, then upper portion out 90 degrees.
3. Lay fixture into T-grid.

Note: Tabs should secure light in T-grid while still allowing reinstallation of adjacent ceiling tiles. A #8 x 1/4" sheet metal screw may be used to secure the fixture also.

