

Important: Read all instructions prior to installation.

LED Post Top Area Light

Included Parts

- 1 - area light
- 1 - shorting cap or photocell (depending on model)
- 4 - position locking screws
- 6 - post locking screws


Safety and Notes

- Product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into the lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.



Installation Instructions

1. Remove the upper panel from the light. Slide the CCT selection switch to desired CCT (3000K, 4000K, or 5000K). Reinstall upper panel.
2. Rotate light to correct angle and lock in place using provided screws.
3. Install shorting cap/photocell.
4. Remove supply power from intended circuit.
5. Connect wiring, as shown in diagram below.
Note: Lead wire is 2 ft. (0.6 m) long.
6. With retaining screws backed out, place light on top of post. Tighten in place and apply power.

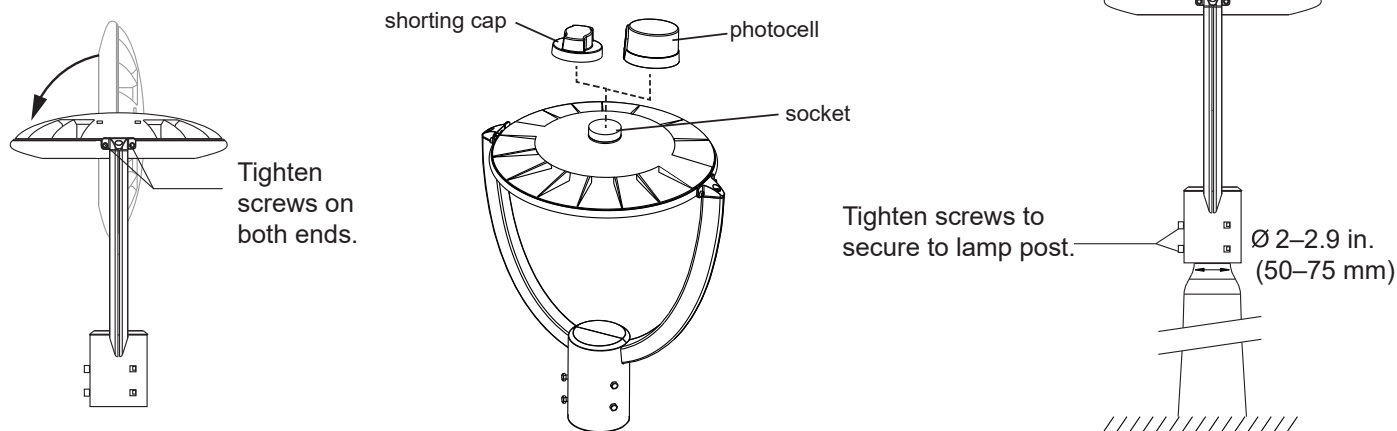

Specifications

PTLP2-	SW55W-HCGBR35	SW75W-HCGBR35
Power Consumption	55 W	75 W
Operating Voltage Range	100-277 VAC	
Dimming	1-10 V	
Photocell Operation	on at 10 lx (dusk), off at 60 lx (dawn)	
Ambient Operating Temperature	-4-113° F (-20°-45° C)	
IP Rating	IP65	
Weight	10.75 lb (4.9 kg)	
Mounting Pole Diameter	2-2.9 in. (52-75 mm)	
Suggested Mounting Pole Height	6.5-26.25 ft (2-8 m)	

Wiring Diagram

