

## PRODUCT DESCRIPTION

Small dimensions, combines two functions, glass or other material can be mounted to the profile and illuminated by LED, ability to mount to different surfaces ( walls, floor, ceiling etc.), modern design, environment friendly.

Patent Number: US D702,875 S


- Solid fixing and backlighting of transparent glass or plastic panel

FINISH :

Silver anodized ☐

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	



## TECHNICAL SPECIFICATION

### Application

- for making appealing, backlit decorations on the edge of signs and boards

### Assembly


- panel held in the fixture by means of a series of expansion bolts hidden in the profile interior - on the surface of walls and ceilings it is mounted on the heads of bolts

### Additional information

- panel thickness 6 mm (approx. 0.25")
- with the profile attached horizontally, the panel cannot stand from the ceiling more than 51 cm (20")
- when the profile is mounted vertically, the panel cannot protrude more than 51 cm (20") from the wall. Its vertical dimension may not be less than 60% of the horizontal dimension
- the length of the panel cannot exceed the length of the profile
- spece for LED strip: 0.44" / 11.2 mm


Turn off LED lights during peak day light hours in outdoor applications to avoid excessive heat buildup which will result in diminished LED life.

TECHNICAL DRAWING

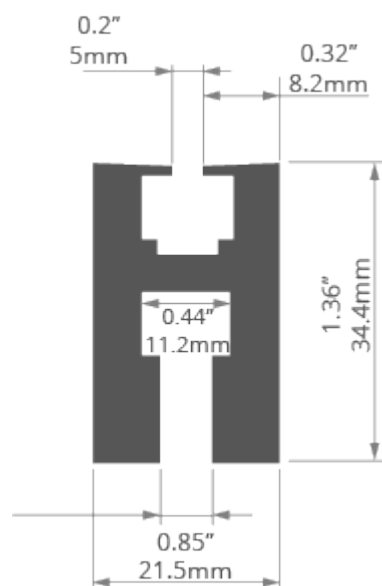


## RELATED PRODUCTS

### END CAPS



3D EX-ALU End cap  
Ref: 0962



3D EX-ALU End cap with hole  
Ref: 1452




EX-ALU End cap  
Ref: 0963

### ACCESSORIES




8,8x1,2 Gland  
Ref: 00802


### LED TAPES




C1-0W  
Ref: C1-0W



C2-1.5W  
Ref: C2-1.5W




C3-6W  
Ref: C3-6W



K-1210-12V  
Ref: K-1210-12



K-1210-24V  
Ref: K-1210-24



K-1215-RGB-12V  
Ref: K-1215-RGB-12V




K-1215-RGB-24V  
Ref: K-1215-RGB-24V




K-1220-12V  
Ref: K-1220-12



K-1220-24V  
Ref: K-1220-24



K-1225-RGB-12V  
Ref: K-1225-RGB-12V




K-1225-RGB-24V  
Ref: K-1225-RGB-24V




K-1275-12V  
Ref: K-1275-12




K-1275-24V  
Ref: K-1275-24




K-1275-RGB-12V  
Ref: K-1275-RGB-12V




K-1275-RGB-24V  
Ref: K-1275-RGB-24V




K-1530-RGB+W-24V  
Ref: K-1530-RGB+W-24V




K-1820-HD-24V  
Ref: K-1820-HD-24




K-1910-HD-24V  
Ref: K-1910-HD-24




K-1920-120-RGB-24V  
Ref: K-1920-120-RGB-24V



K-22/50-1728-24V  
Ref: K-22/50-1728-24V



K-27/65-1920-24V  
Ref: K-2765-1920-24V



K-30/18-1770-24V  
Ref: K-30/18-1770-24V



K-LR-1000-24V  
Ref: K-LR-1000-24



WP-K-1210-12V  
Ref: WP-K-1210-12



WP-K-1210-24V  
Ref: WP-K-1210-24



WP-K-1220-12V  
Ref: WP-K-1220-12




WP-K-1220-24V  
Ref: WP-K-1220-24




WP-K-1220-IP65-12V  
Ref: WP-K-1220-IP65-12V



WP-K-1220-IP65-24V  
Ref: WP-K-1220-  
IP65-24V



WP-K-1275-12V  
Ref: WP-K-1275-12




WP-K-1275-24V  
Ref: WP-  
K-1275-24



WP-K-1640-HD-IP65-24  
Ref: WP-K-1640-HD-  
IP65-24



WP-K-1910-HD-IP65-24  
Ref: WP-K-1910-HD-  
IP65-24



WP-K-1920-120-RGB-24V  
Ref: WP-K-1920-120-  
RGB-24V