


Important: Read all instructions prior to installation.

4-Foot Linkable LED Shop Light

Linking Fixtures

Plug the 1-15P plug into the end of another light to link the two. No more than 10 lights should be placed in one run.


Dimensional Drawings

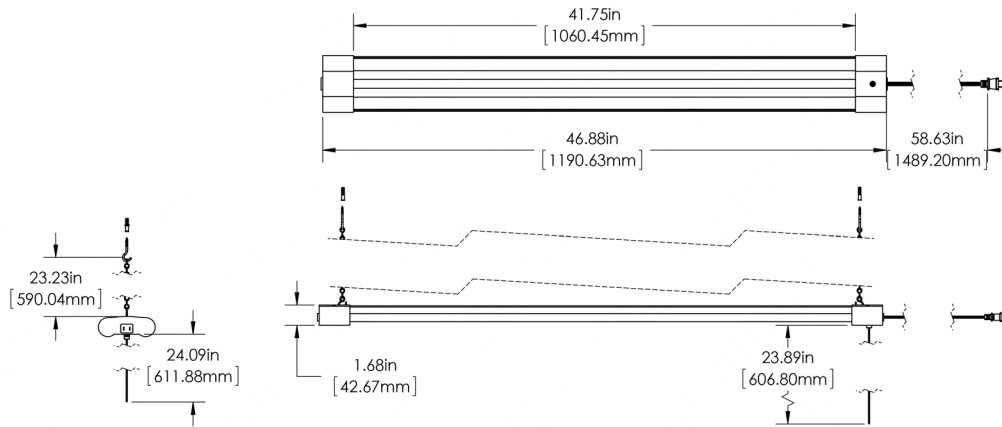

4-Foot Linkable LED Shop Light

SLLP-40K4-40-F

User Manual

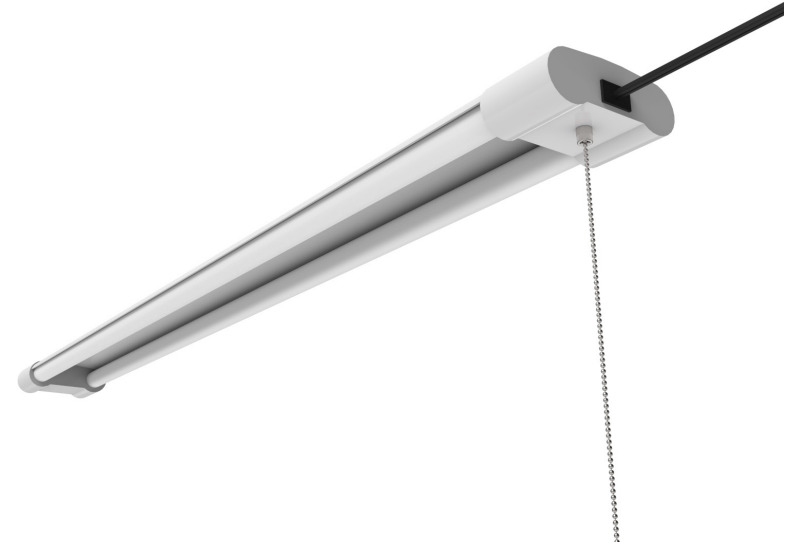

4-Foot Linkable LED Shop Light

User Manual


Part Number:

SLLP-40K4-40-F

Included Parts

- 1 - 4' LED Shop Light
- 2 - 2' Chain with S-Hook
- 3 - Mounting Hook *
- 3 - Mounting Anchor *
- 2 - Screws (for surface mounting)

*Two anchors and hooks required for installation

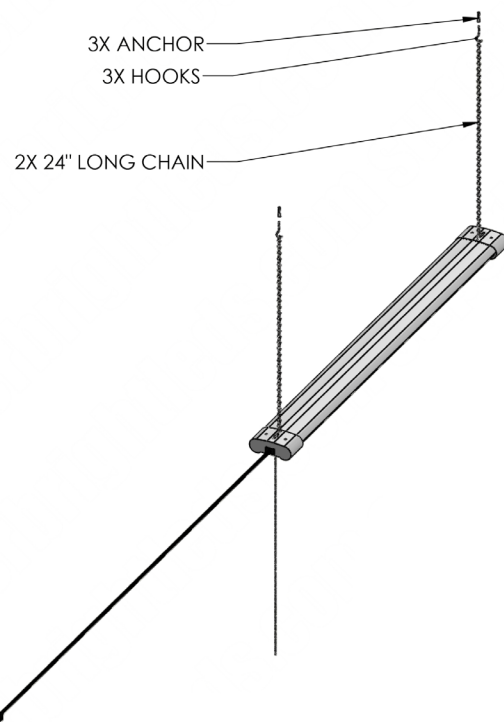


Safety and Notes

- This product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into the lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- While power supply can be linked (up to ten lights), each light is still actuated by its own individual pull chain.
- Do not install in a location that is damp or in proximity to a radiant heater.

Specifications


SLLP-40K4-40-F	
Total Power Consumption	40 Watts
Current Draw @ 120VAC	365 mA
Dimmable	No
Connection Type	1-15P
IP Rating	IP20
Operating Voltage Range	120 VAC
Operating Temperature	-4 ~ 104°F (-20 ~ 40 °C)
Fixture Weight	5.2lbs (2.3 Kg)

Installation Instructions For Single Light



Suspension Mount

1. Measure anchors for appropriate size and drill two holes, 43 inches apart.
2. Insert anchors and thread in hooks.
3. Place end of chain with no hook around the ceiling mounted hooks.
4. Hook shop light securely to chain hooks.

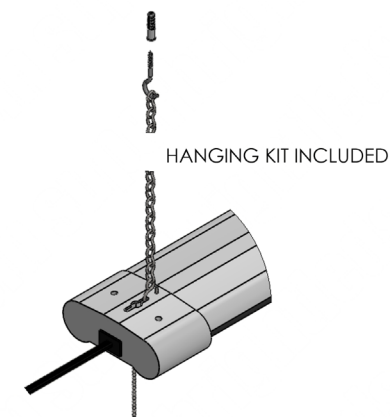

Surface/Flush Mount

1. Mount the two provided screws 44 3/8 inches apart. Leave a gap of approximately 1/16 inch between surface and screw head.
2. Slide the light onto the screws. Adjust screws as needed to ensure light is securely mounted.

