

Important: Read all instructions prior to installation.

Recessed Downlight LED Retrofit Kit



SMDJ-x15W

Specifications

SMDJ Specifications	
Operating Temperature	-22°–122° F (-30°–50° C)
Dimming	TRIAC

Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

Compatible Dimmers

Lutron	Leviton
DVCL-153P-WH	6683
MACL-153M-WH	6672
S-600PR-WH	6631
SPSLV-600-WH	6633-P
DVLV-603P-IV	1A23O5
MALV-600-IV	0B33K1
MALV-600	
DVW-603PGH-WH	
4X603	
CTCL-153P	
SLV-600P-WH	
CT-603PG	
NT-1000	
S-603P	
DV-600P	
RA-6D	


Safety and Notes

- Caution—shock and fire hazard, do not use if light is damaged.
- Suitable for IC or non-IC installation.
- For indoor use only. Suitable for damp locations—avoid direct contact with water and liquids. Suitable for wet locations when installed in covered ceiling mount only.
- Clean with a soft damp cloth only, do not use chemical cleaners.
- Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Ensure fixture is securely mounted. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

Installation

RETROFIT

1. Switch supply power off.
2. Twist the socket adapter into the socket until securely tightened, then use the provided wire nuts to connect the light wiring to the provided adapter.
3. Ensure wiring stays in the can and bend torsion springs back, placing light into can. If the can has locking slots or tabs, rotate the light to lock the springs into place.

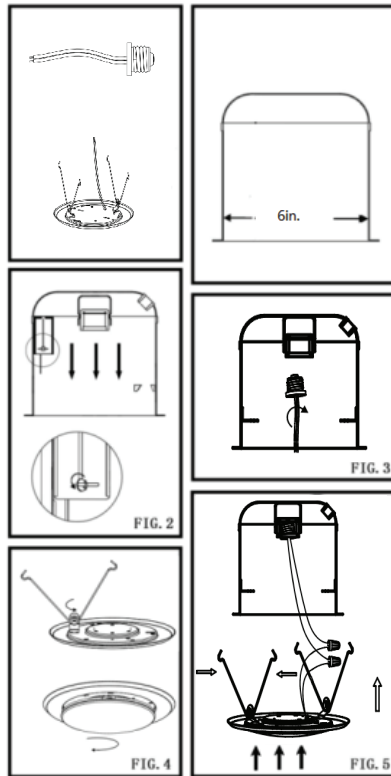

NON-RETROFIT

1. Switch supply power off.
2. Remove the lens.
3. Connect the light wiring to supply wire and attach ground wire to housing.
4. Attach light to junction box.
5. Reinstall lens and apply a bead of sealant around housing.

