Multi-color
LED Flexible Light Strip
Part Number: STN-DxK80-A6A-12B5M-24V
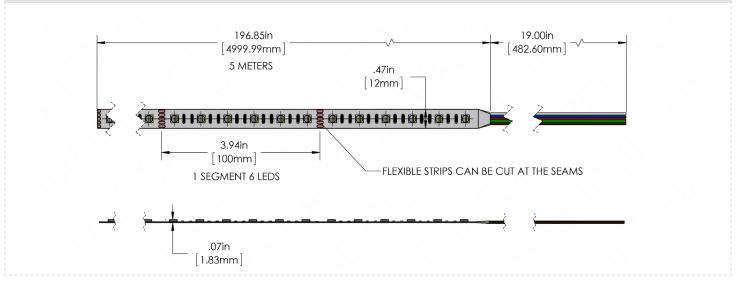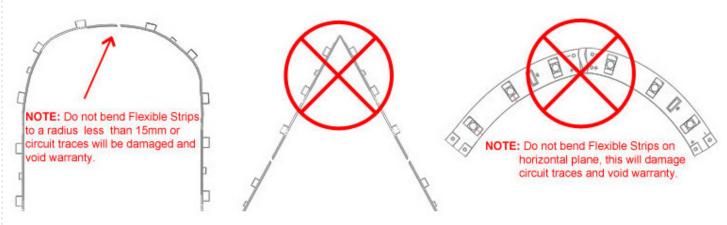
sbl

Features

Features **5050** high powered RGBW LEDs

24 VDC operating voltage

LED Light Strip features **adhesive backing** & **cuttable 6-LED segments** for easy installation

180° optics improve visibility with wider area illumination

Applications include back lighting, task lighting, cove lighting, retail, sign illumination, under cabinet, display case, accent decor, and automotive accents

RGBW

Standards and Certifications

UL LISTED   CE   RoHS Compliant   LIFE TIME WARRANTY

Accessories

Remote Dimmers & Switches   Strip Interconnects   Mounting Hardware & Extrusions   Power Supplies

General Product Specifications

Beam Angle	120 Degree		Color	3 Color Options
LED Type	5050 SMD		LED Lifetime	50000 Hours
Voltage	24 VDC		Strip Width	12mm (0.47in)
LEDs Per Segment	6		Length	5m (16.4ft)
IP/Environmental Rating	Non-Weatherproof		LED Density	18 LEDs/ft.
Wire Length	508mm (20in)		CRI	80+

Product Specifications

Color Options	White LED Wavelength	
STN-D30K80-A6A-12B5M-24V66	3000 K	
STN-D40K80-A6A-12B5M-24V	4000 K	
STN-D50K80-A6A-12B5M-24V	5000 K	

Dimensions

196.85in
[4999.99mm]
5 METERS

19.00in
[482.60mm]

.47in
[12mm]

3.94in
[100mm]
1 SEGMENT 6 LEDS

FLEXIBLE STRIPS CAN BE CUT AT THE SEAMS

.07in
[1.83mm]

Maximum Flexibility Precaution

NOTE: Do not bend Flexible Strips to a radius less than 15mm or circuit traces will be damaged and void warranty.

NOTE: Do not bend Flexible Strips on horizontal plane, this will damage circuit traces and void warranty.