

Single Color LED Flexible Light Strip

Part Number: STN-x-A6A-10B5M-24V



Features


Features **5050** high powered LEDs

24 VDC operating voltage


LED Light Strip features **adhesive backing** & **cuttable 6-LED segments** for easy installation

120° optics improve visibility with wider area illumination

Applications include back lighting, task lighting, cove lighting, retail, sign illumination, under cabinet, display case, accent decor, and automotive accents

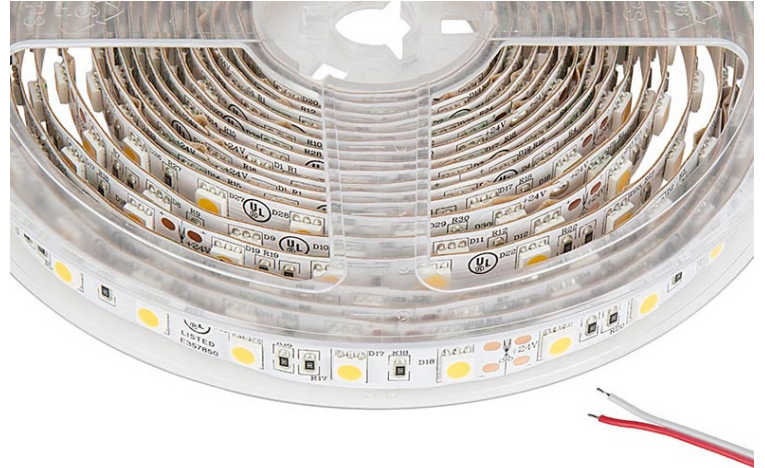

Standards and Certifications

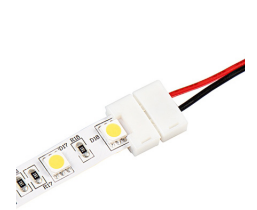

Accessories



Remote Dimmers & Switches



Strip Connectors



Mounting Hardware & Extrusions



Power Supplies


General Product Specifications

Beam Angle	120 Degree	Color	7 Color Options
LED Type	5050 SMD	LED Lifetime	50000 Hours
Voltage	24 VDC	Strip Width	10mm (0.39in)
LEDs Per Segment	6	Length	5m (16.4ft), 30m (98.4ft)
IP/Environmental Rating	Non-Weatherproof	LED Density	18 LEDs/ft.
Wire Length	508mm (20in)	CRI (white models)	80+

Product Specifications

Color Options	White LED Wavelength	Available Length [A]
STN-BRED-A6A-10B5M-24V	Red	5m (16.4ft)
STN-BRED-A6A-10B30M-24V	Red	30m (98.4ft)
STN-BGRE-A6A-10B5M-24V	Green	5m (16.4ft)
STN-BGRE-A6A-10B30M-24V	Green	30m (98.4ft)
STN-BBLU-A6A-10B5M-24V	Blue	5m (16.4ft)
STN-BBLU-A6A-10B30M-24V	Blue	30m (98.4ft)
STN-A65K80-A6A-10B5M-24V	6500K	5m (16.4ft)
STN-A65K80-A6A-10B30M-24V	6500K	30m (98.4ft)
STN-A50K80-A6A-10B5M-24V	5000K	5m (16.4ft)
STN-A50K80-A6A-10B30M-24V	5000K	30m (98.4ft)
STN-A40K80-A6A-10B5M-24V	4000K	5m (16.4ft)
STN-A40K80-A6A-10B30M-24V	4000K	30m (98.4ft)
STN-A30K80-A6A-10B5M-24V	3000K	5m (16.4ft)
STN-A30K80-A6A-10B30M-24V	3000K	30m (98.4ft)

Dimensions

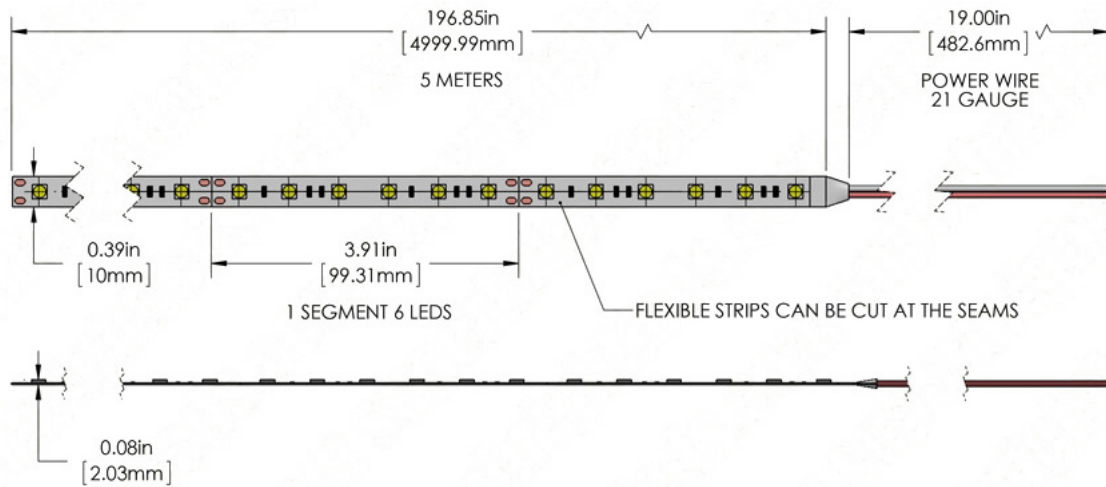

Maximum Flexibility Precaution

