


## TC Series

LED Job Site Light Specifications

Project \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_



### Description

LED temporary jobsite lights allow you to illuminate large areas such as tunnels, construction sites, parking areas, garages, docks, and other work areas. The design is light-weight and the LEDs are a durable, safe solution that are easy to install. These water-resistant lights are suitable for indoor and outdoor use. Each string uses five permanently connected lights on a 50 ft. cord and up to six sets can be linked in a run.

### Mechanical

- Aluminum and polycarbonate construction
- Yellow power cord for increased visibility and safety
- Construction grade integrated LED lamp, cord, and plug for easy powering and mobility
- 5 lamps per string, which can be linked up to 6 strings while maintaining waterproof connection
- Aluminum carabiner on each lamp for quick mounting
- Operating temperature of -4°-113° F (-20°-45° C)
- IP65 rated



### Electrical

- 120 VAC input with 1-15P plug
- Linkable up to 6 strings

### Photometrics

- 1,430 lumens per lamp (7,150 combined)
- 120° beam angle
- 5000K, 80+ CRI light

### Dimensions

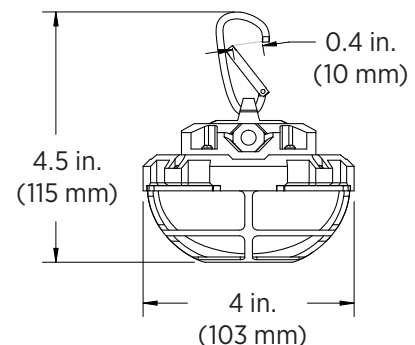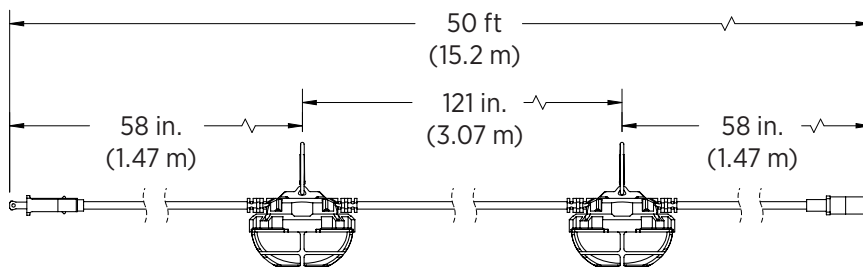

### Available Models

- TC-TSL-13W-50K-5

### Part Number Breakdown

Example: TC-TSL-13W-50K-5

Family	Wattage	Color Temperature	Bulbs per String
TC-TSL	13W [13 W]	50K [5000K]	5 [5 bulbs/string]

### Specifications

Model	TC-TSL-13W-50K-5
Brightness	1,430 per bulb (7,150 combined)
Operating Voltage	120 VAC
Power Consumption	65 W (13 W per bulb)
Current Draw	542 mA
Efficacy	110 lm/W
Color Temperature	5000K
Beam Angle	120°
CRI	80+
Dimming	none
IP Rating	IP65
Ambient Operating Temperature	-4°-113° F (-20°-45° C)
Product Weight	4.3 lb (1.95 kg)
Rated Life (L70)	50,000 hours

### Warranty

Five (5) Year Warranty

### Certifications and Compliances

These lights are ETL Listed.



T 866.811.5550  
 F 314.972.6202  
 email: commercial-sales@superbrightleds.com  
<https://www.superbrightleds.com/cat/portable-led-work-lights/>

Rev V1 Date: 04/12/2021  
 Specifications are subject to change without notice.  
 Printed in the U.S.A.