

**Important:** Read all instructions prior to installation.


## Portable LED Work Light

### Safety and Notes

- The light should not be stored or used in or around standing water.
- Product should be used in accordance with all applicable safety and electrical codes.
- A GFCI outlet should be used when operating the light(s) in damp environments or environments where exposure to water is a possibility.
- Do not use the light(s) in dangerous situations where an explosion-proof light is required.
- Avoid looking directly into the lamp when illuminated.
- Do not mount near radiant heat sources/heaters.

### Specifications

Part Number	TJWL-30	TJWL-70	TJWL-100T
Total Power Consumption	30 Watts	70 Watts	100 Watts
Operating Voltage Range	120 VAC		
IP Rating	IP65		
Electrical Connection	5-15P Plug		

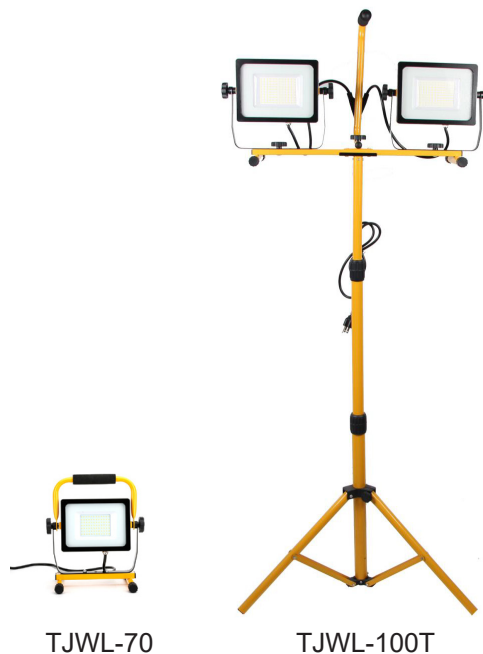

### Assembly Instructions

#### TJWL-30 and TJWL-70

Attach the "H" stand to the light bracket using the provided hardware (FIG.1).

#### TJWL-100T

Using provided hardware, attach both light brackets to the "H" stand, then attach carrying handle to "H" stand (FIG.2).

To use the tripod, seat the "H" bracket on the tripod and secure using the included locking screw (FIG.3).

