

## **Linear Light Series**

Date\_

Project Name \_\_\_\_\_

Type \_\_\_

### Industrial Linear LED Light Fixture

#### **Industrial LED Light**

Linear LED lights are the heavy-duty, superbright alternatives to traditional tube light fixtures. Perfect for commercial lighting, warehouse lighting, garage lighting, shop lighting, parking garage lighting, and more, the low-bay LED lights have powerful LEDs and high lumen outputs. These durable, weatherproof LED light fixtures consume much less energy than metal-halide (MH) fixtures. And with a life expectancy of 50,000 hours, the linear LED lights reduce costly repairs, disposal fees, and the need for replacements.


# TPLF-NW4-50 TPLF-HKO TPLF-NW2-30

#### **Specifications**

TPLF-NW2-30		
Intensity	2700 lumen	
Operating Voltage Range	100~277 VAC	
Beam Angle	180 degree	
LED Type	2835 SMD	
Number of LEDs	180 LEDs	
Color Temperature	4700K	
CRI	84 CRI	
Operating Temperature	-4 ~ 113°F (-20 ~ 45 °C)	
Total Power Consumption	31.5 Watts	
IP Rating	IP65	
Warranty	5 year	

TPLF-NW4-50		
Intensity	4500 lumen	
Operating Voltage Range	100~277 VAC	
Beam Angle	180 degree	
LED Type	2835 SMD	
Number of LEDs	288 LEDs	
Color Temperature	4700K	
CRI	86 CRI	
Operating Temperature	-4 ~ 113°F (-20 ~ 45 °C)	
Total Power Consumption	55 Watts	
IP Rating	IP65	
Warranty	5 year	

#### **Assembly Instructions**

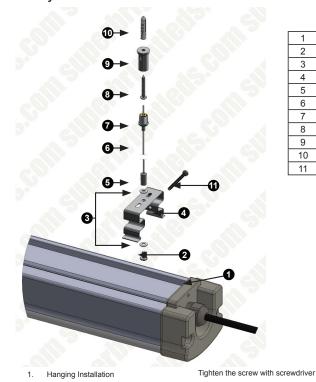

#### TPLF-HKO

1	LED Tri-Proof Light	
2	M4 x 8mm Screw	
3	M4 Flat Washers	
4	Mounting Bracket	
5	Hanging Wire Nut	
6	Hanging Wire	
7	Hanging Wire Screw	
8	M4 x 30mm Phillips Screw	
9	Hanging Wire Mount	
10	Plastic Anchor	
11	M3.5 x 40mm Locking Screw	

#### **Ordering Information**

LED Product	Length	Watt
TPLF	NW4 - Natural White, 4ft NW2 - Natural White, 2ft	<b>30</b> - watts <b>50</b> - watts

Color Temp	Lumens
4700K	2700 lumen
4700K	4500 lumen

Conventional UL/VDE standard wire for 18AWG / 3 x0. 75mm<sup>2</sup>
















#### **Dimensional Drawing**

