Important: Read all instructions prior to installation.

14" Flush Mount LED Ceiling Light Fixture

Specifications

Input Voltage (V)	Input Current (A)/(mA)	Rated Power (W)	Power Factor (PF)	Color Temperature (K)	Beam Angle (°)	Life Span (H)	Net Weight (Kg)
AC 120V 60Hz	0.2A 200mA	24W	0.9	4000	120	30000	0.7

Parts Included

1 - 1800 Lumen Flush Mount Ceiling Light - Natural White Color
2 - Mounting Screws
3 - Wire Nuts
1 - Instructional Sheet

Ø34.93cm [13.75in]

11.61cm [4.57in]

Ø9.00cm [3.54in]

Ø7.00cm [2.76in]

Mounting Screw Slot Locations

Installation

⚠ **Important:** All power should be turned off prior to installation by switching off circuit breaker or removing fuse at fuse box.
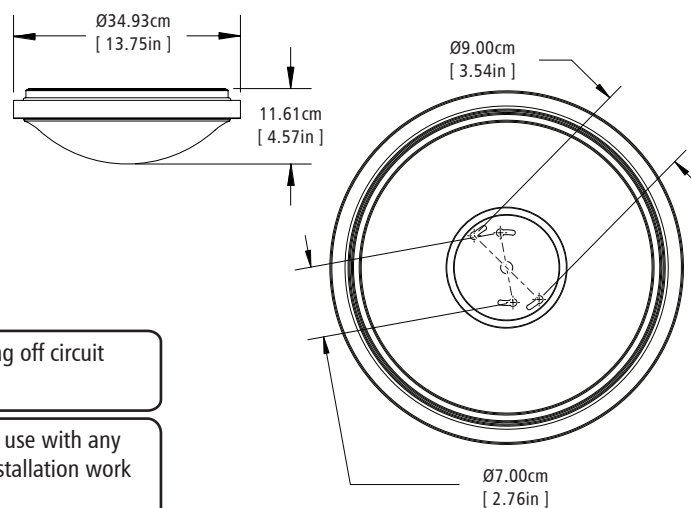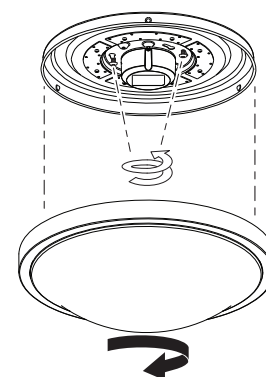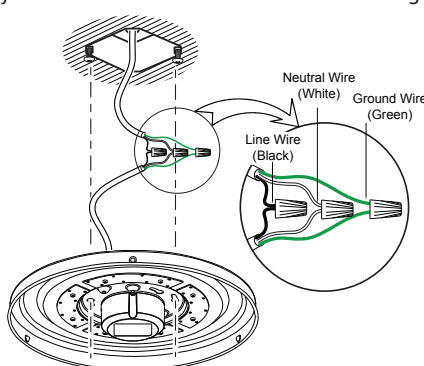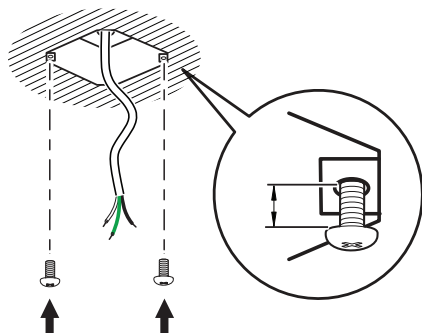
Note: Do not use insulation padding or similar material to cover fixture. Not for use with any lighting control system. Only a certified electrician should perform any installation work or repairs to this item.

Note: Suitable for damp locations; Not suitable for wet locations.

① Insert mounting screws (2) partially into installed standard ceiling box, leaving 2/3 of the threading exposed.

② Join wiring using included wire nuts (3), connecting line (black) to line, neutral (white) to neutral, and ground (green) to ground. Locate fixture over mounting screws and rotate until secure. Note: In some switching applications, the "Line" wire may be red instead of black. Substitute accordingly.

③ Tighten mounting screws until fixture is securely fastened. Attach the ceiling light housing to the mounted fixture, turning clockwise until fully secured.

Neutral Wire (White)
Ground Wire (Green)
Line Wire (Black)

Maintenance

To ensure maximum performance and product life, clean your ceiling light fixture regularly. Use a soft cleaning cloth and apply only gentle cleansers such as diluted dishwashing soap. Do not use alcohol or any other chemical cleaner.