

DATA SHEET

GIP LED extrusion – article number B4574

Product characteristics

The extrusion is made from high quality, double-anodized aluminum, designed for maximum of two flexible or rigid LED strips that are 8 - 10 mm wide. LEDs can be hidden behind a frosted cover in the semicircular shape G-L or square shape G-K, made of polymethyl methacrylate. Standard polypropylene end caps are used for the extrusion as supplementary accessories. End caps protect the extrusion from dust and other undesirable elements, which can make LED strips dirty and consequently deteriorate the lighting parameters. The extrusion can be mounted to surfaces with the use of double-sided adhesive tape, mounting glue or screws which guarantee easy and secure mounting of the extrusion to a desired surface.

Applications

The extrusion with LED light source is mostly used to create light illuminations inside rooms, but also to illuminate displays, cabinets, etc. Due to the possibility of installing two strips inside the extrusion it can be used as a primary energy-efficient light source.

Products related to the Extrusion



cover type G - L
frosted (00413)



cover type G - K
frosted (00415)



end cap GIP - L
without hole (00306)




end cap GIP - K
without hole (00307)

Technical specification

Ingress Protection Rating	IP 20
Available lengths	1 m / 2 m (can be cut to any size)
Material	body – aluminum, cover – poly (methyl methacrylate) – PMMA, end cap – polypropylene (PP)

Product are RoHS compliant.

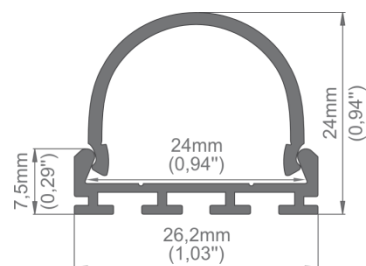

KLUS