

Light efficiency:

136 Lumen/Watt

Output: 13615 lm

Light quality:

CRI: 73.0


Peak: 5525 cd

Color temperature:

5134 K

Power: 100.3 W

PF: 1.0

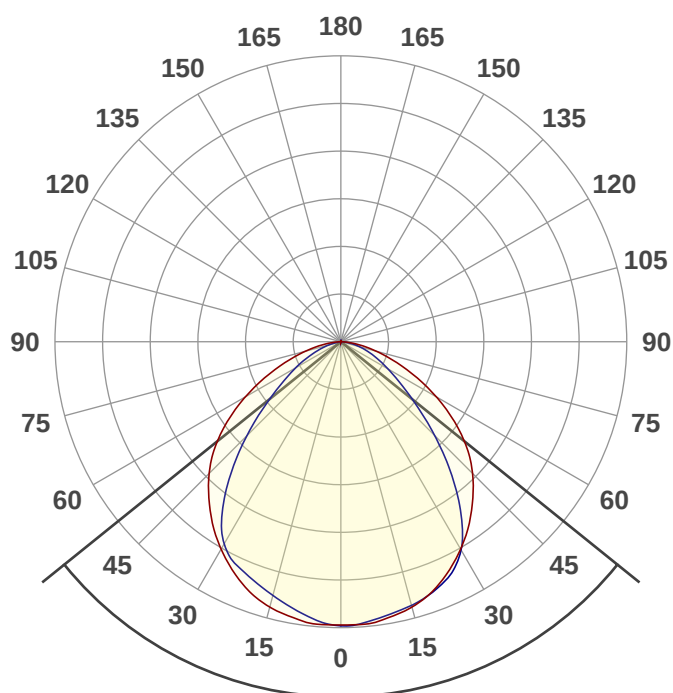

Product name:

AFL-50K100-110-x

Date and time:

10/1/2019 10:04:12 AM

Beam angle

102.3°




CIE 1931


x: 0.341

y: 0.346

Spectra

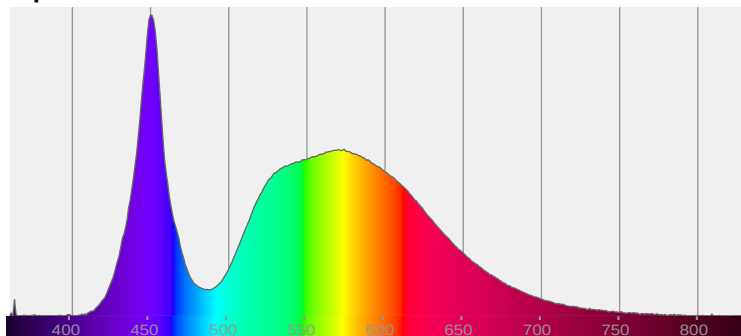

Power

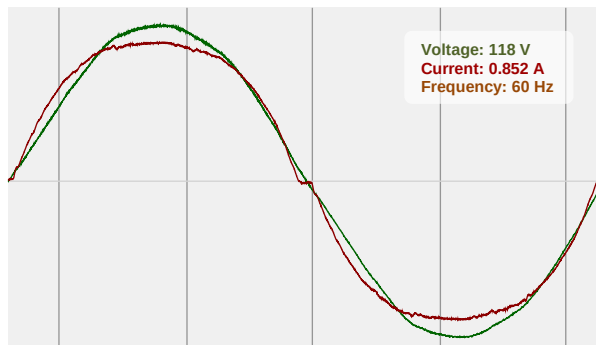



T 314.743.3067

F 314.972.6202

email: commercial-sales@superbrightleds.com



www.superbrightleds.com/

Color Specifications

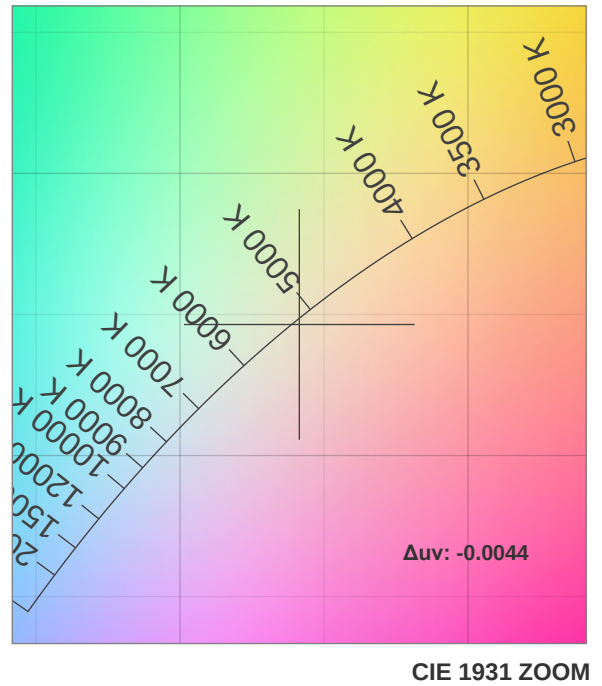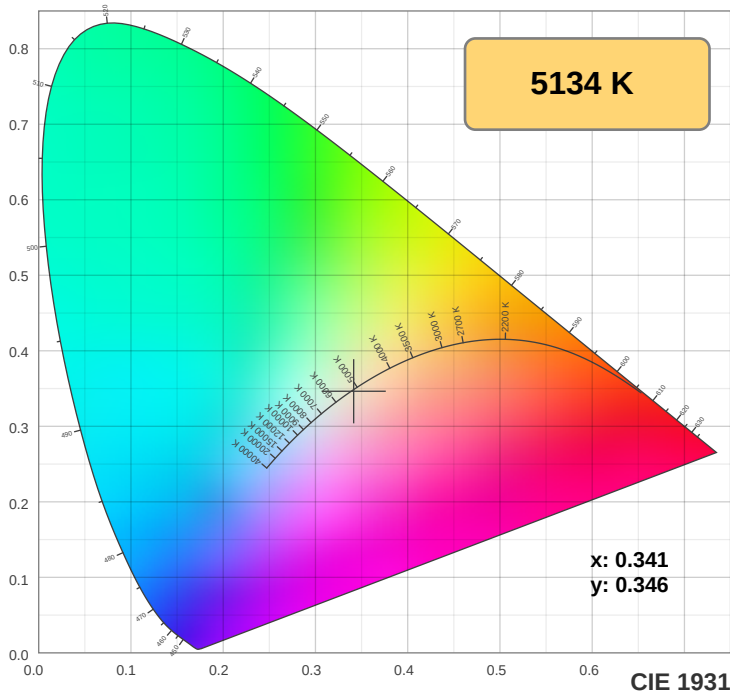

TM30: 69.9

CRI: 73.0 (R1-R8)

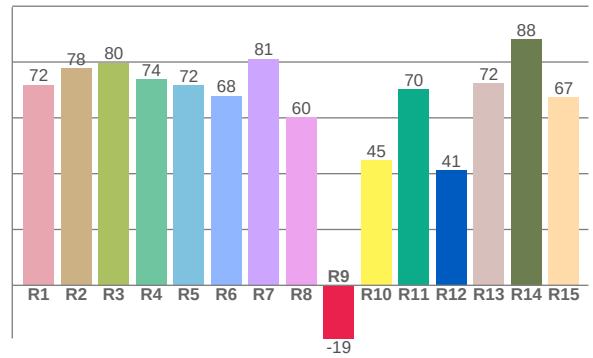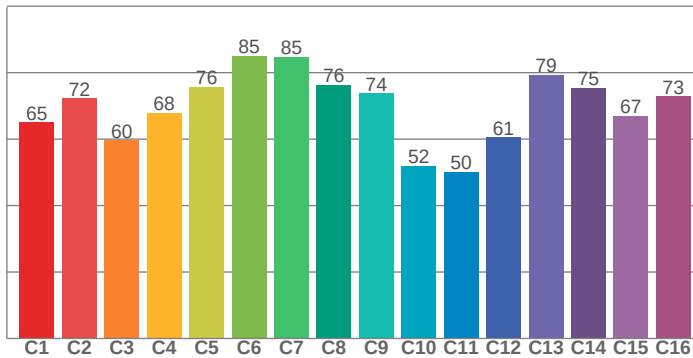

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
71.8	77.7	79.7	73.9	71.6	67.9	81.2	60.3	-19.0	44.7	70.2	41.2	72.5	88.2	67.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
65.1	72.2	59.7	67.9	75.8	85.1	84.9	76.3	73.8	52.0	50.1	60.6	79.4	75.4	66.9	72.8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79.1	92.8	58.4	53.5	65.8	70.6	75.0	84.3	88.7	70.9	65.1	66.5	69.9	60.3	67.7

CQS: 69.3

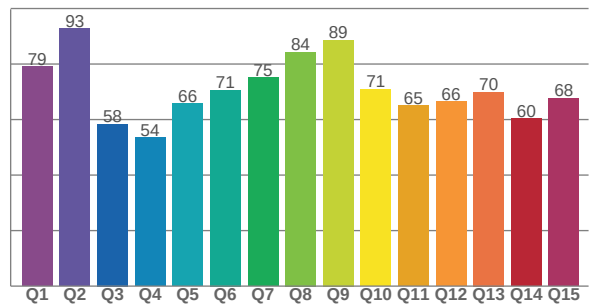

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5134 K	73.0	-19.0	69.9	94.0	69.3	0.341	0.346	0.211	0.321	-0.0044



T 314.743.3067

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/

TM30 Report







Rf 69.9

Fidelity index Rf


Rg 94.0

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	65	-17%	-2%
2	72	-12%	9%
3	60	-6%	20%
4	68	3%	18%
5	76	8%	11%
6	85	8%	-1%
7	85	-2%	-8%
8	76	-11%	-5%
9	74	-18%	9%
10	52	-13%	23%
11	50	-2%	29%
12	61	7%	20%
13	79	14%	4%
14	75	10%	-7%
15	67	4%	-22%
16	73	-3%	-16%

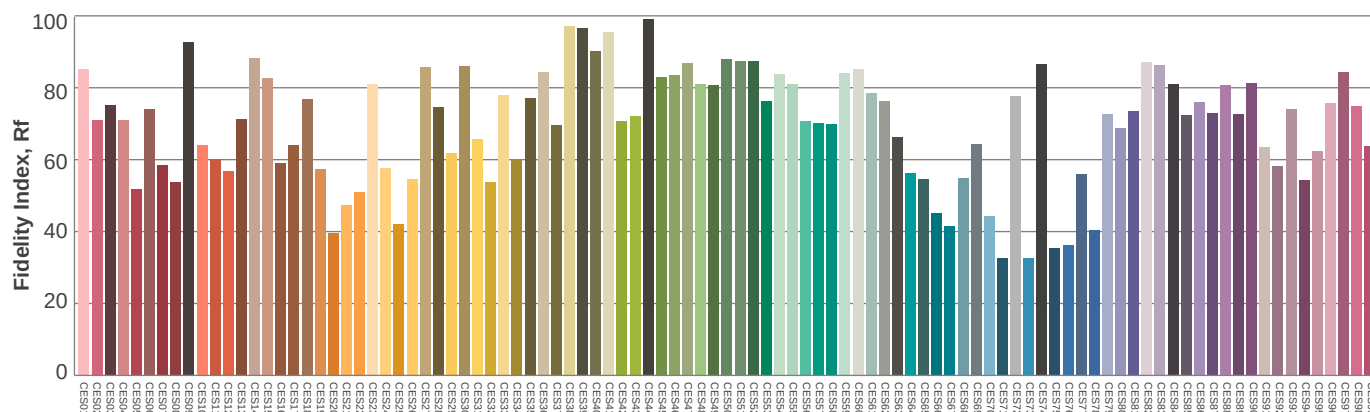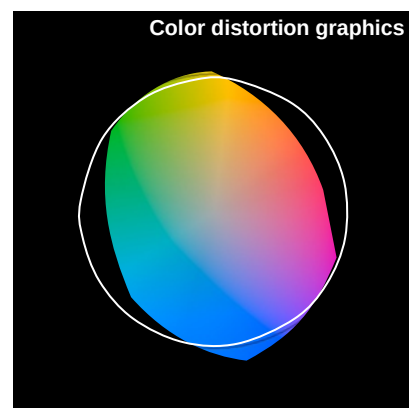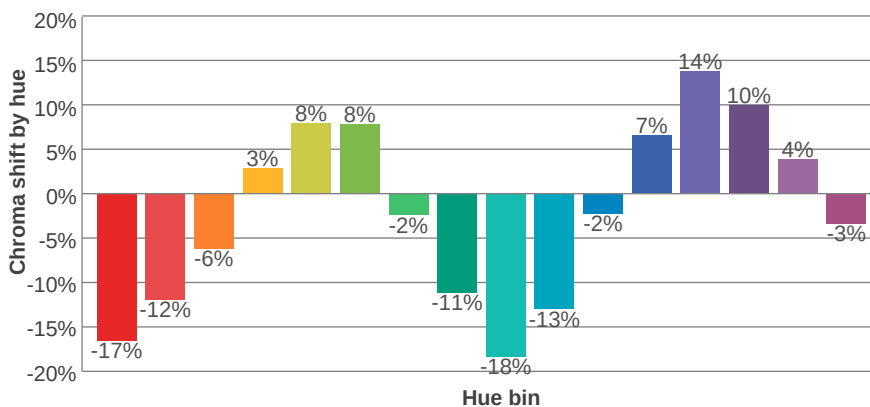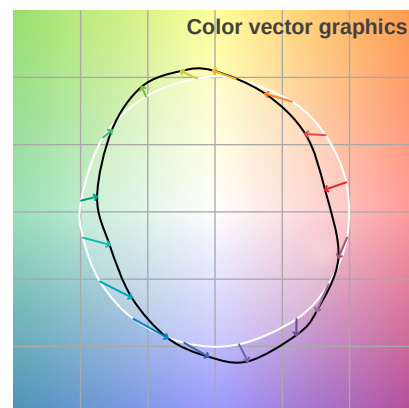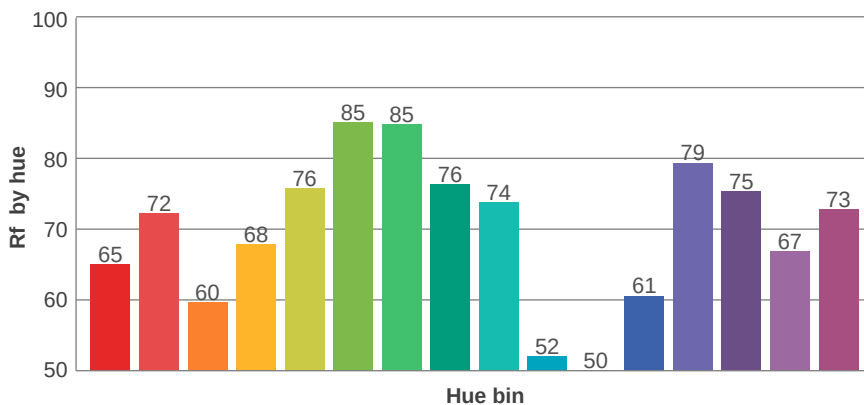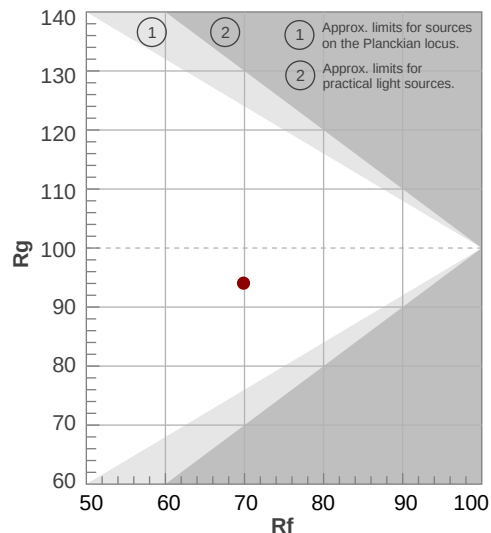

Illumination

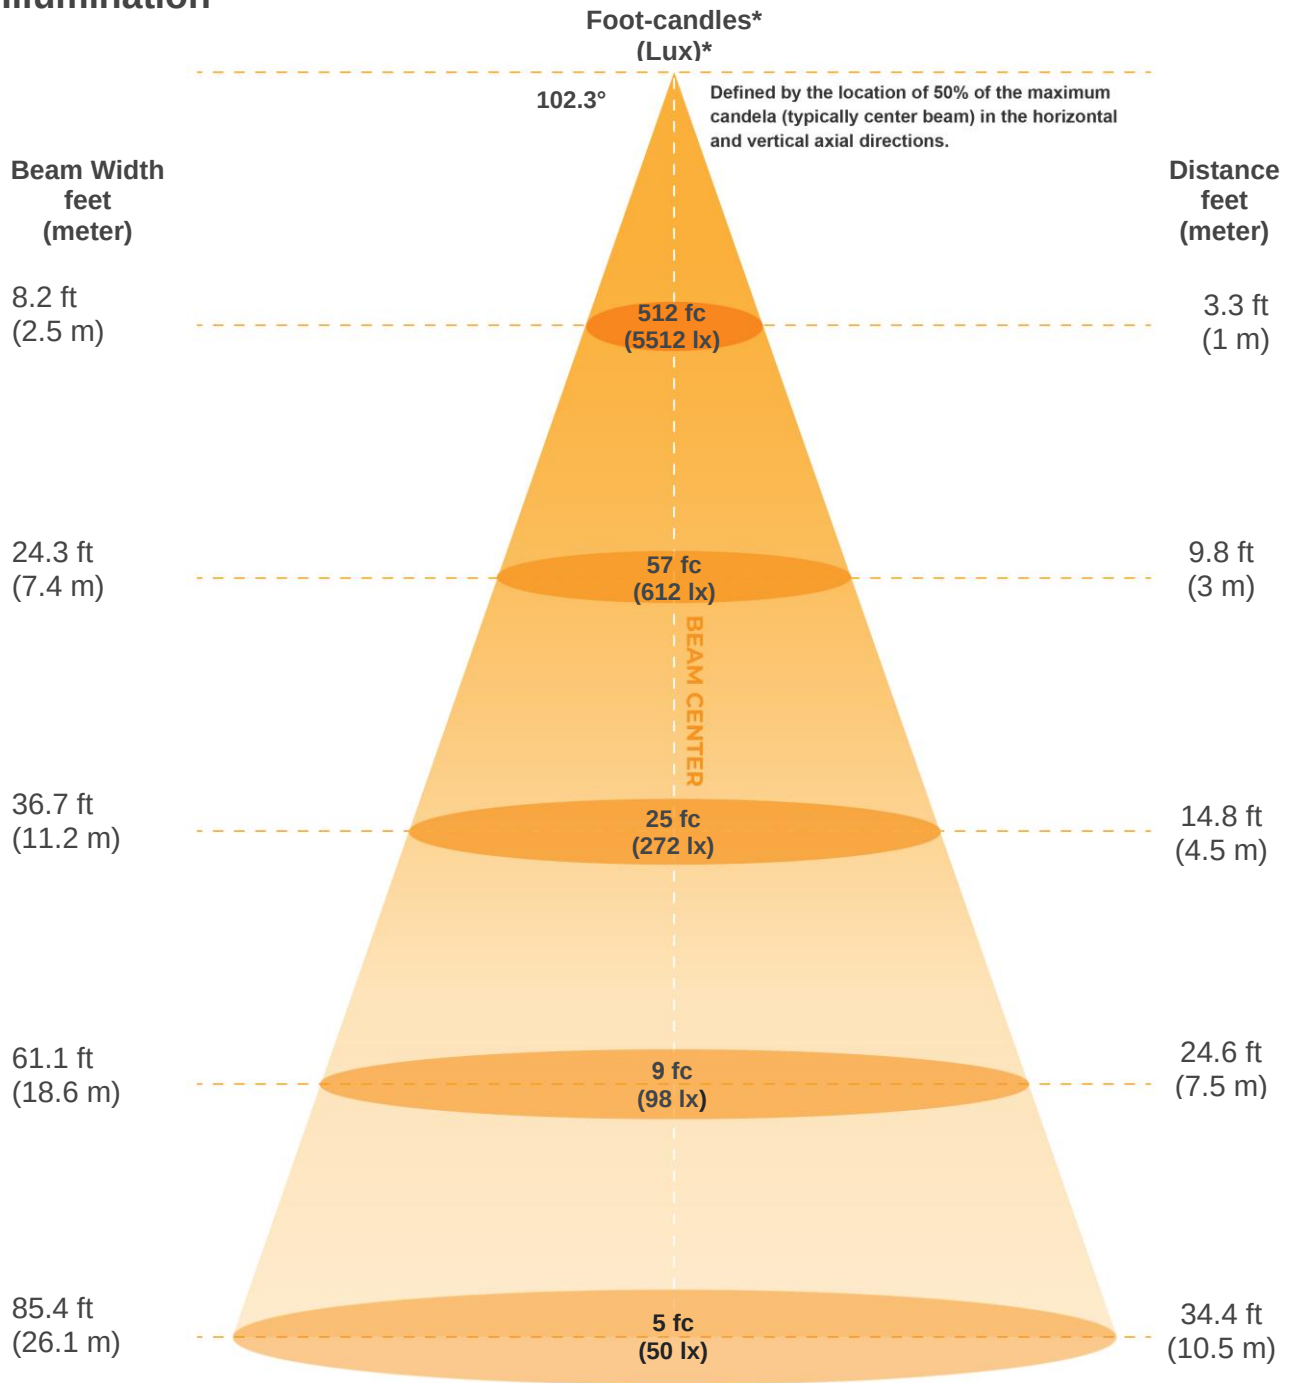

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
5512lx	1378lx	612lx	345lx	220lx	153lx	112lx	86lx	68lx	55lx	46lx	38lx	33lx	28lx	24lx	22lx	19lx	17lx	15lx	14lx
512.1fc	128fcd	56.9fcd	32fcd	20.5fcd	14.2fcd	10.5fcd	8fcd	6.3fcd	5.1fcd	4.2fcd	3.6fcd	3fcd	2.6fcd	2.3fcd	2fcd	1.8fcd	1.6fcd	1.4fcd	1.3fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102.3°	150°	166.7°	84.3%	60.1%



ISO Diagrams

ISO candela diagram

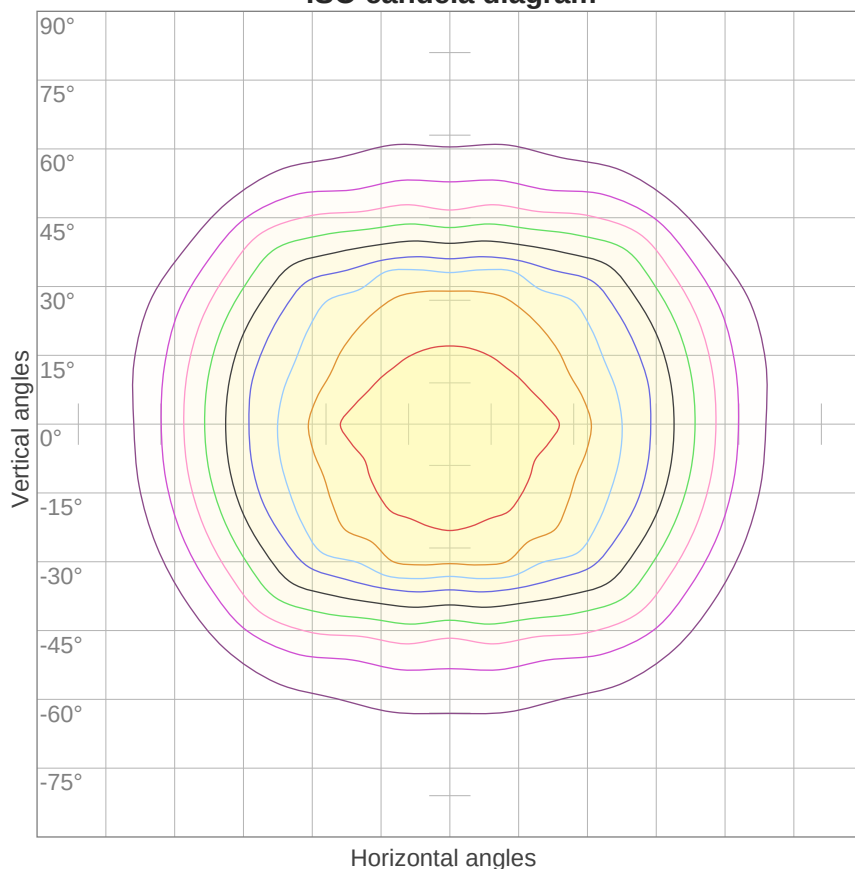


10%	551 cd
20%	1102 cd
30%	1654 cd
40%	2205 cd
50%	2756 cd
60%	3307 cd
70%	3858 cd
80%	4410 cd
90%	4961 cd

Conditions:

Number of c-planes: 16

Candela at center: 5512 cd

ISO lux diagram

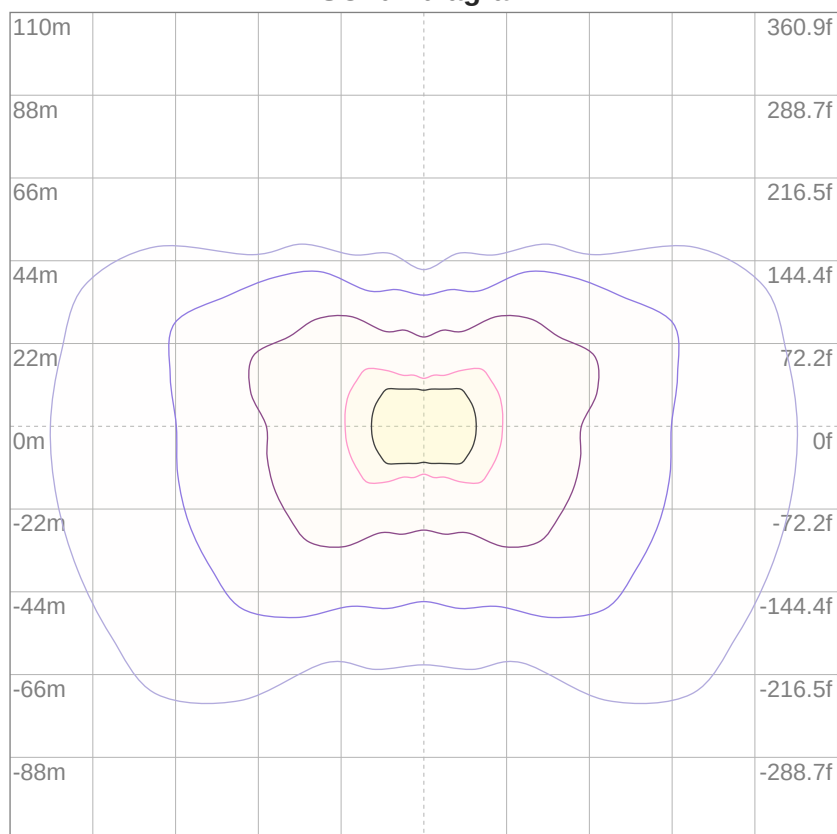

3%	1.65 lx
5%	2.76 lx
10%	5.51 lx
30%	16.5 lx
50%	27.6 lx

Conditions:

Number of c-planes: 16

Lux at center: 55.1 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	105	102	98	107	103	100	96	99	96	93	95	93	90	91	90	88	86
2	101	93	87	81	98	91	85	80	87	83	78	84	80	77	81	78	75	73
3	92	82	75	68	90	81	74	68	78	72	67	75	70	65	72	68	64	62
4	85	73	65	59	82	72	64	58	69	63	57	67	61	57	65	60	56	54
5	78	66	57	51	76	65	57	51	63	55	50	61	54	49	59	53	49	47
6	72	59	51	45	70	59	50	44	57	49	44	55	49	44	53	48	43	41
7	67	54	46	40	65	53	45	40	52	44	39	50	44	39	49	43	39	37
8	63	49	41	36	61	49	41	35	47	40	35	46	40	35	45	39	35	33
9	58	45	37	32	57	45	37	32	44	37	32	43	36	32	42	36	31	30
10	55	42	34	29	54	41	34	29	40	34	29	40	33	29	39	33	29	27

LAMPS (number of lamps)

Luminaire budgetary diagram

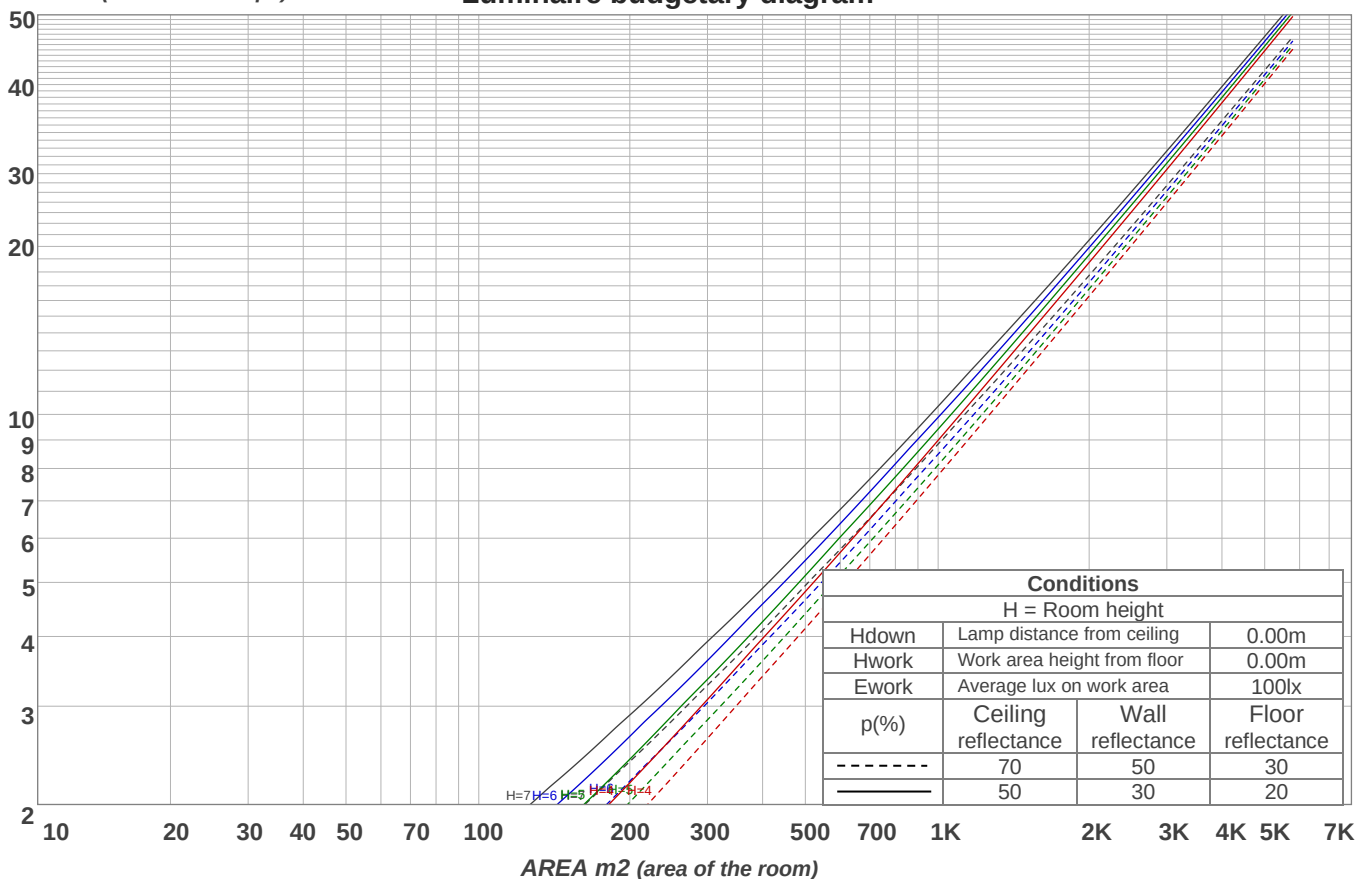

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
518 lm	1470 lm	2229 lm	2647 lm	2561 lm	2057 lm	1341 lm	636 lm	123 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
2.92 lm	3.08 lm	3.76 lm	4.64 lm	4.98 lm	4.84 lm	3.92 lm	2.63 lm	0.926 lm




Road Report

LCS table


BUG rating:	B3 U2 G2	
Forward light	Lumens	Lumens %
Low(0-30):	2107.5	15.5%
Medium(30-60):	3626.4	26.6%
High(60-80):	988.6	7.3%
Very high(80-90):	64.6	0.5%
Back light		
Low(0-30):	2107.5	15.5%
Medium(30-60):	3626.4	26.6%
High(60-80):	988.6	7.3%
Very high(80-90):	64.6	0.5%
Uplight		
Low(90-100):	3.7	0%
High(100-180):	28.8	0.2%

LCS graph

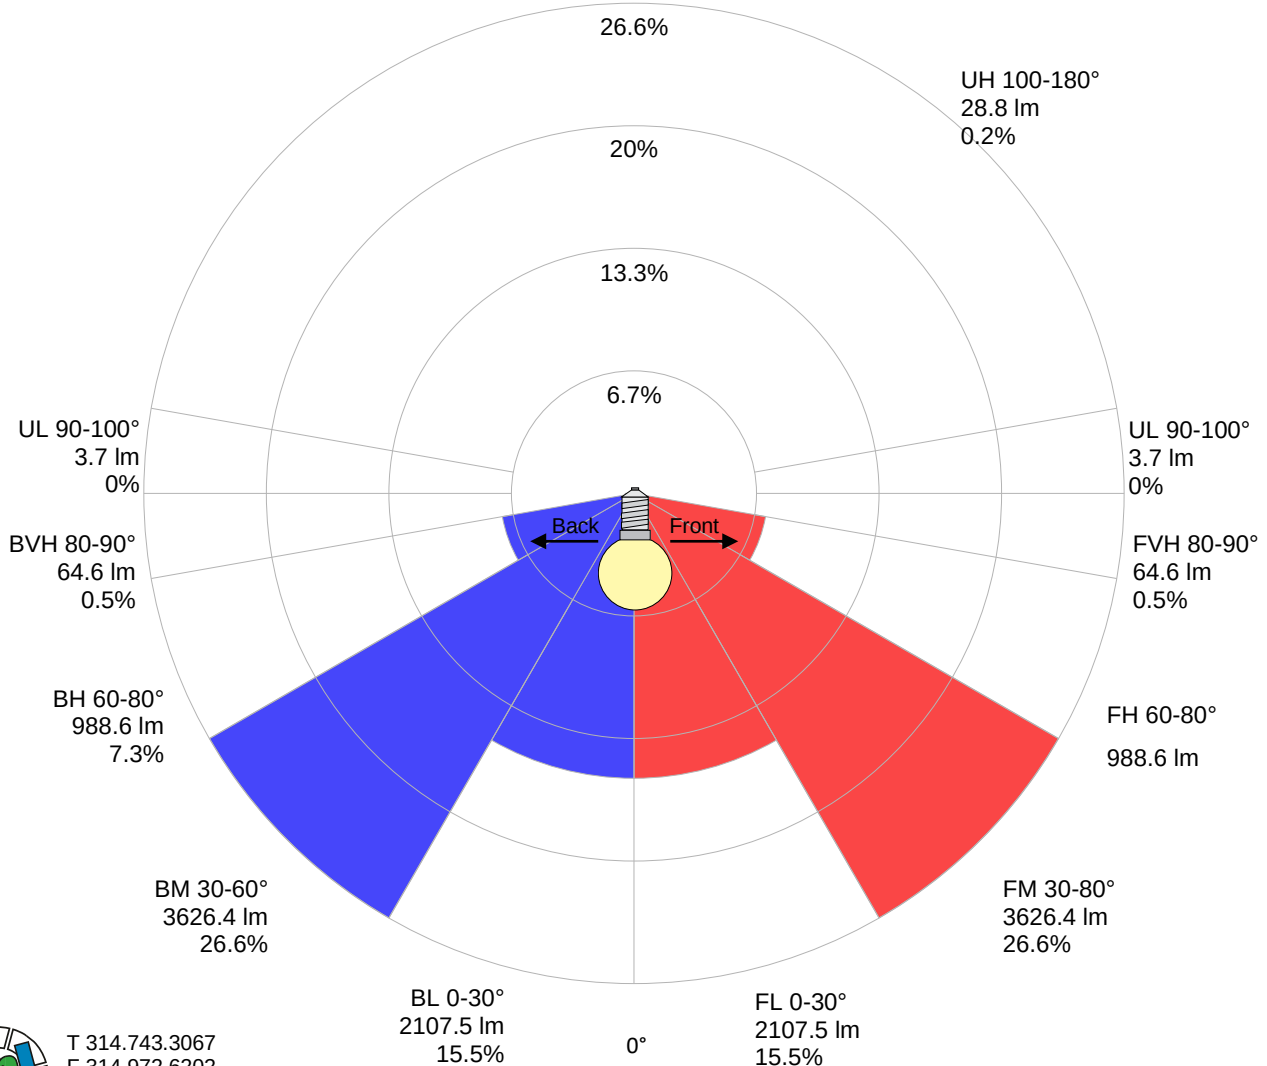

Stabilization

Warmup curve

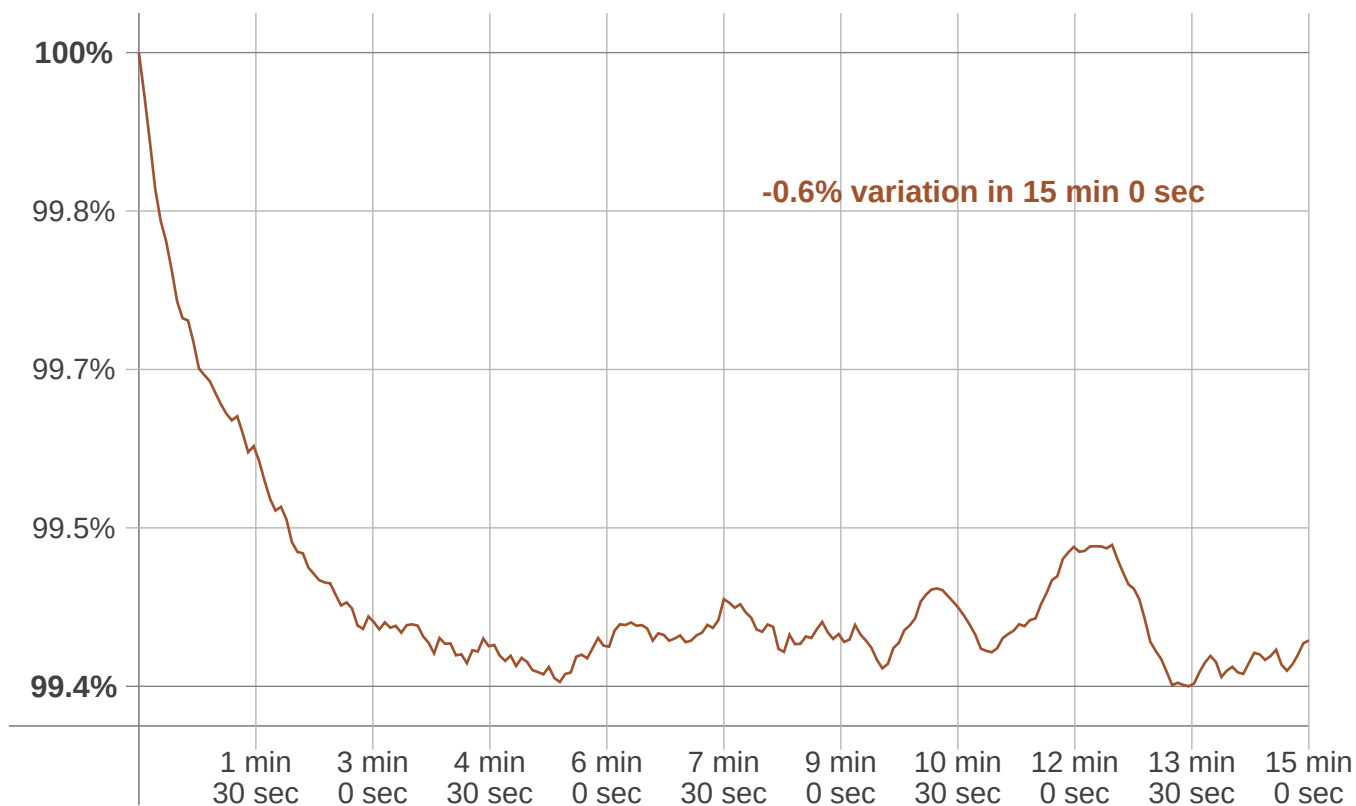

Warmup result

Warmup time:	15 min 0 sec
Warmup variation	-0.6%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5090 K	+44 K	5134 K


Output change

Output start	Output change	Output end
13674 lm	-59 lm	13615 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

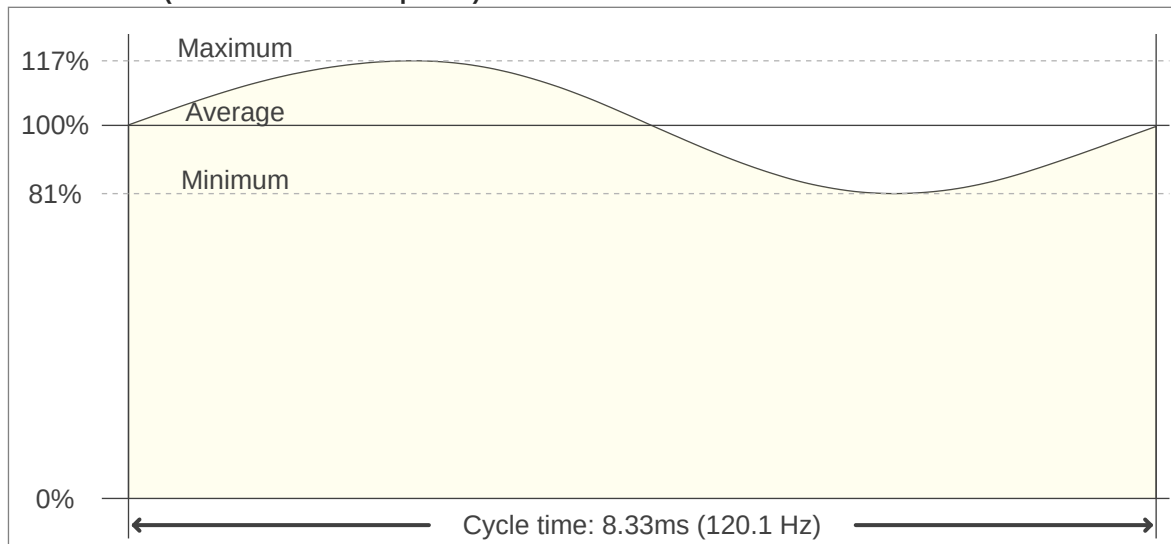

Flicker FFT (frequency scope of flicker curve)

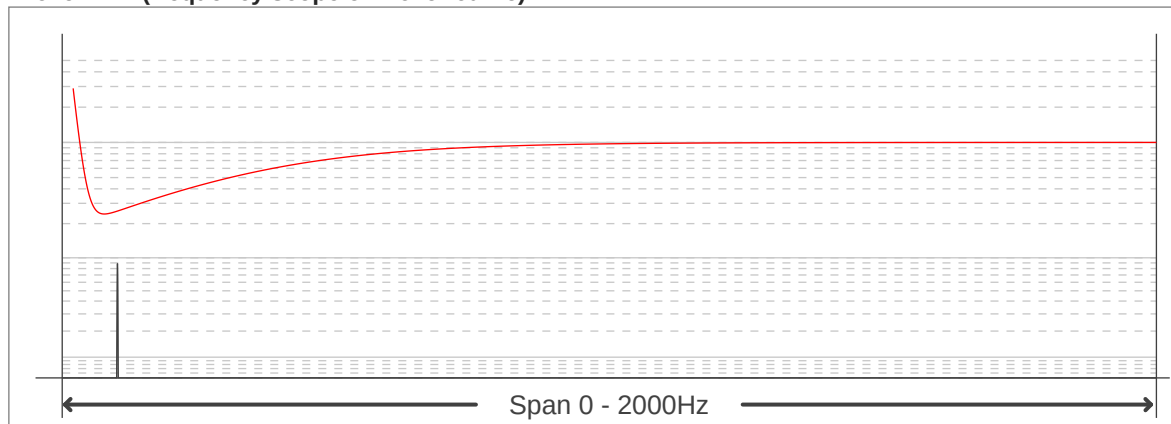

Flicker results:

Flicker frequency:	120.12 Hz
Flicker index:	0.06
Flicker percentage:	17.95 %
SVM: (Visual flicker)	0.64

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

