

Light efficiency:

131 Lumen/Watt

Output: 6720 lm

Light quality:

CRI: 73.1


Peak: 2447 cd

Color temperature:

5134 K

Power: 51.2 W

PF: 0.99

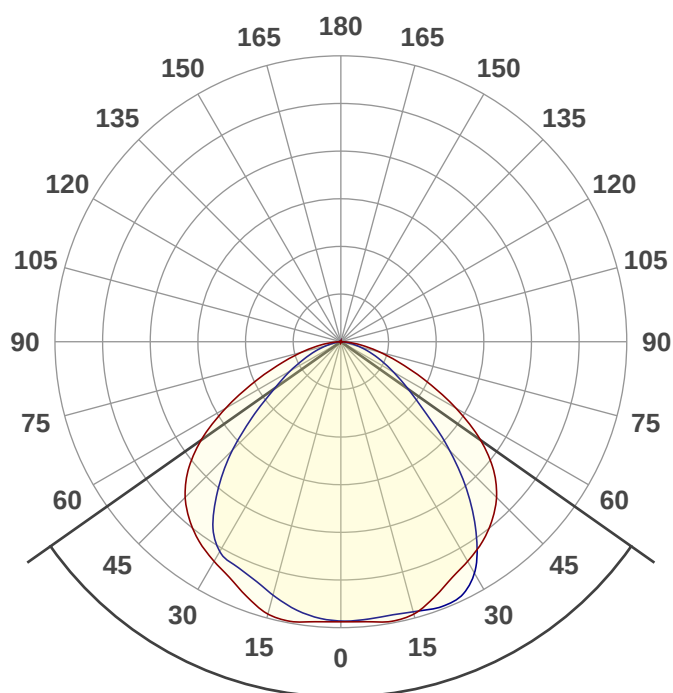

Product name:

AFL-50K50-110-x

Date and time:

10/1/2019 11:36:26 AM

Beam angle

109.7°




CIE 1931


x: 0.341

y: 0.346

Spectra

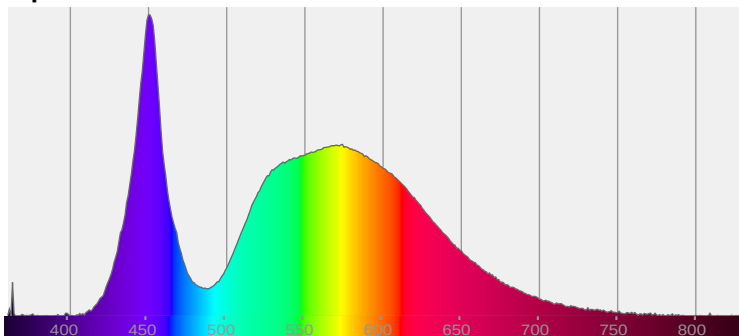

Power

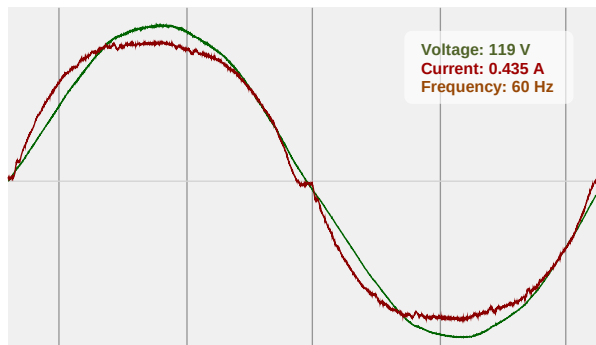



T 314.743.3067

F 314.972.6202

email: commercial-sales@superbrightleds.com



www.superbrightleds.com/

Color Specifications

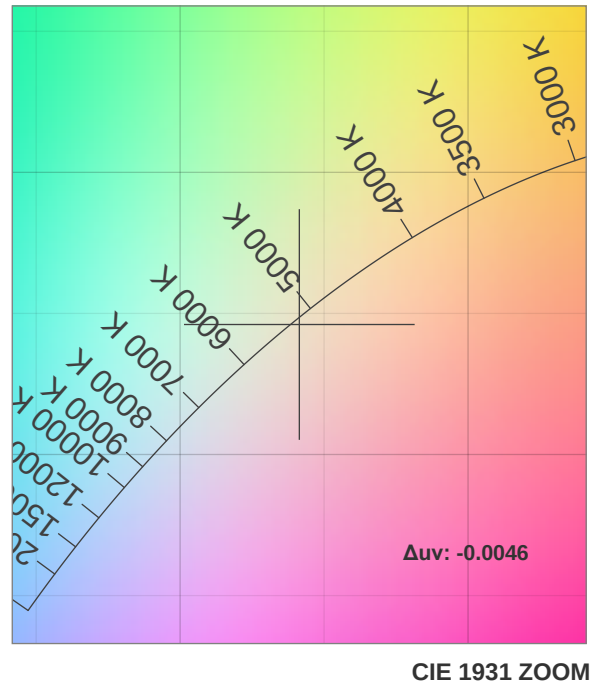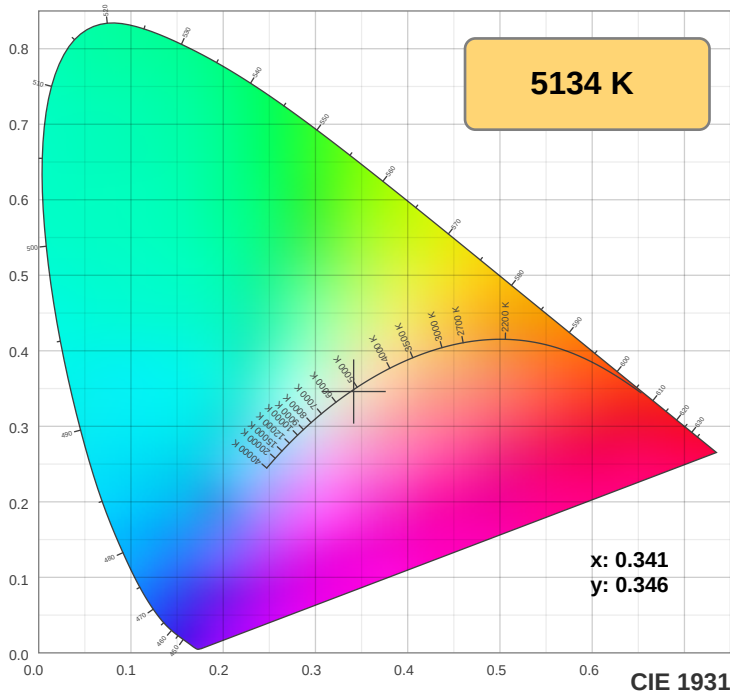

TM30: 69.9

CRI: 73.1 (R1-R8)

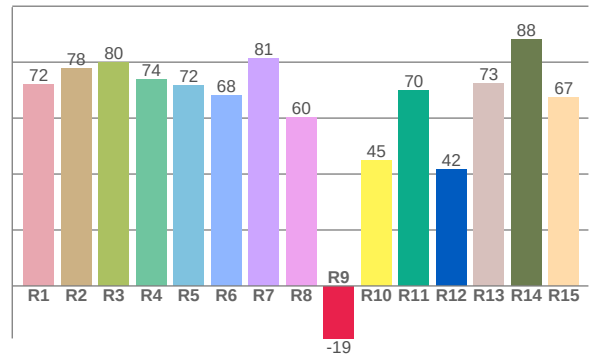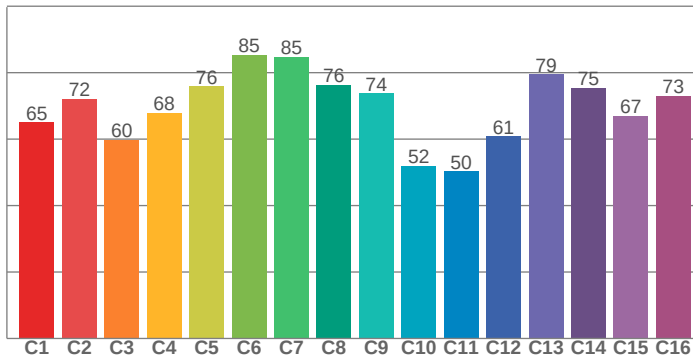

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
71.9	77.8	79.8	73.9	71.6	68.0	81.3	60.3	-18.8	45.0	70.0	41.7	72.5	88.3	67.4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
65.1	72.2	59.7	67.9	75.9	85.3	84.8	76.4	73.8	52.0	50.3	60.8	79.5	75.5	67.0	73.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79.1	92.8	58.5	53.4	65.6	70.6	75.1	84.3	88.7	70.9	64.9	66.3	69.8	60.4	67.8

CQS: 69.3

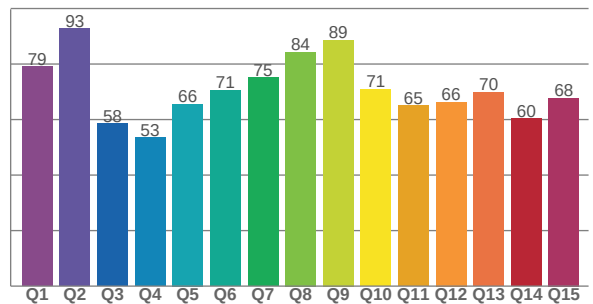

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5134 K	73.1	-18.8	69.9	94.0	69.3	0.341	0.346	0.211	0.321	-0.0046



TM30 Report







Rf 69.9

Fidelity index Rf


Rg 94.0

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	65	-17%	-2%
2	72	-12%	9%
3	60	-6%	20%
4	68	3%	18%
5	76	8%	11%
6	85	8%	-1%
7	85	-3%	-8%
8	76	-11%	-5%
9	74	-18%	9%
10	52	-13%	23%
11	50	-2%	29%
12	61	7%	19%
13	79	14%	4%
14	75	10%	-7%
15	67	4%	-22%
16	73	-3%	-16%

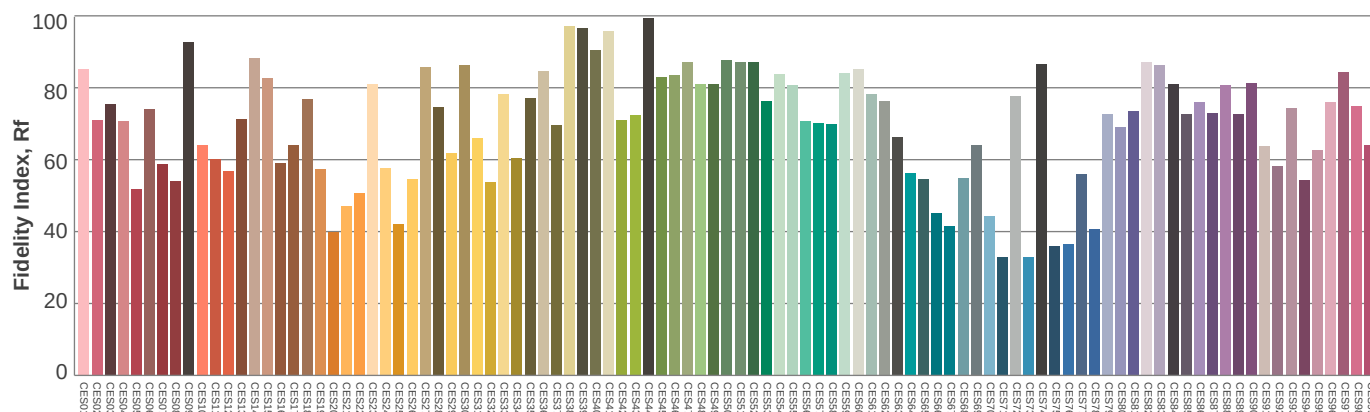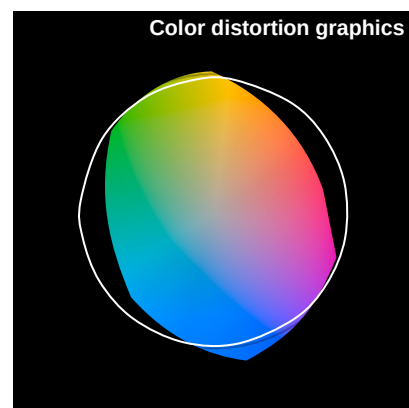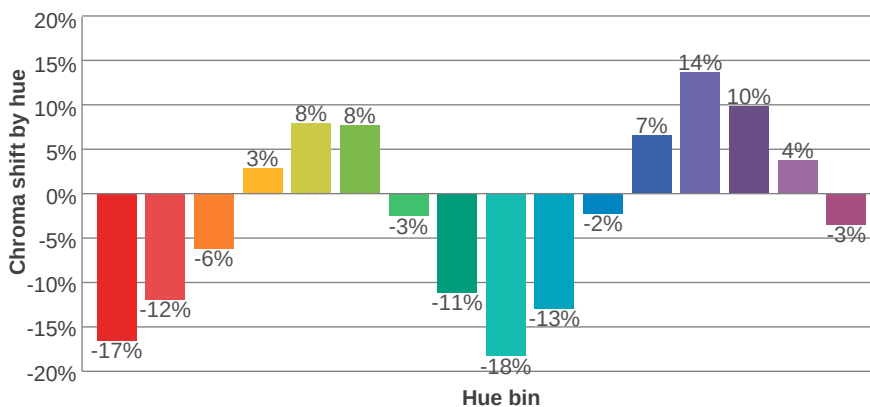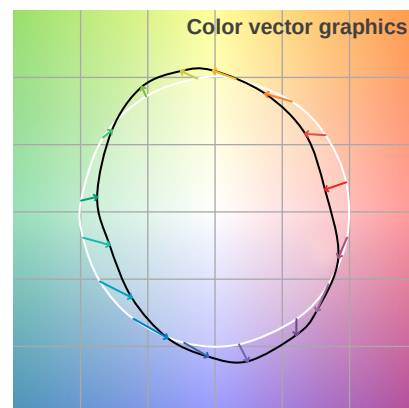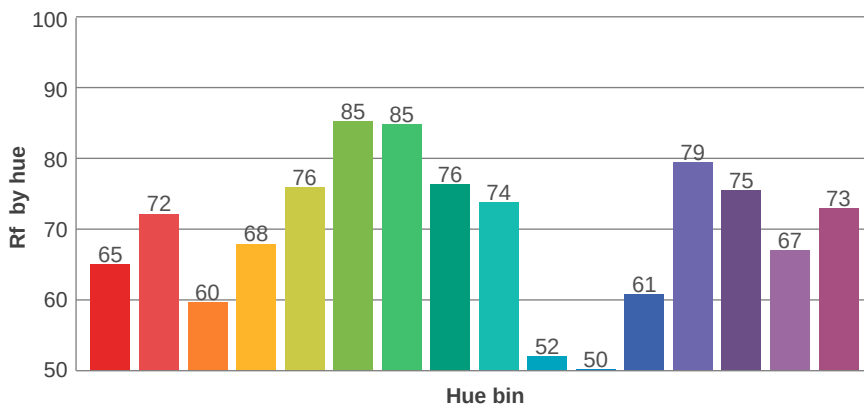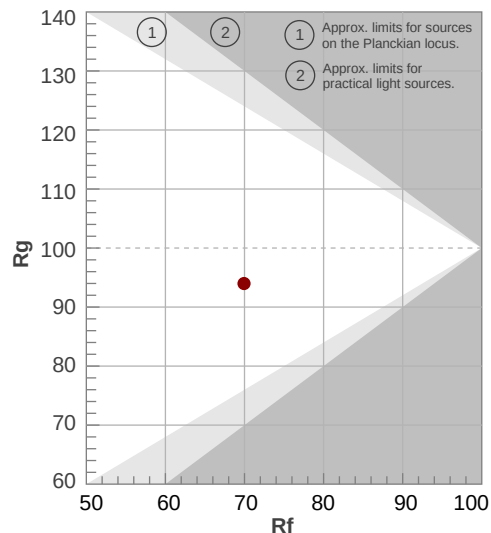

Illumination

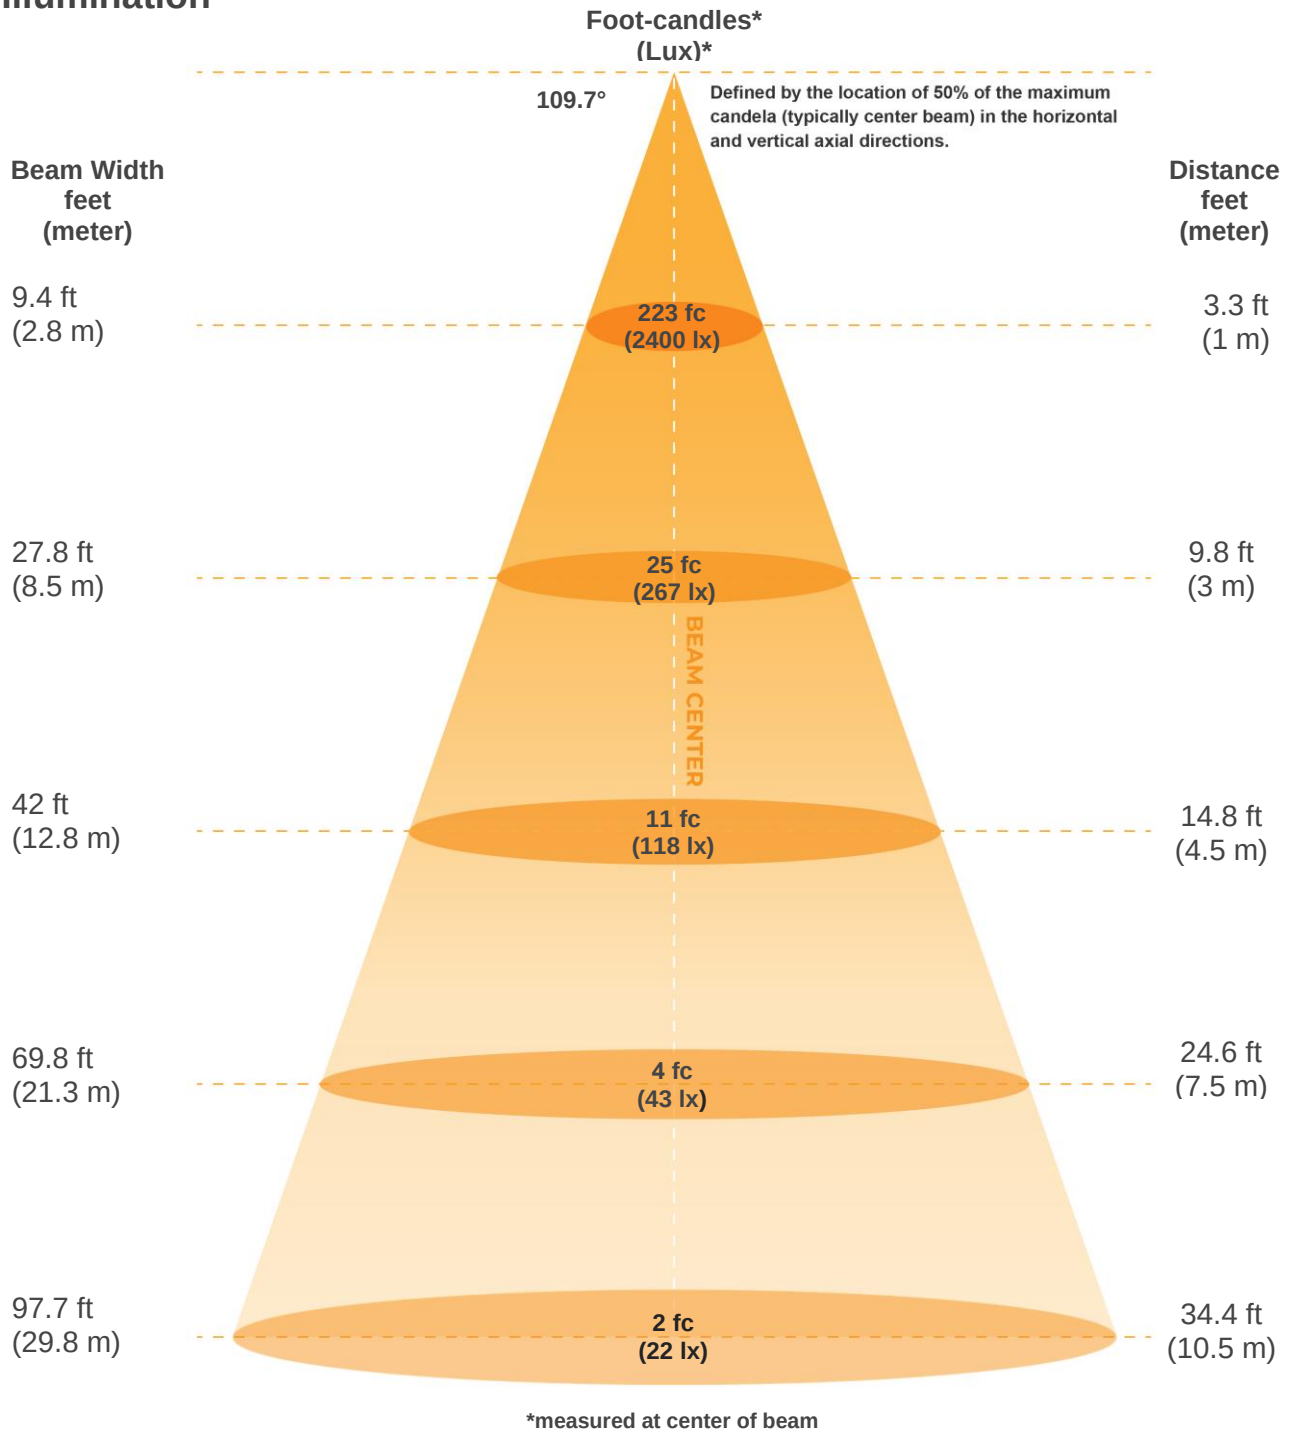

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2400lx	600lx	267lx	150lx	96lx	67lx	49lx	37lx	30lx	24lx	20lx	17lx	14lx	12lx	11lx	9lx	8lx	7lx	7lx	6lx
222.9fc	55.7fcd	24.8fcd	13.9fcd	8.9fcd	6.2fcd	4.5fcd	3.5fcd	2.8fcd	2.2fcd	1.8fcd	1.5fcd	1.3fcd	1.1fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.6fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
109.7°	152.4°	168°	83.8%	58.4%



ISO Diagrams

ISO candela diagram

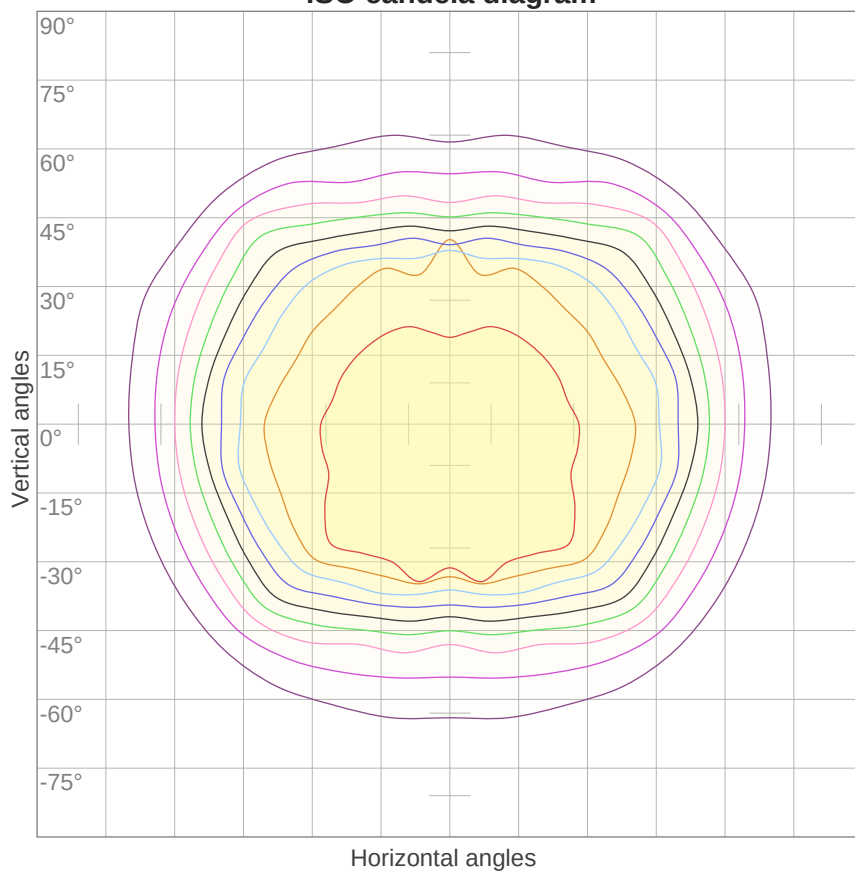


10%	240 cd
20%	480 cd
30%	720 cd
40%	960 cd
50%	1200 cd
60%	1440 cd
70%	1680 cd
80%	1920 cd
90%	2160 cd

Conditions:

Number of c-planes: 16

Candela at center: 2400 cd

ISO lux diagram

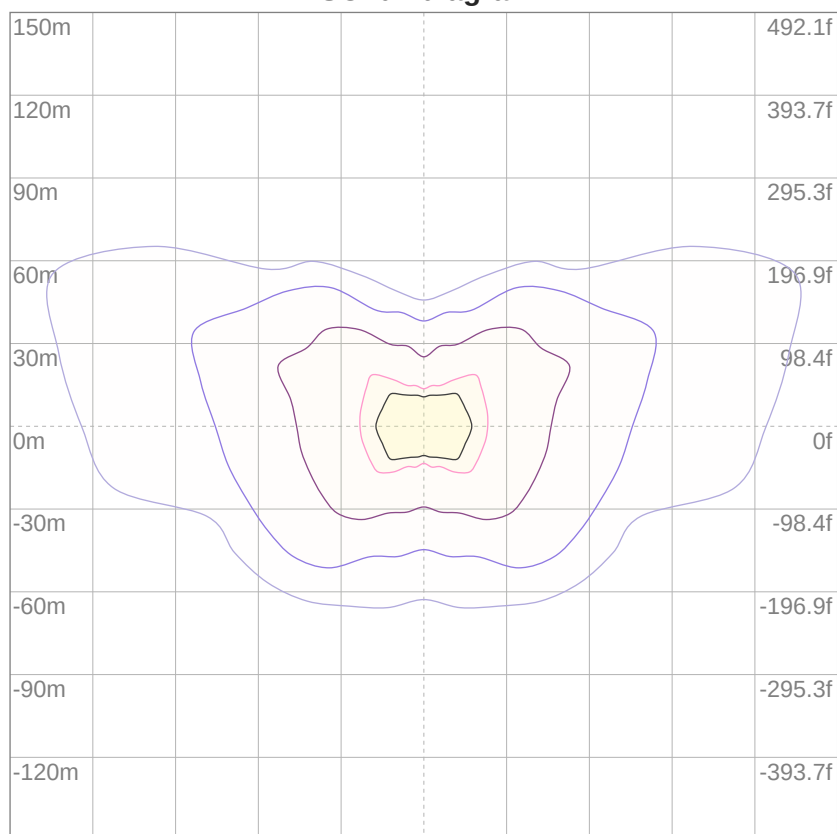

3%	0.720 lx
5%	1.20 lx
10%	2.40 lx
30%	7.20 lx
50%	12.0 lx

Conditions:

Number of c-planes: 16

Lux at center: 24.0 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	105	101	98	107	103	99	96	99	96	93	95	92	90	91	89	87	85
2	100	92	86	81	98	91	85	80	87	82	78	84	80	76	81	77	74	72
3	92	82	74	68	89	80	73	67	77	71	66	74	69	65	72	67	64	61
4	84	73	64	58	82	71	63	57	69	62	56	66	60	56	64	59	55	53
5	77	65	56	50	75	64	56	50	62	54	49	60	53	48	58	52	48	46
6	72	59	50	44	70	58	49	43	56	48	43	54	48	43	53	47	42	40
7	66	53	45	39	65	52	44	38	51	43	38	49	43	38	48	42	37	36
8	62	48	40	34	60	48	40	34	46	39	34	45	39	34	44	38	34	32
9	58	44	36	31	56	44	36	31	43	36	31	42	35	30	41	35	30	28
10	54	41	33	28	53	40	33	28	39	33	28	39	32	28	38	32	28	26

LAMPS (number of lamps)

Luminaire budgetary diagram

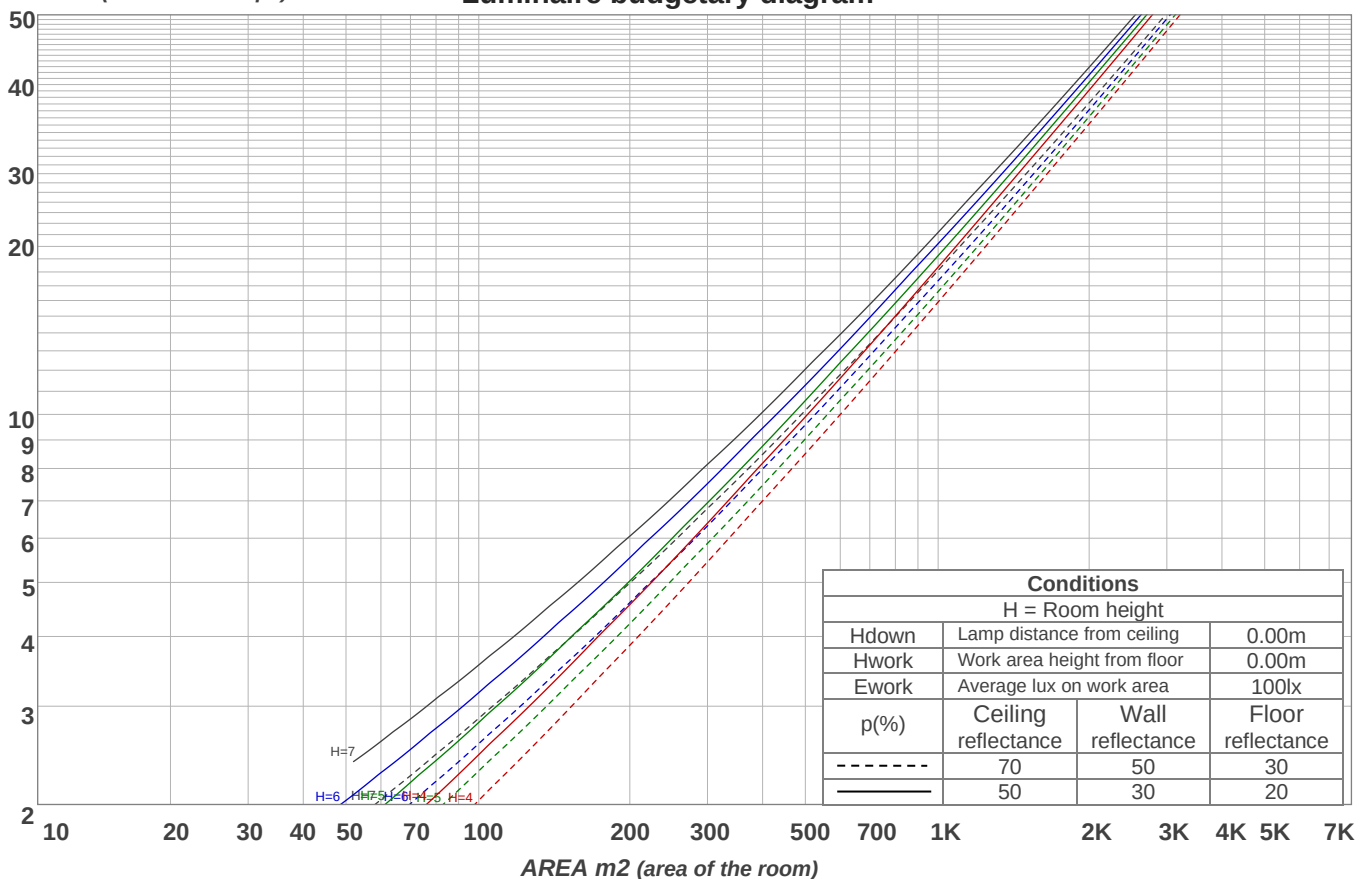

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
229 lm	672 lm	1049 lm	1304 lm	1313 lm	1063 lm	687 lm	322 lm	66.3 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
1.95 lm	1.73 lm	1.98 lm	2.13 lm	2.16 lm	2.06 lm	1.67 lm	1.09 lm	0.388 lm




Road Report

LCS table


BUG rating:	B2 U2 G2	
Forward light	Lumens	Lumens %
Low(0-30):	974.5	14.5%
Medium(30-60):	1836.7	27.3%
High(60-80):	504.7	7.5%
Very high(80-90):	34.3	0.5%
Back light		
Low(0-30):	974.5	14.5%
Medium(30-60):	1836.7	27.3%
High(60-80):	504.7	7.5%
Very high(80-90):	34.3	0.5%
Uplight		
Low(90-100):	2.3	0%
High(100-180):	13.2	0.2%

LCS graph

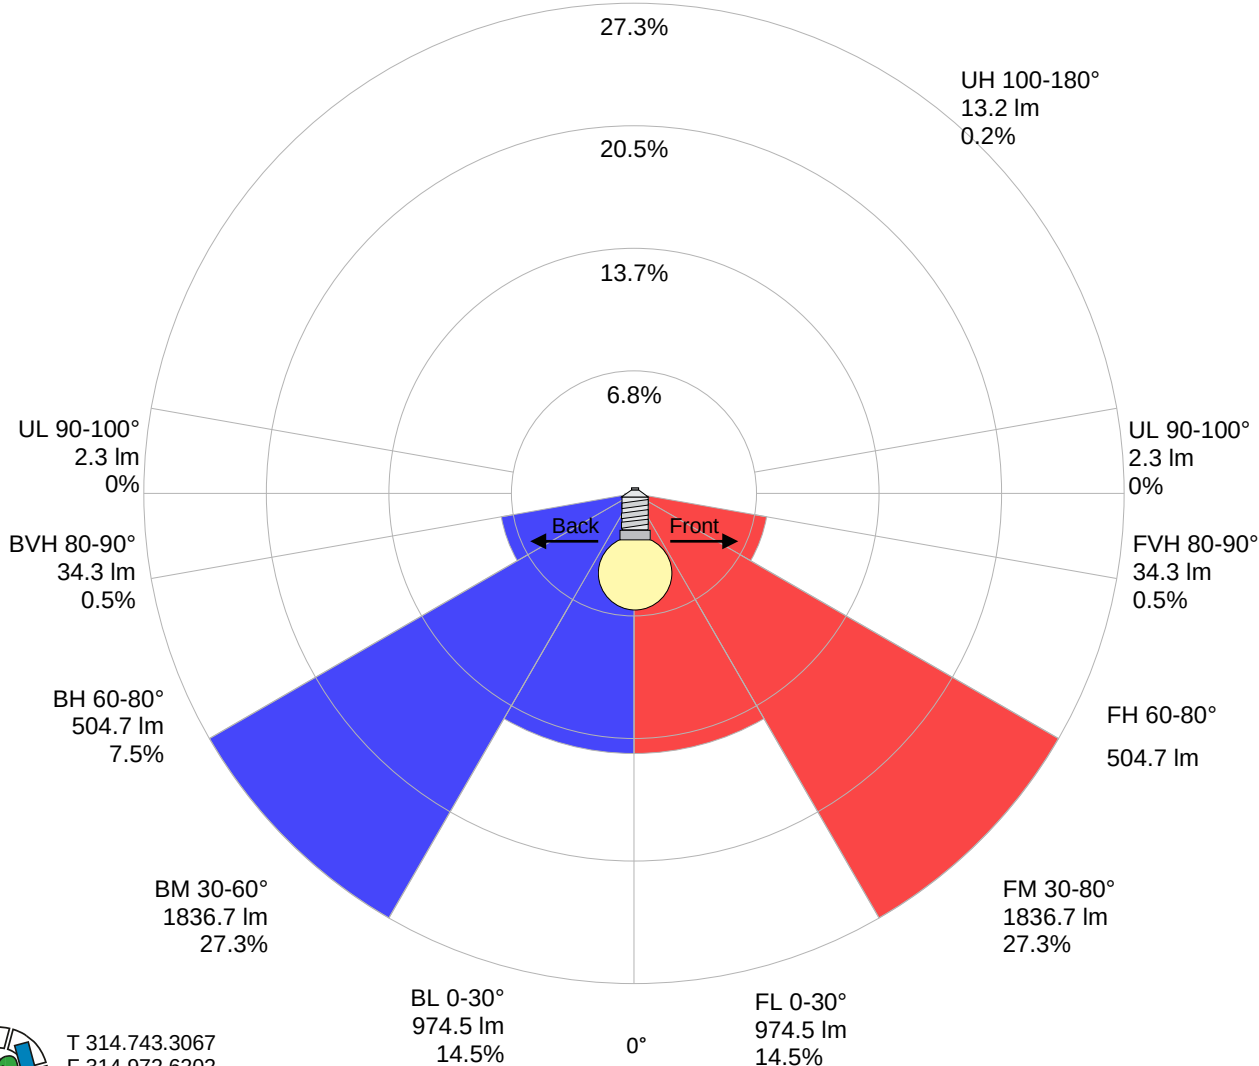

Stabilization

Warmup curve

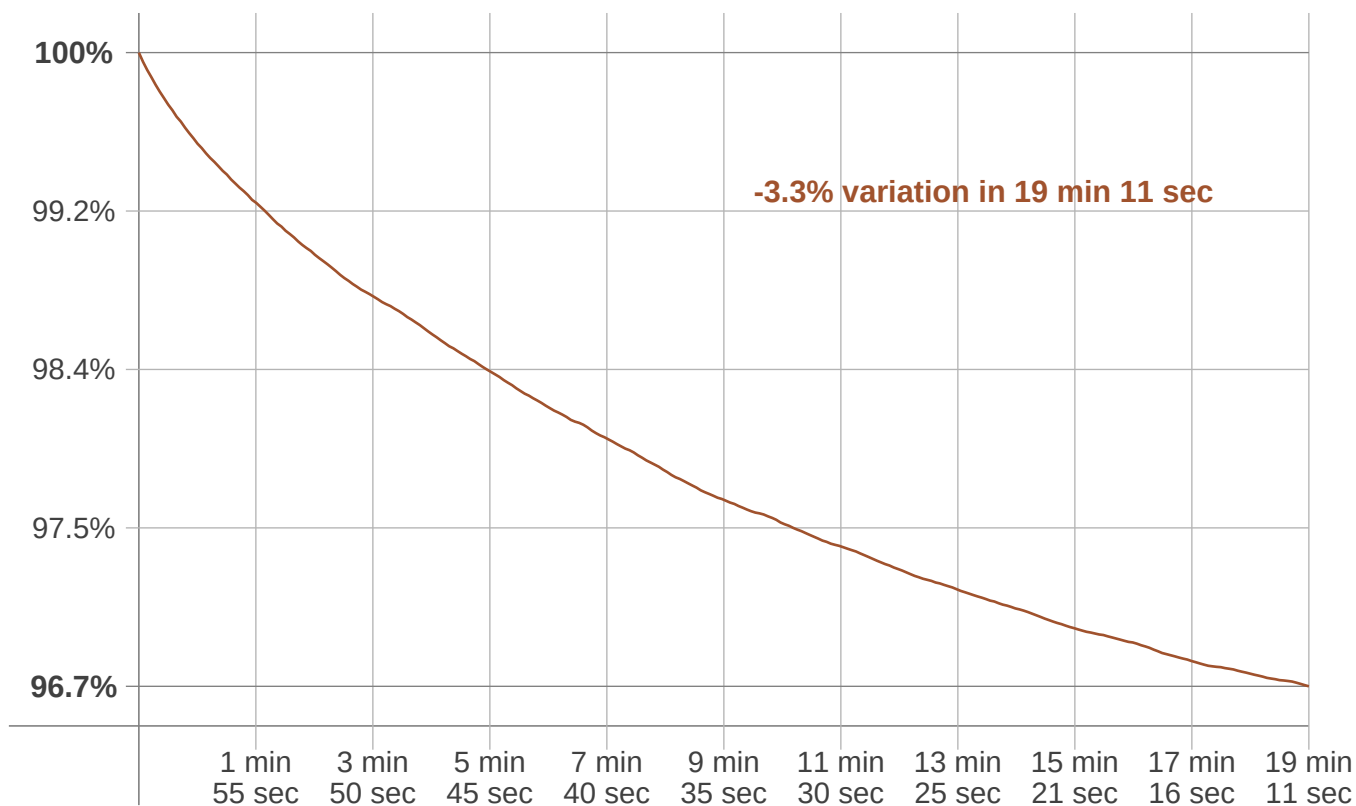

Warmup result

Warmup time:	19 min 11 sec
Warmup variation	-3.3%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5087 K	+47 K	5134 K


Output change

Output start	Output change	Output end
6939 lm	-219 lm	6720 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

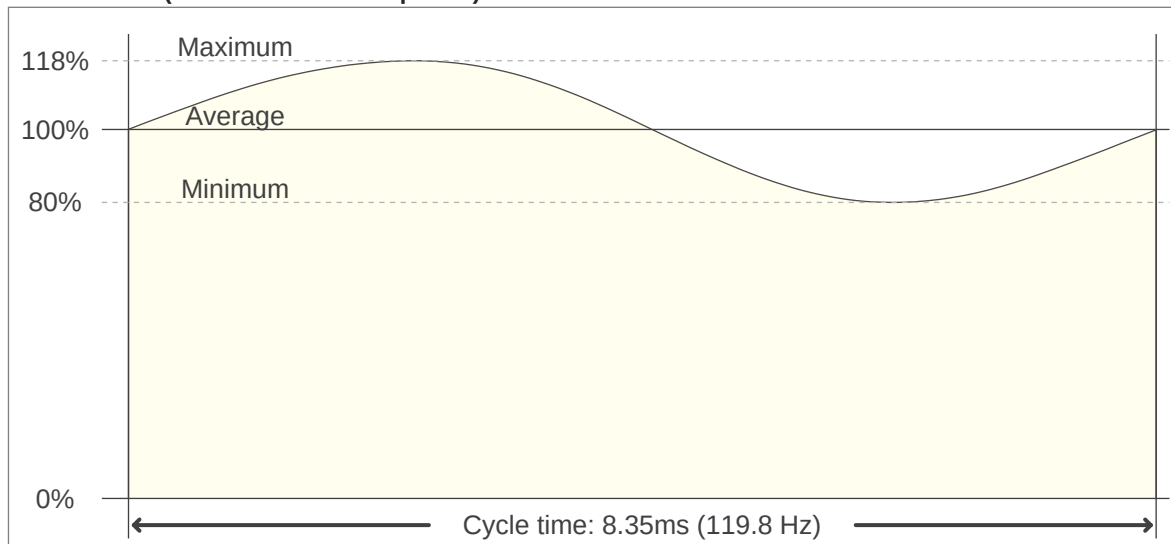

Flicker FFT (frequency scope of flicker curve)

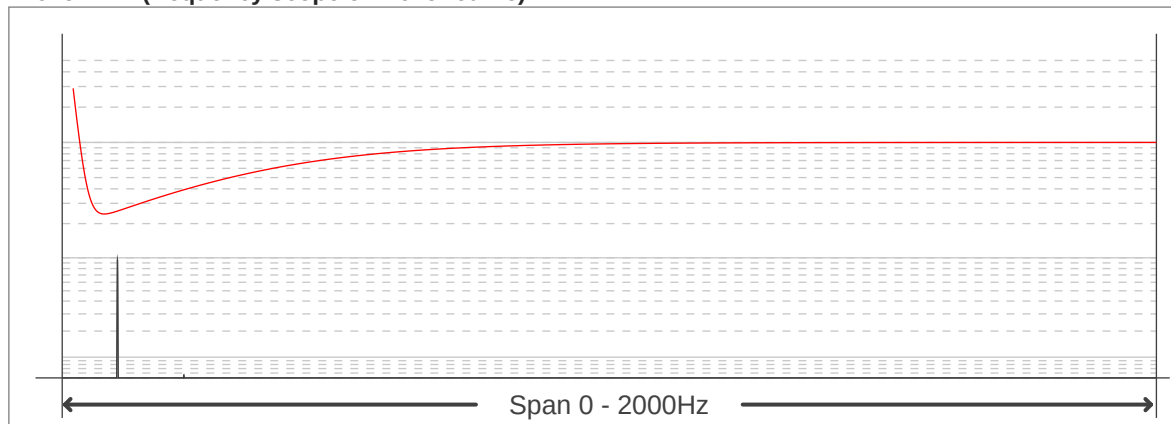

Flicker results:

Flicker frequency:	119.76 Hz
Flicker index:	0.06
Flicker percentage:	19.52 %
SVM: (Visual flicker)	0.69

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

