

Light efficiency:

Infinity Lumen/Watt

Output: 37961 lm

Light quality:

CRI: 81.9

Peak: 17380 cd

Color temperature:


5230 K

Product name:

ALD-50K30W-C-BRC3 Type II-M

Date and time:

4/17/2019 1:52:11 PM

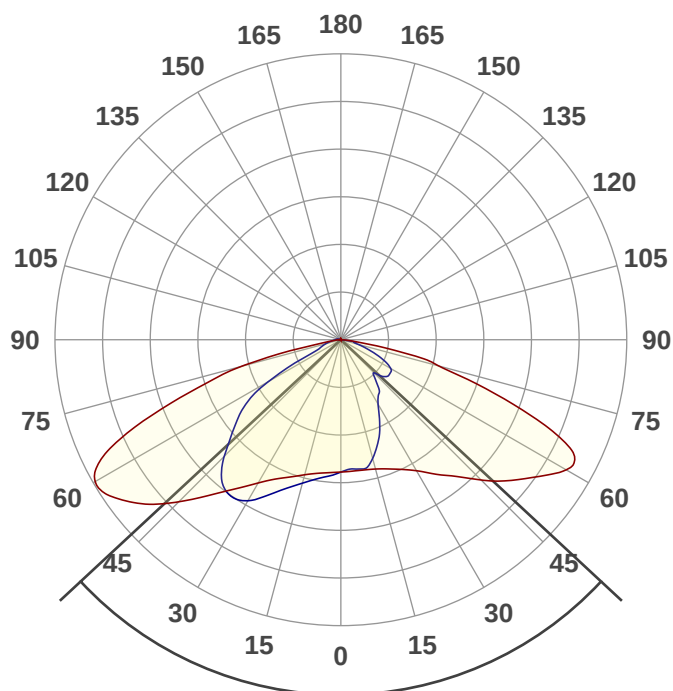

Beam angle

94.2°




CIE 1931


x: 0.339

y: 0.346

Spectra

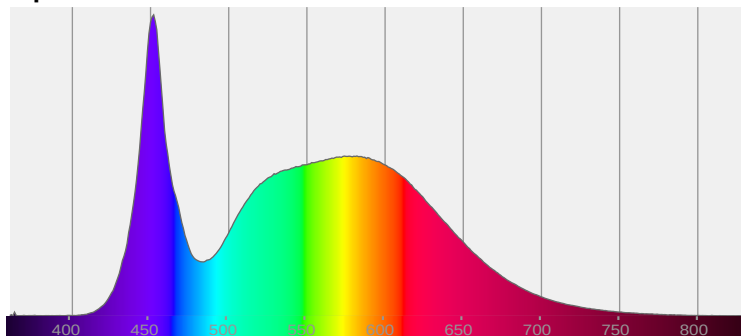

Power

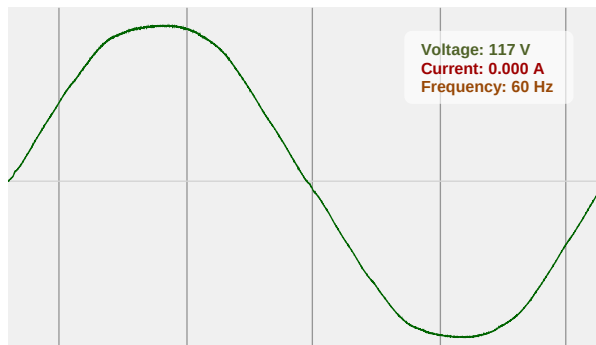



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

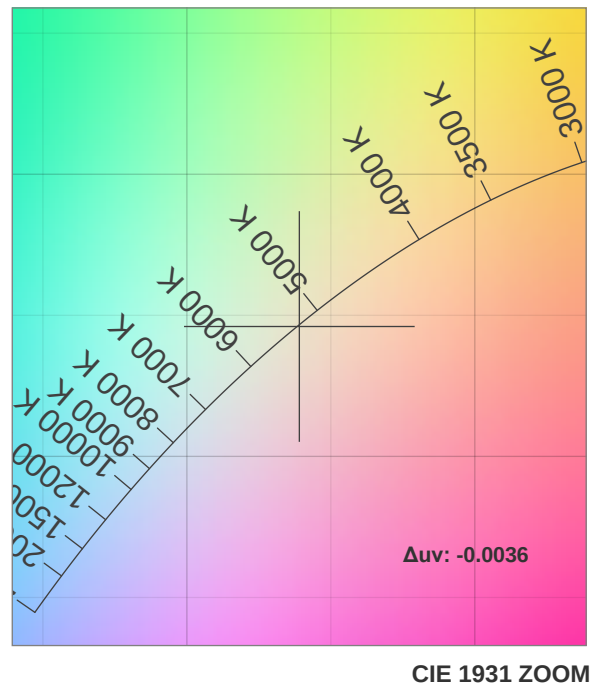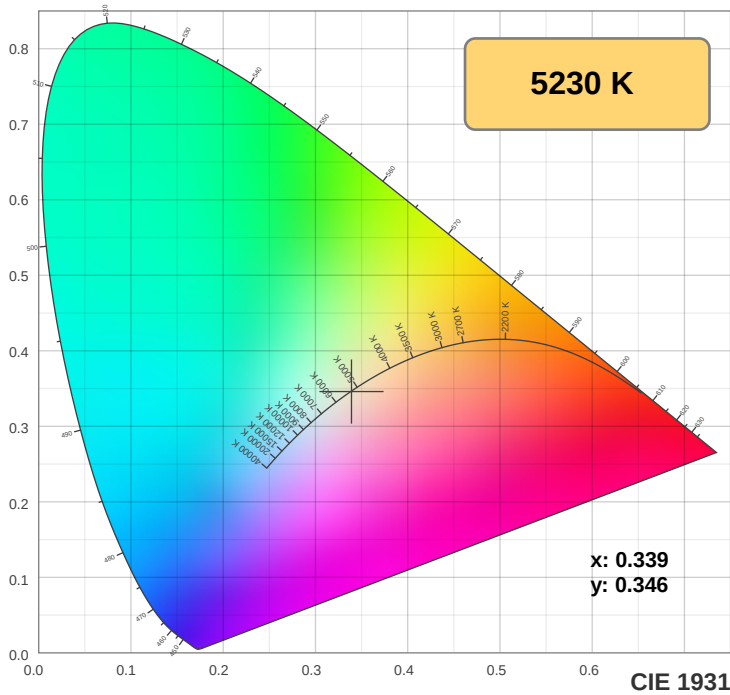

TM30: 79.3

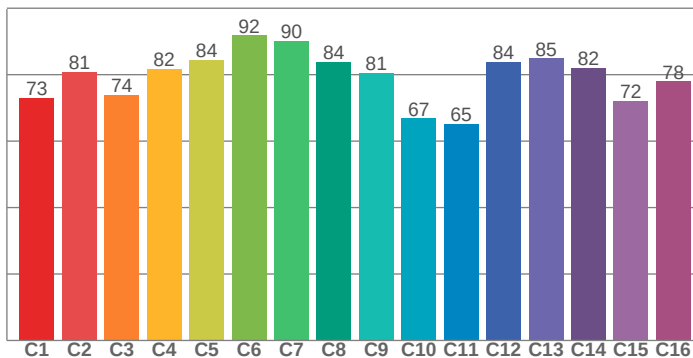

CRI: 81.9 (R1-R8)

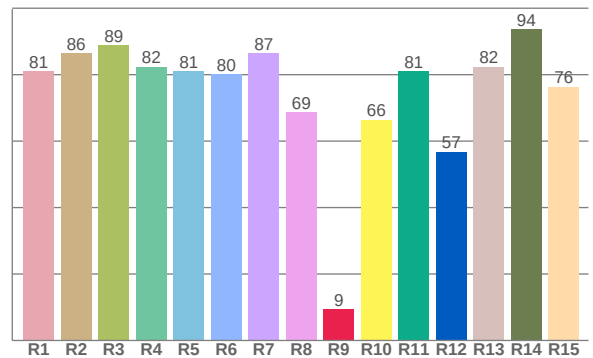

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81.1	86.5	88.8	82.4	81.1	80.1	86.5	68.8	9.5	66.4	81.1	56.8	82.4	93.7	76.4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
73.0	80.8	73.9	81.8	84.4	91.9	90.1	83.8	80.6	66.9	65.2	83.9	85.0	82.0	72.1	78.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
83.8	96.6	70.9	67.5	76.3	80.5	83.9	88.7	93.9	81.5	77.2	77.1	78.7	70.0	75.2

CQS: 78.6

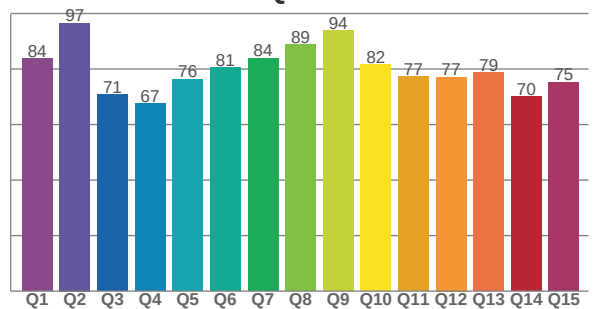

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5230 K	81.9	9.5	79.3	95.5	78.6	0.339	0.346	0.209	0.321	-0.0036



TM30 Report







Rf 79.3

Fidelity index Rf


Rg 95.5

Gamut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	73	-13%	-1%
2	81	-8%	7%
3	74	-5%	12%
4	82	0%	10%
5	84	2%	6%
6	92	3%	-1%
7	90	-4%	-4%
8	84	-8%	0%
9	81	-11%	10%
10	67	-7%	17%
11	65	1%	19%
12	84	5%	8%
13	85	10%	-2%
14	82	6%	-7%
15	72	1%	-19%
16	78	-3%	-12%

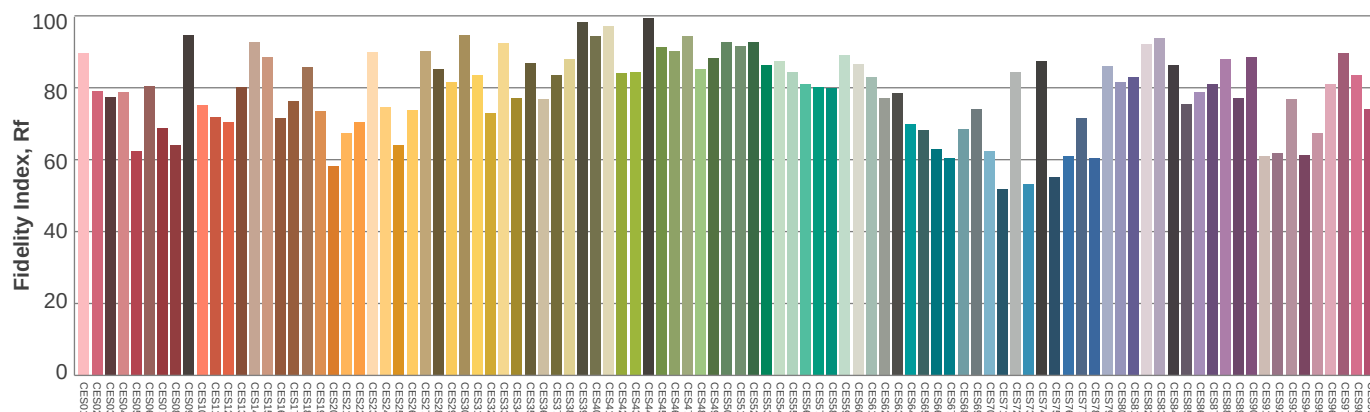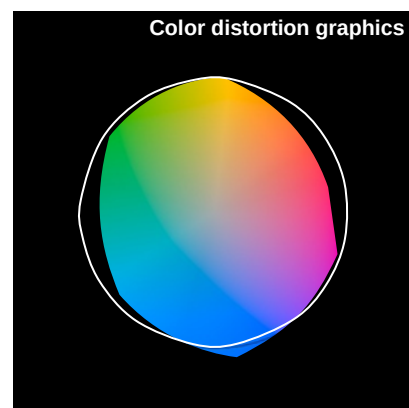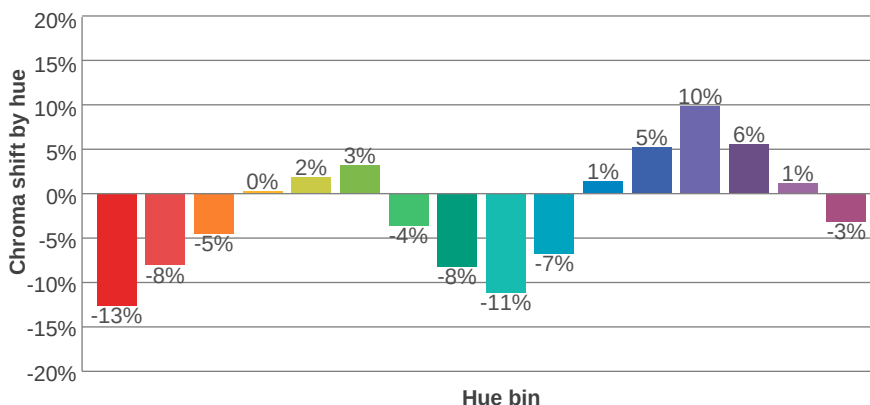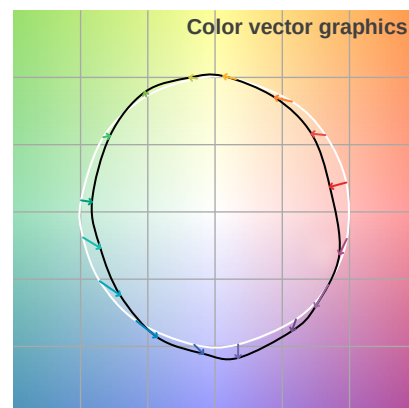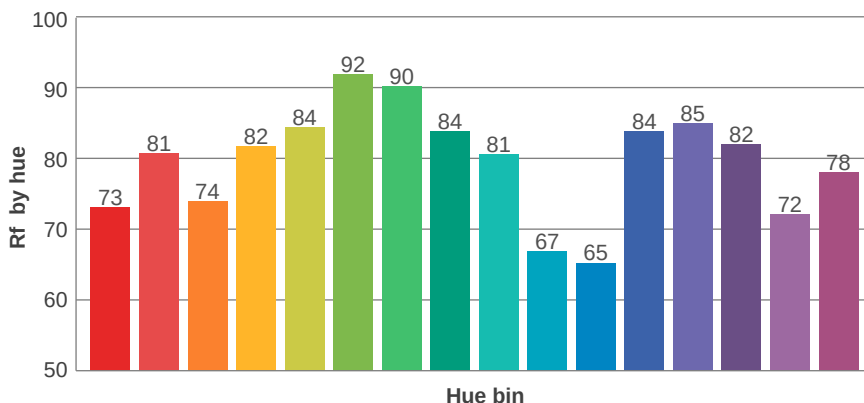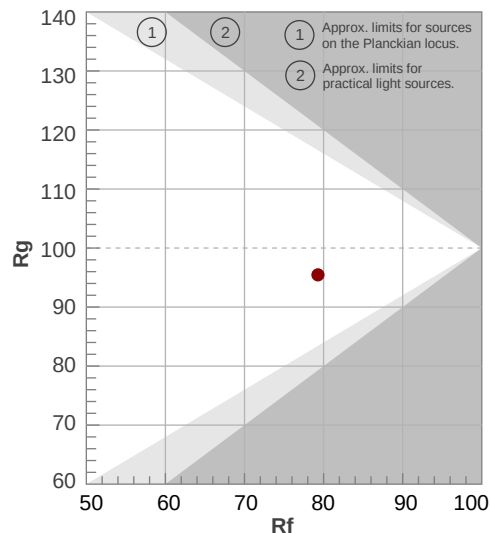

Illumination

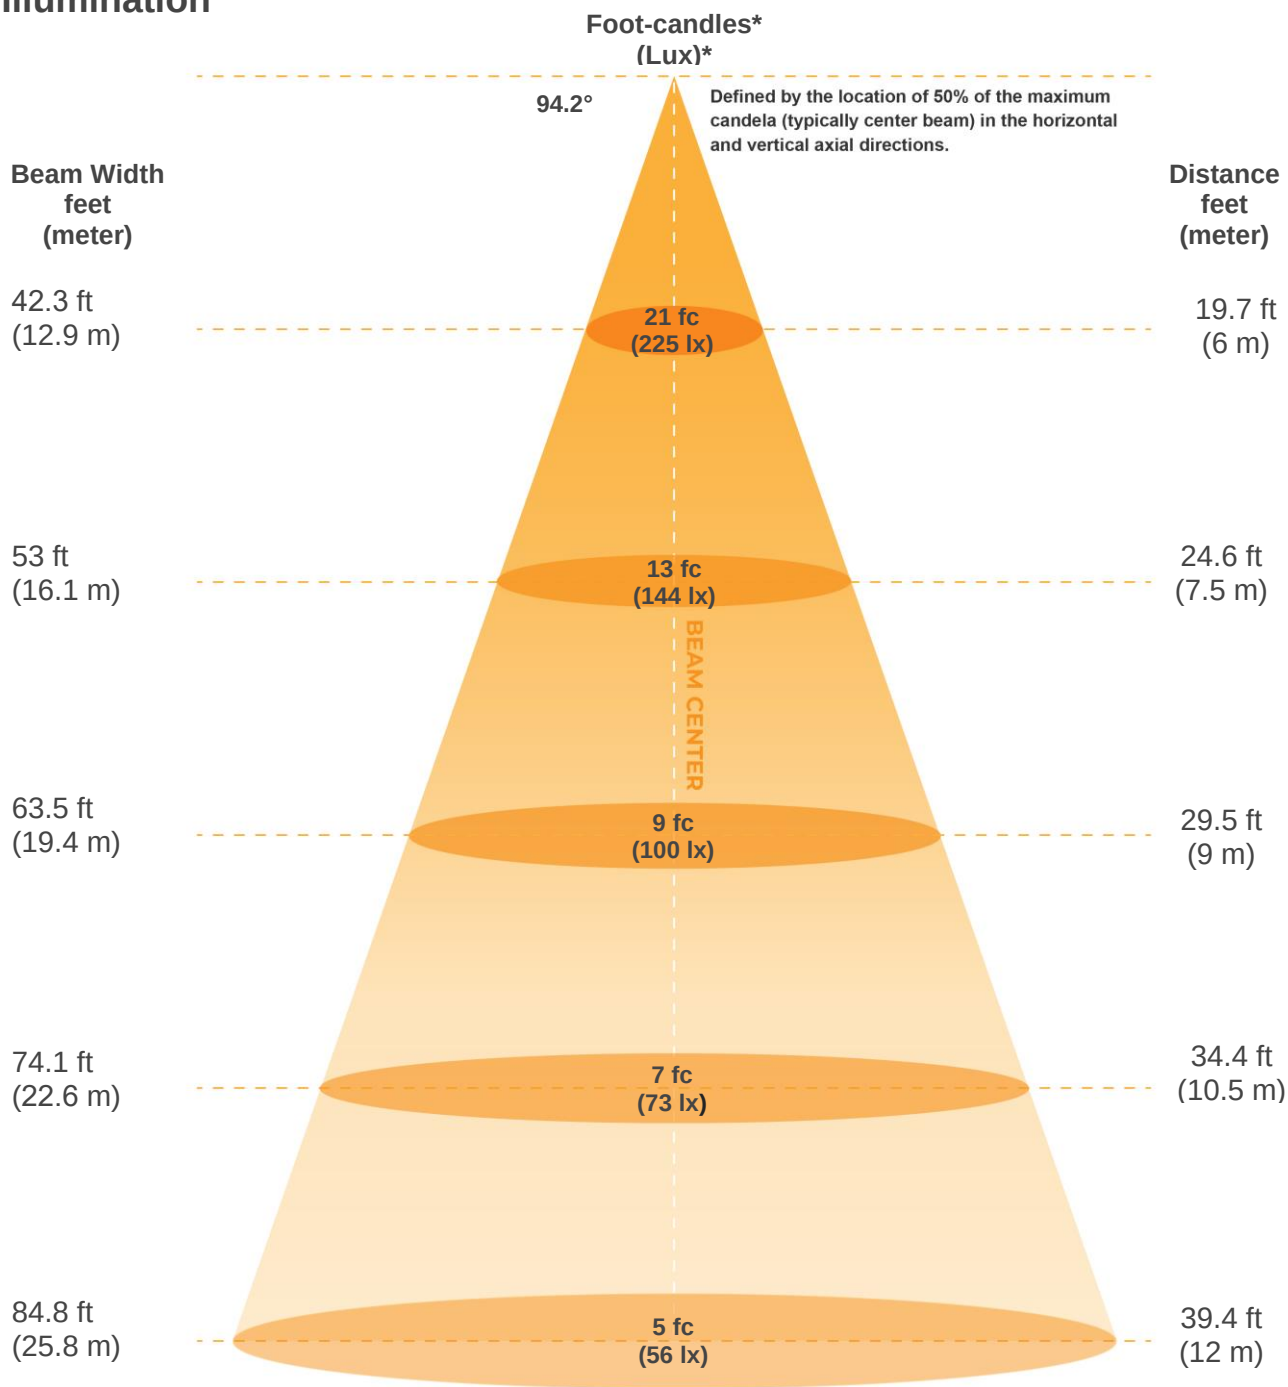

*measured at center of beam

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
8095lx	2024lx	899lx	506lx	324lx	225lx	165lx	126lx	100lx	81lx	67lx	56lx	48lx	41lx	36lx	32lx	28lx	25lx	22lx	20lx
752fcd	188fcd	83.6fcd	47fcd	30.1fcd	20.9fcd	15.3fcd	11.8fcd	9.3fcd	7.5fcd	6.2fcd	5.2fcd	4.4fcd	3.8fcd	3.3fcd	2.9fcd	2.6fcd	2.3fcd	2.1fcd	1.9fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
94.2°	152.5°	172.2°	72.2%	42.5%



ISO Diagrams

ISO candela diagram

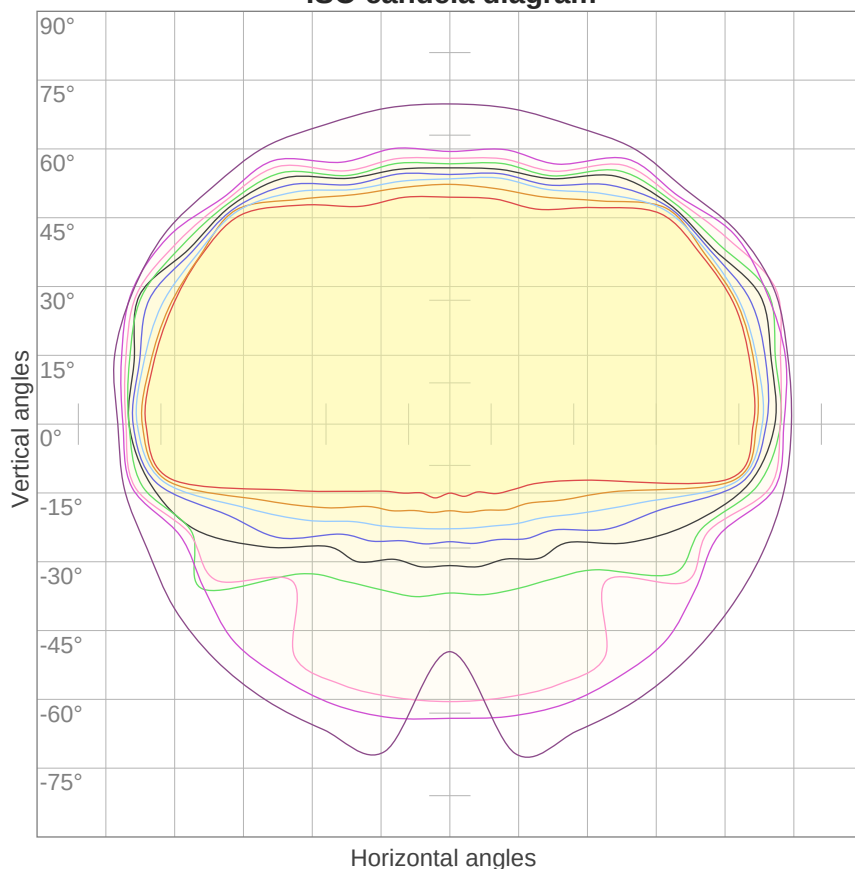


10%	809 cd
20%	1619 cd
30%	2428 cd
40%	3238 cd
50%	4047 cd
60%	4857 cd
70%	5666 cd
80%	6476 cd
90%	7285 cd

Conditions:

Number of c-planes: 16

Candela at center: 8095 cd

ISO lux diagram

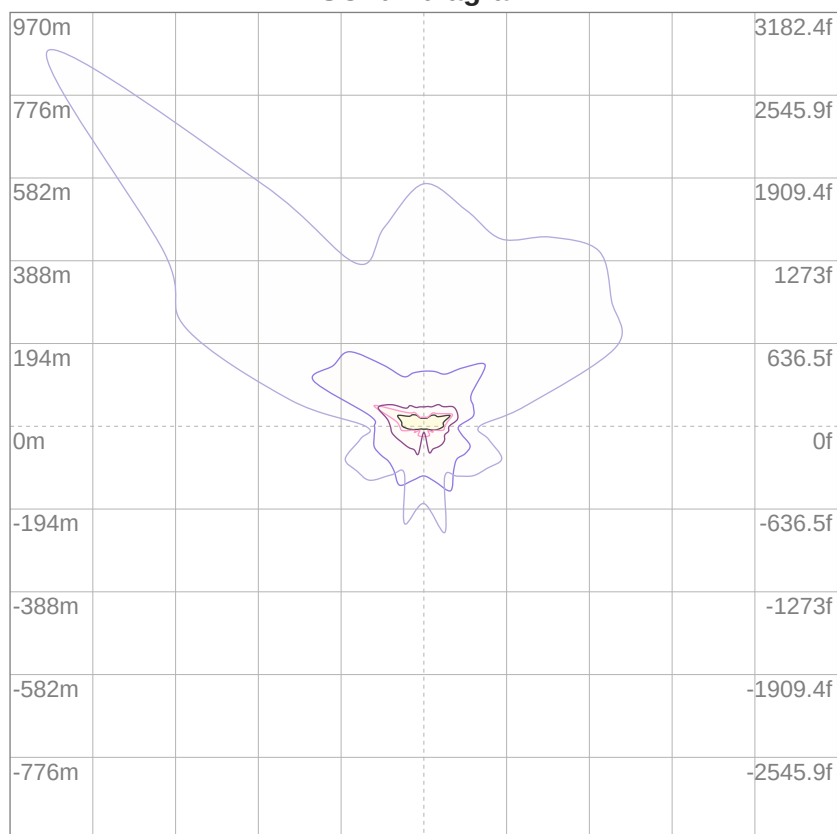

3%	2.43 lx
5%	4.05 lx
10%	8.09 lx
30%	24.3 lx
50%	40.5 lx

Conditions:

Number of c-planes: 16

Lux at center: 80.9 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	102	98	94	105	100	96	92	96	92	89	92	89	86	88	86	84	81
2	97	88	80	74	94	86	79	73	82	76	71	79	74	69	75	71	68	65
3	87	75	66	59	84	74	65	59	71	64	58	68	62	57	65	60	55	53
4	79	66	56	49	76	64	55	48	62	54	48	59	52	47	57	51	46	44
5	72	58	48	41	70	57	47	40	54	46	40	52	45	39	50	44	39	37
6	66	51	42	35	64	50	41	34	48	40	34	47	39	34	45	38	33	31
7	61	46	37	30	59	45	36	30	43	35	30	42	35	29	40	34	29	27
8	56	42	32	26	54	41	32	26	39	31	26	38	31	26	37	30	25	23
9	52	38	29	23	51	37	29	23	36	28	23	35	28	23	34	27	23	21
10	49	35	26	21	47	34	26	21	33	26	20	32	25	20	31	25	20	18

LAMPS (number of lamps)

Luminaire budgetary diagram

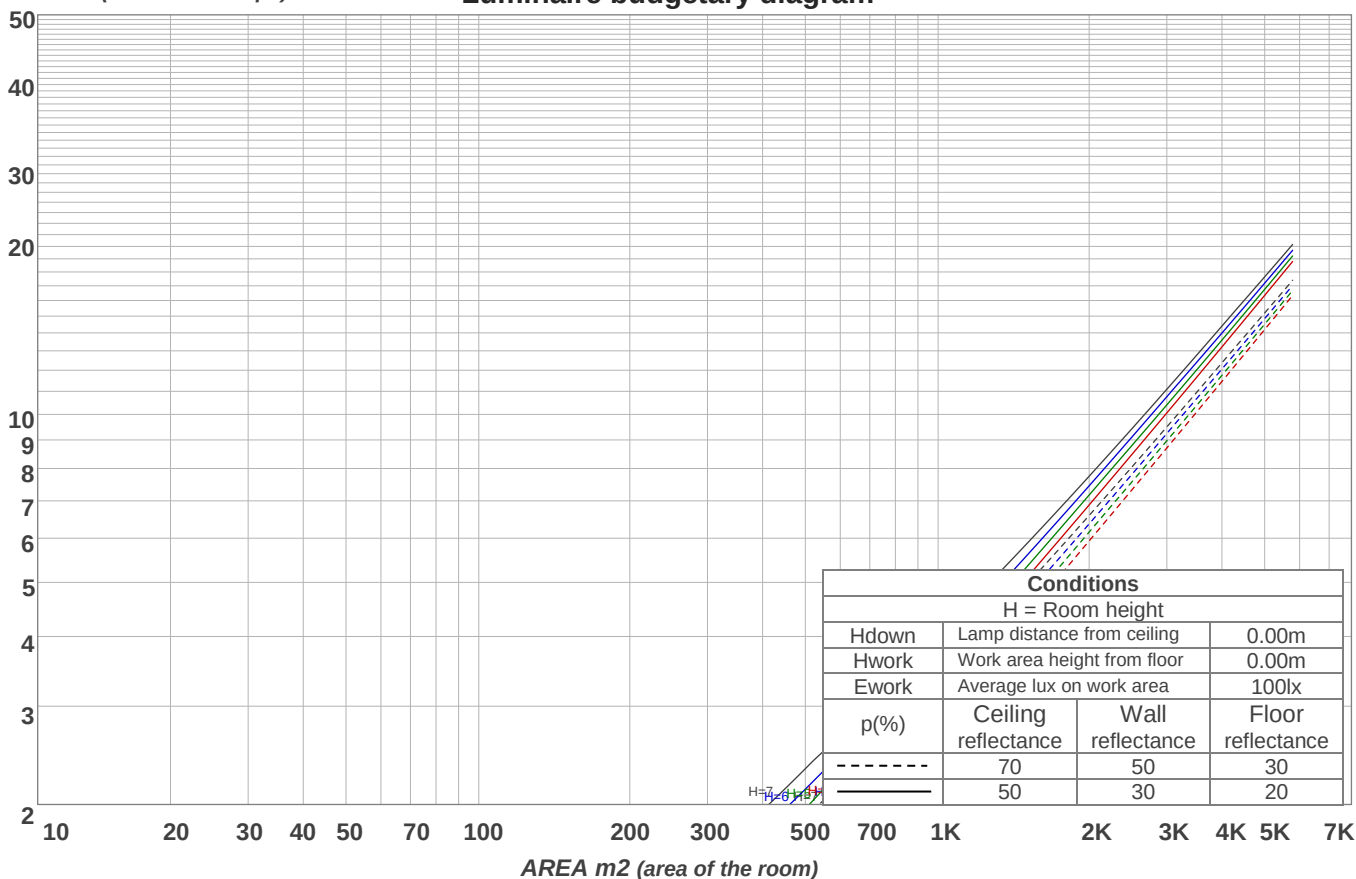

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
777 lm	2358 lm	3946 lm	5643 lm	7040 lm	7634 lm	6695 lm	3140 lm	596 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
40.7 lm	12.0 lm	14.6 lm	15.7 lm	15.4 lm	13.2 lm	10.3 lm	6.54 lm	2.25 lm




Road Report

LCS table


BUG rating:	B5 U3 G4	
Forward light	Lumens	Lumens %
Low(0-30):	3484.3	9.2%
Medium(30-60):	9812.7	25.8%
High(60-80):	4973.7	13.1%
Very high(80-90):	326.8	0.9%
Back light		
Low(0-30):	3598.6	9.5%
Medium(30-60):	10525	27.7%
High(60-80):	4896.4	12.9%
Very high(80-90):	273.3	0.7%
Uplight		
Low(90-100):	43.2	0.1%
High(100-180):	90.2	0.2%

LCS graph

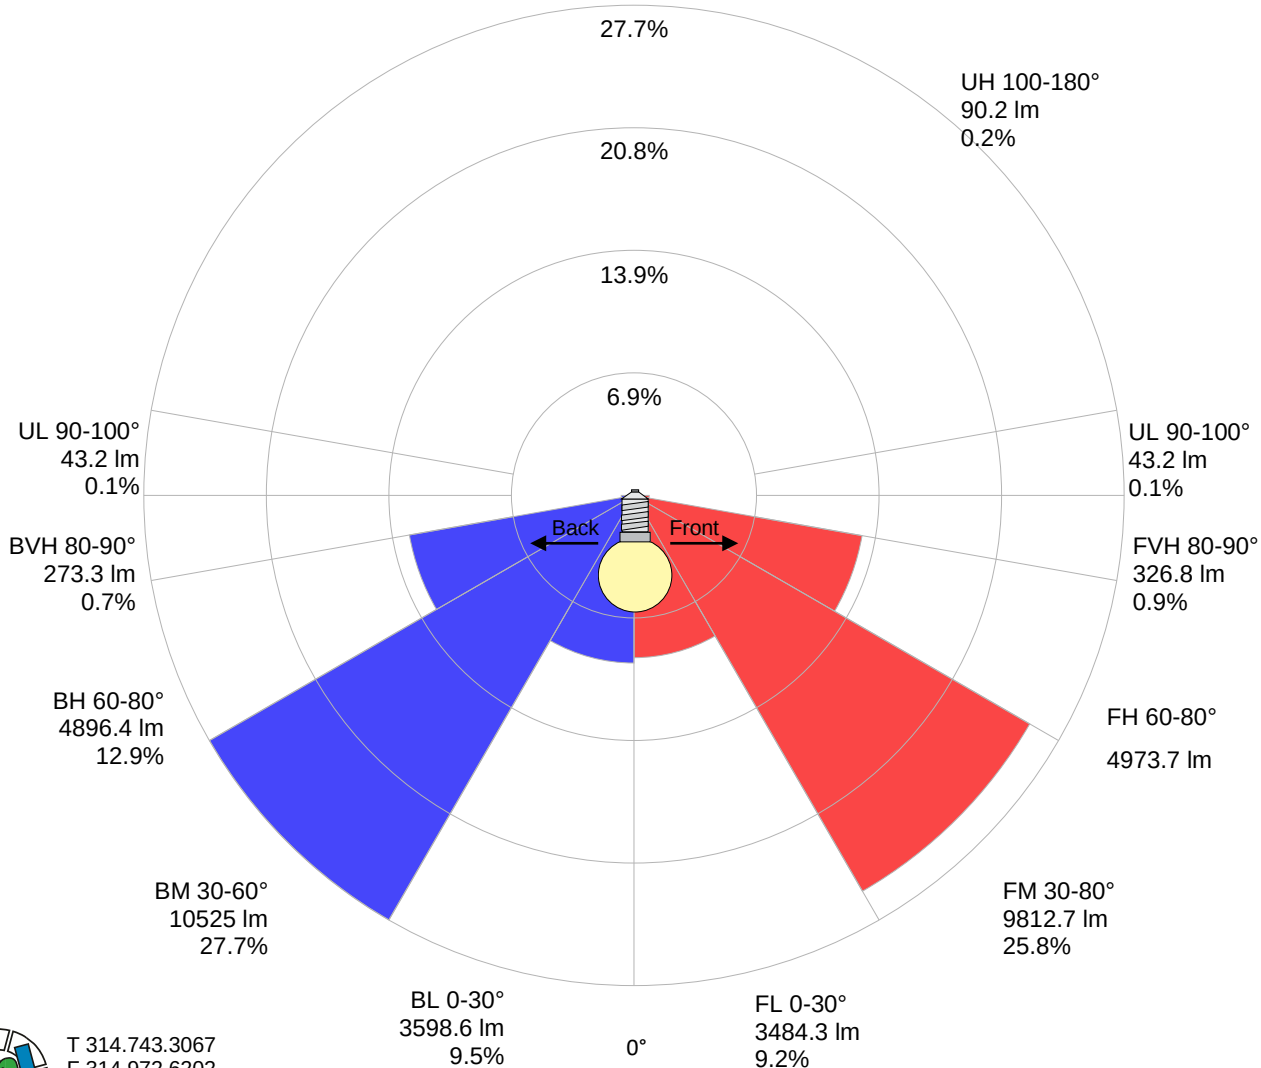

Stabilization

Warmup curve

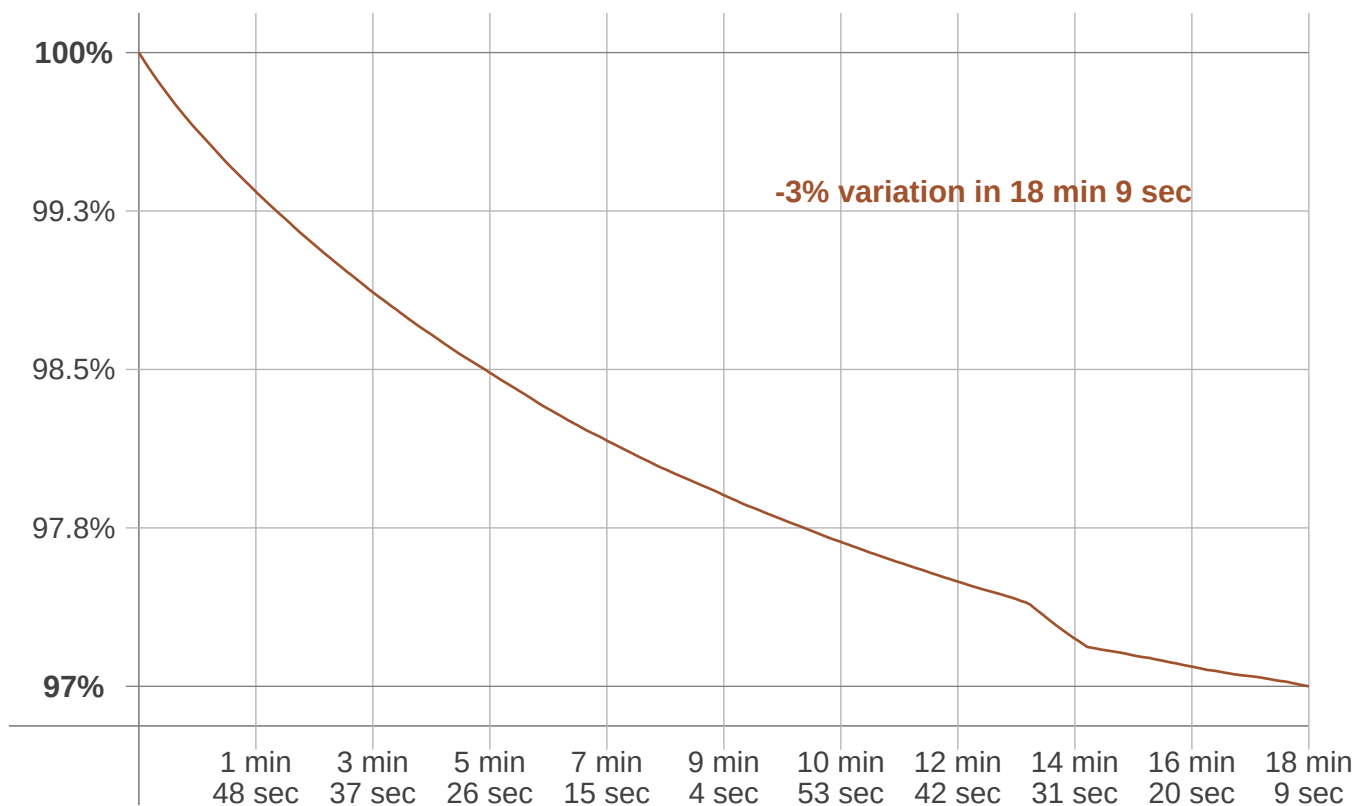

Warmup result

Warmup time:	18 min 9 sec
Warmup variation	-3.0%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5180 K	+50 K	5230 K

Output change

Output start	Output change	Output end
39094 lm	-1133 lm	37961 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

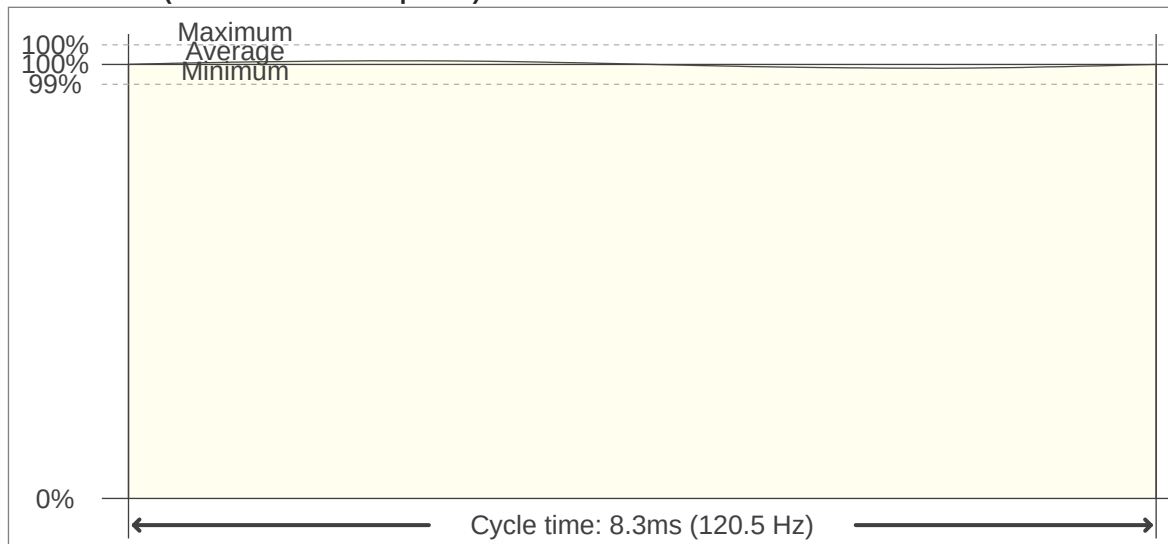

Flicker FFT (frequency scope of flicker curve)

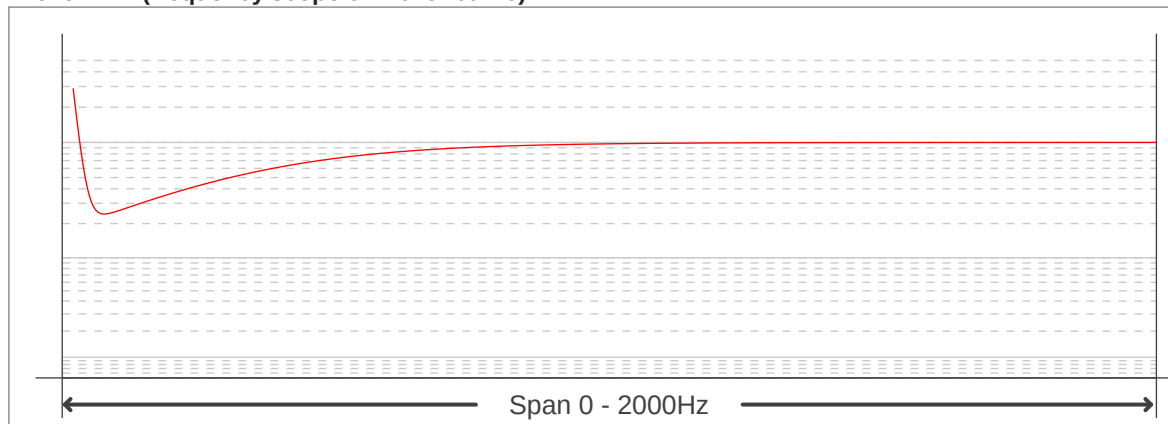

Flicker results:

Flicker frequency:	120.48 Hz
Flicker index:	0
Flicker percentage:	0.92 %
SVM: (Visual flicker)	0.03

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

