

Beam angle **119.6°**



Output: 20968 lm

Peak: 5799 cd

Power: 151 W


Light efficiency:



Light quality:



Beam details

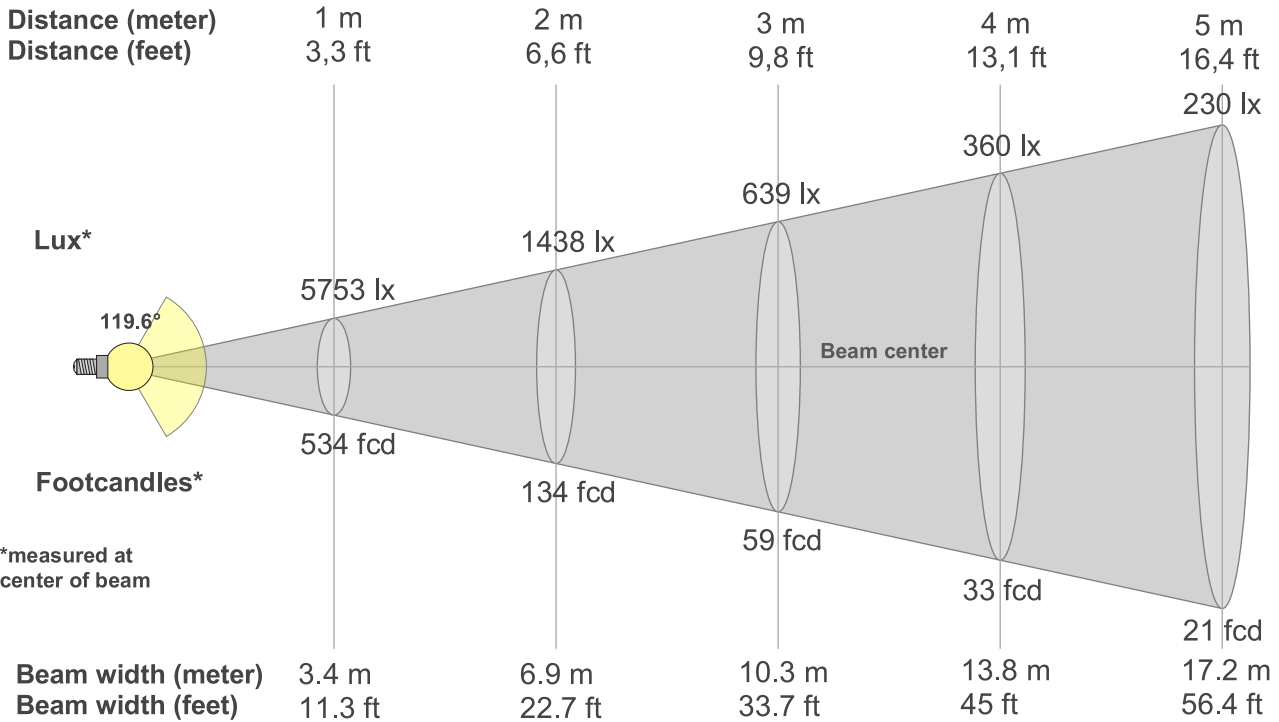

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
119.6°	199°	260.1°	65.3%	43.6%




T 314.743.3067

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/

ISO candela diagram

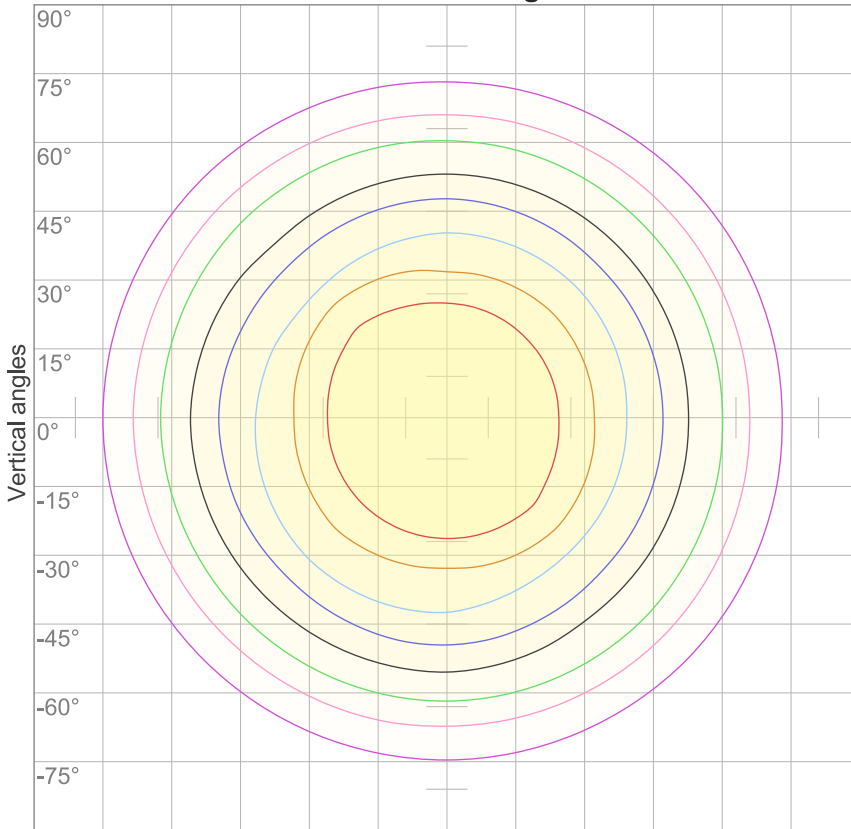


10%	575 cd
20%	1151 cd
30%	1726 cd
40%	2301 cd
50%	2876 cd
60%	3452 cd
70%	4027 cd
80%	4602 cd
90%	5178 cd

Conditions:

Number of c-planes: 8

Candela at center: 5753 cd

ISO lux diagram

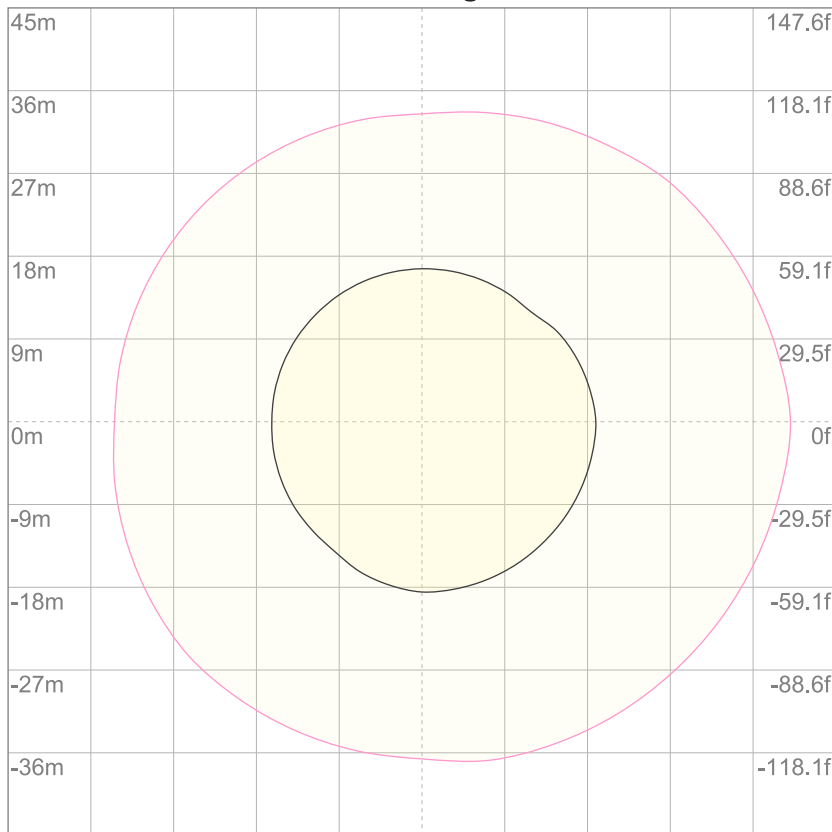

3%	1.73 lx
5%	2.88 lx
10%	5.75 lx
30%	17.3 lx
50%	28.8 lx

Conditions:

Number of c-planes: 8

Lux at center: 57.5 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters (33 feet)



T 314.743.3067

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/