

Light efficiency:

135 Lumen/Watt

Light quality:

CRI: 71.7

Color temperature:

5051 K

Output: 20780 lm

Peak: 11246 cd

Power: 153.7 W


PF: 1.0

Product name:

HPAL-NW150-BP9

Date and time:

4/25/2019 11:18:28 AM

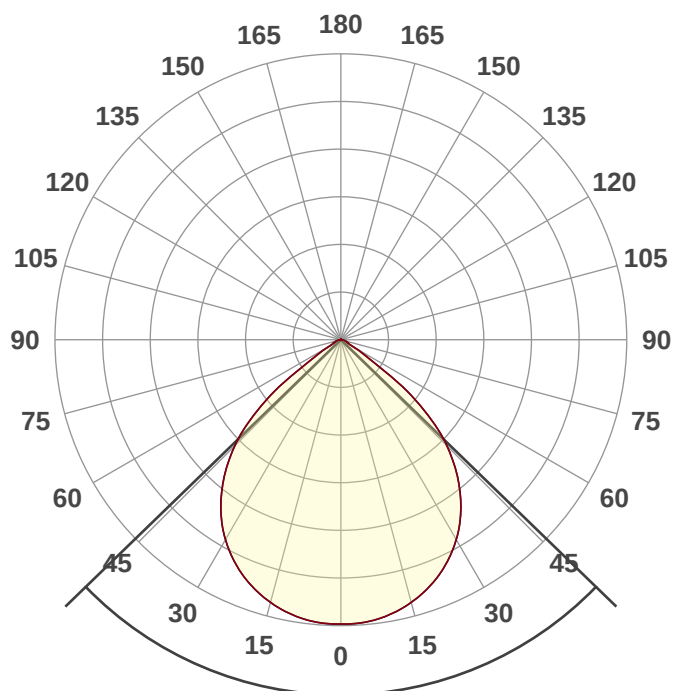

Beam angle

91.8°




CIE 1931


x: 0.344

y: 0.353

Spectra

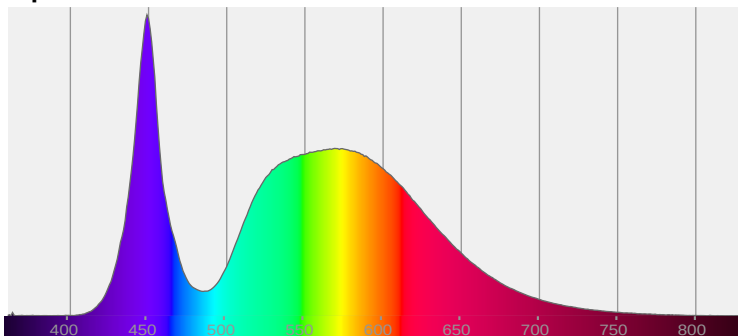

Power

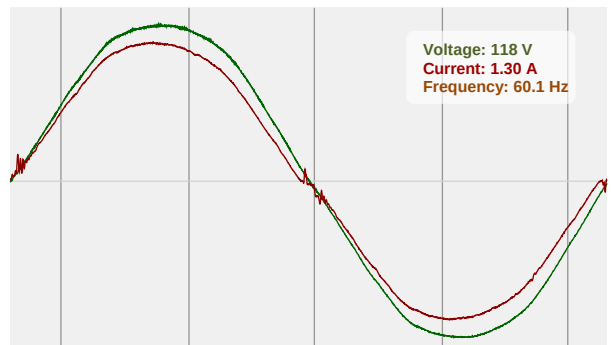



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

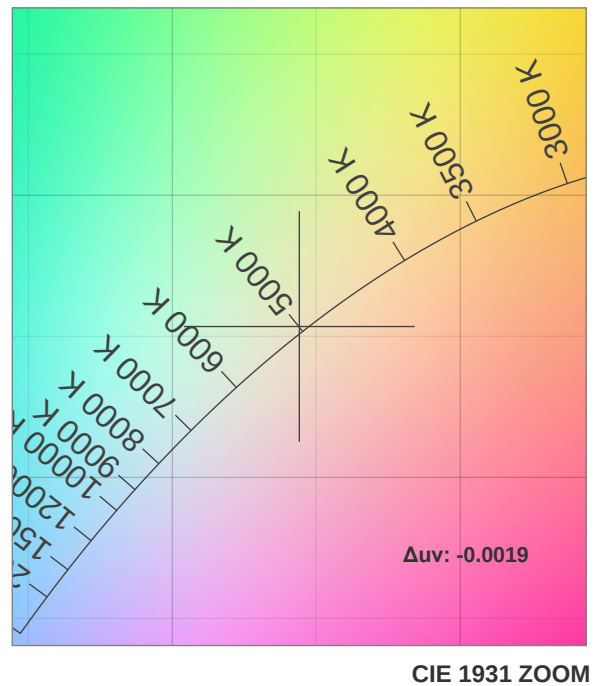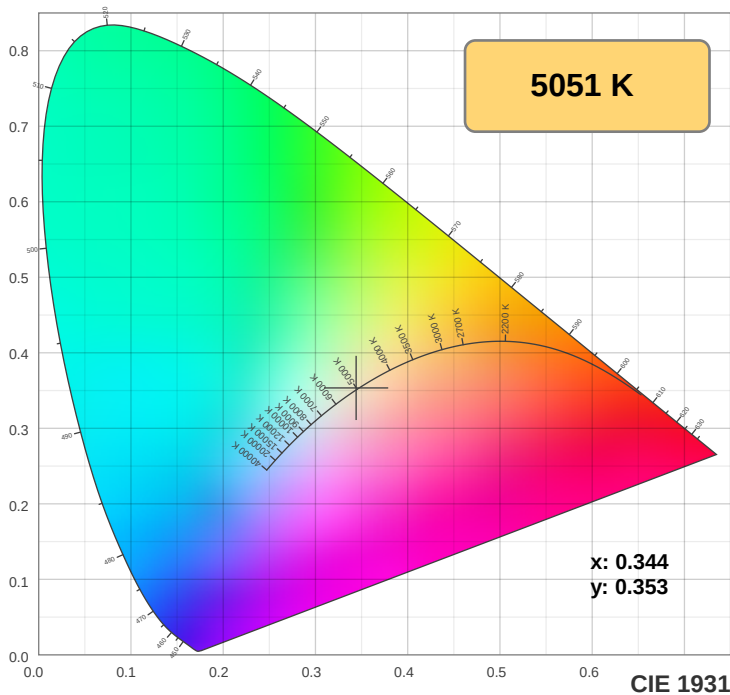

TM30: 69.6

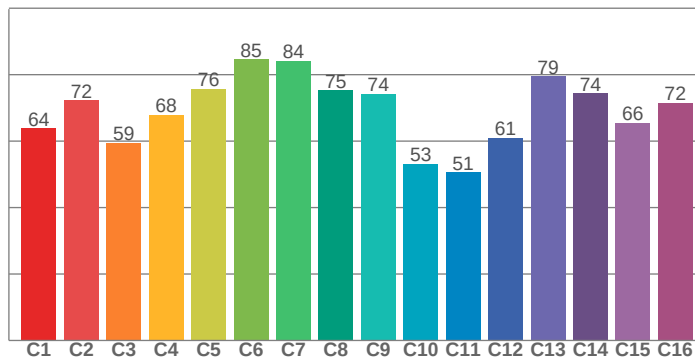

CRI: 71.7 (R1-R8)

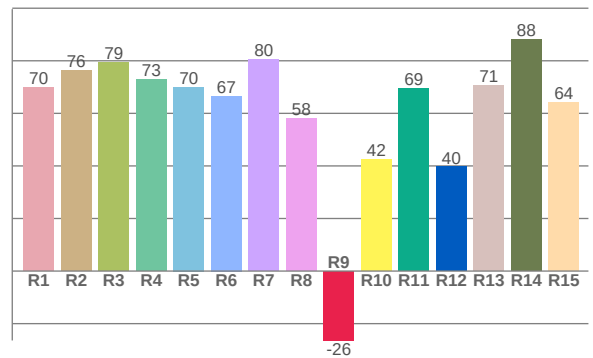

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
70.0	76.3	79.5	72.8	70.0	66.6	80.4	58.0	-26.4	42.3	69.4	39.6	70.6	88.2	64.1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
63.9	72.3	59.4	67.9	75.7	84.6	84.2	75.3	74.3	53.2	50.7	60.9	79.5	74.4	65.5	71.6

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
77.6	92.9	59.2	55.1	66.6	70.3	74.1	83.7	89.4	71.4	66.0	67.4	70.3	58.4	65.9

CQS: 69.3

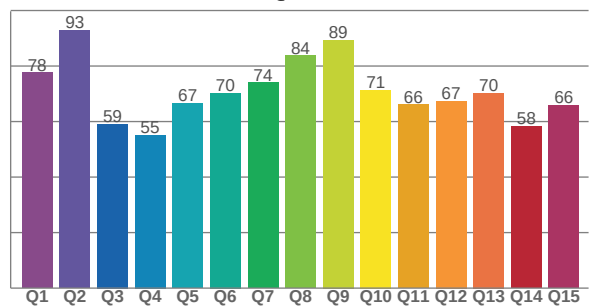

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5051 K	71.7	-26.4	69.6	93.7	69.3	0.344	0.353	0.210	0.324	-0.0019



TM30 Report







Rf 69.6

Fidelity index Rf


Rg 93.7

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	64	-17%	-3%
2	72	-12%	9%
3	59	-6%	20%
4	68	3%	18%
5	76	8%	11%
6	85	8%	-1%
7	84	-2%	-9%
8	75	-11%	-6%
9	74	-19%	8%
10	53	-13%	22%
11	51	-3%	29%
12	61	7%	19%
13	79	14%	3%
14	74	10%	-8%
15	66	3%	-23%
16	72	-4%	-17%

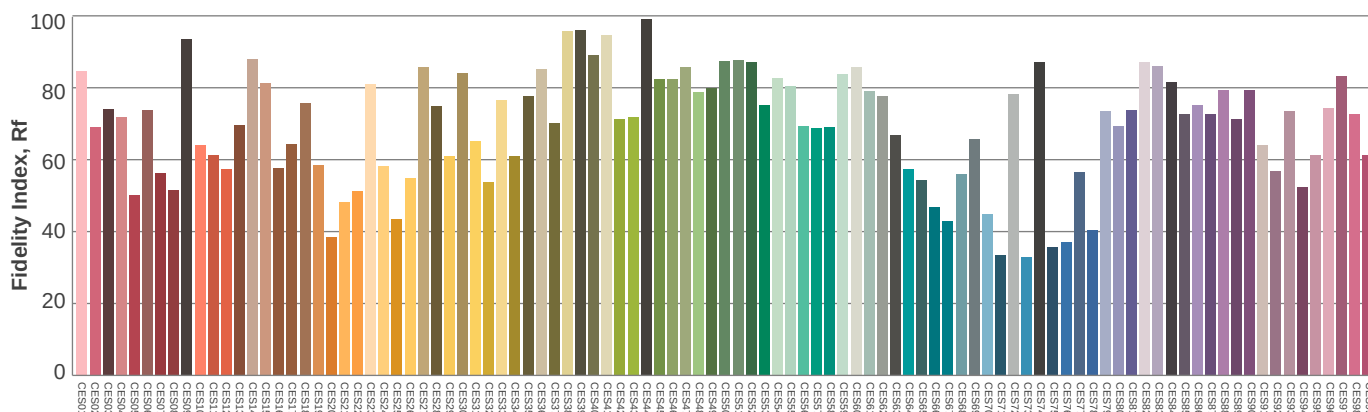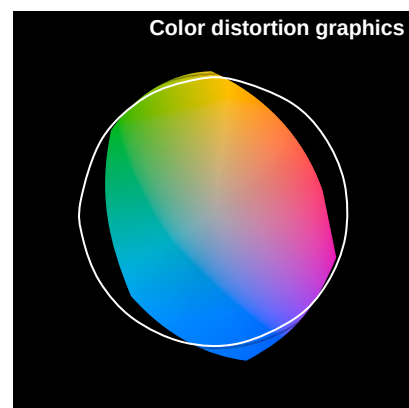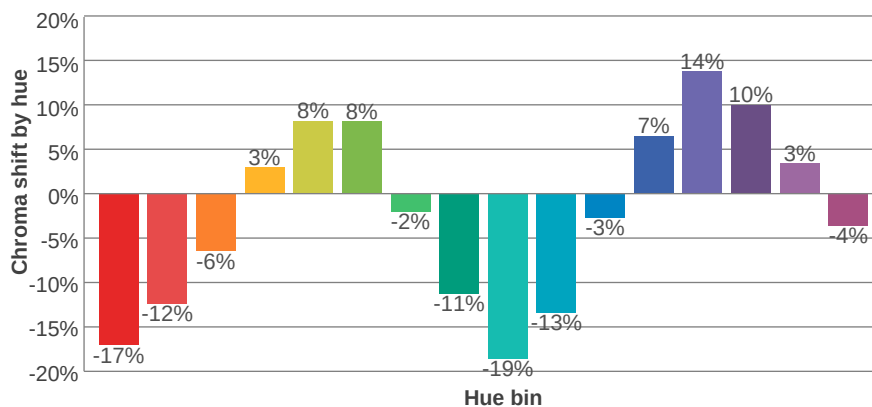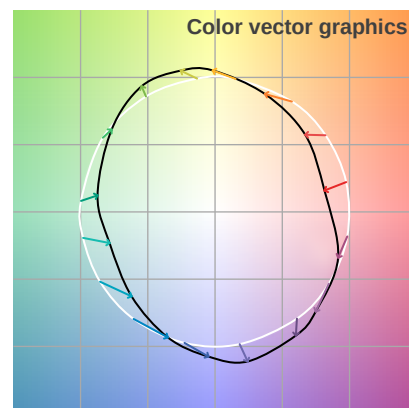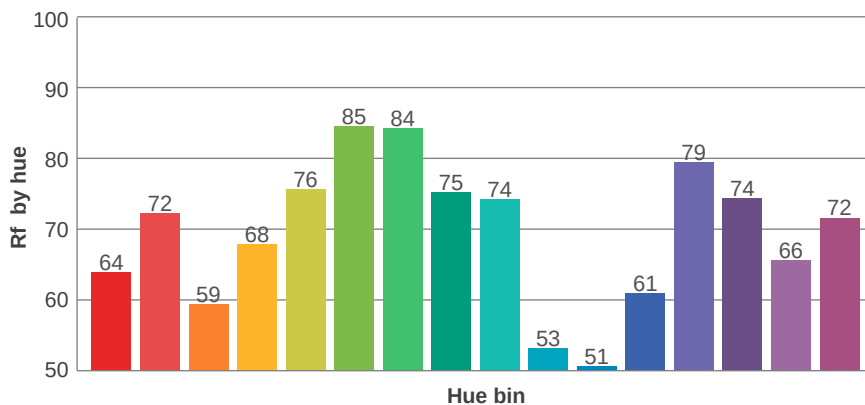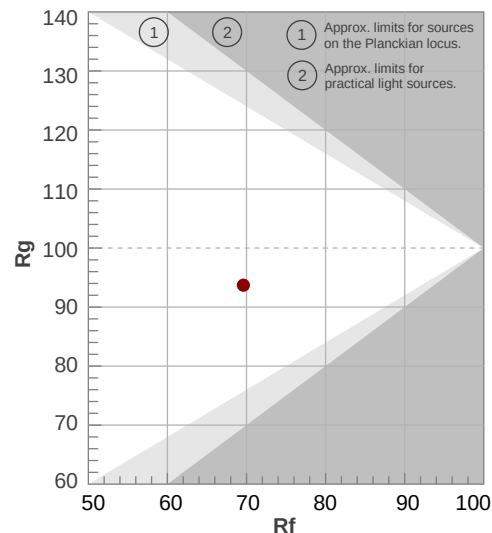

Illumination

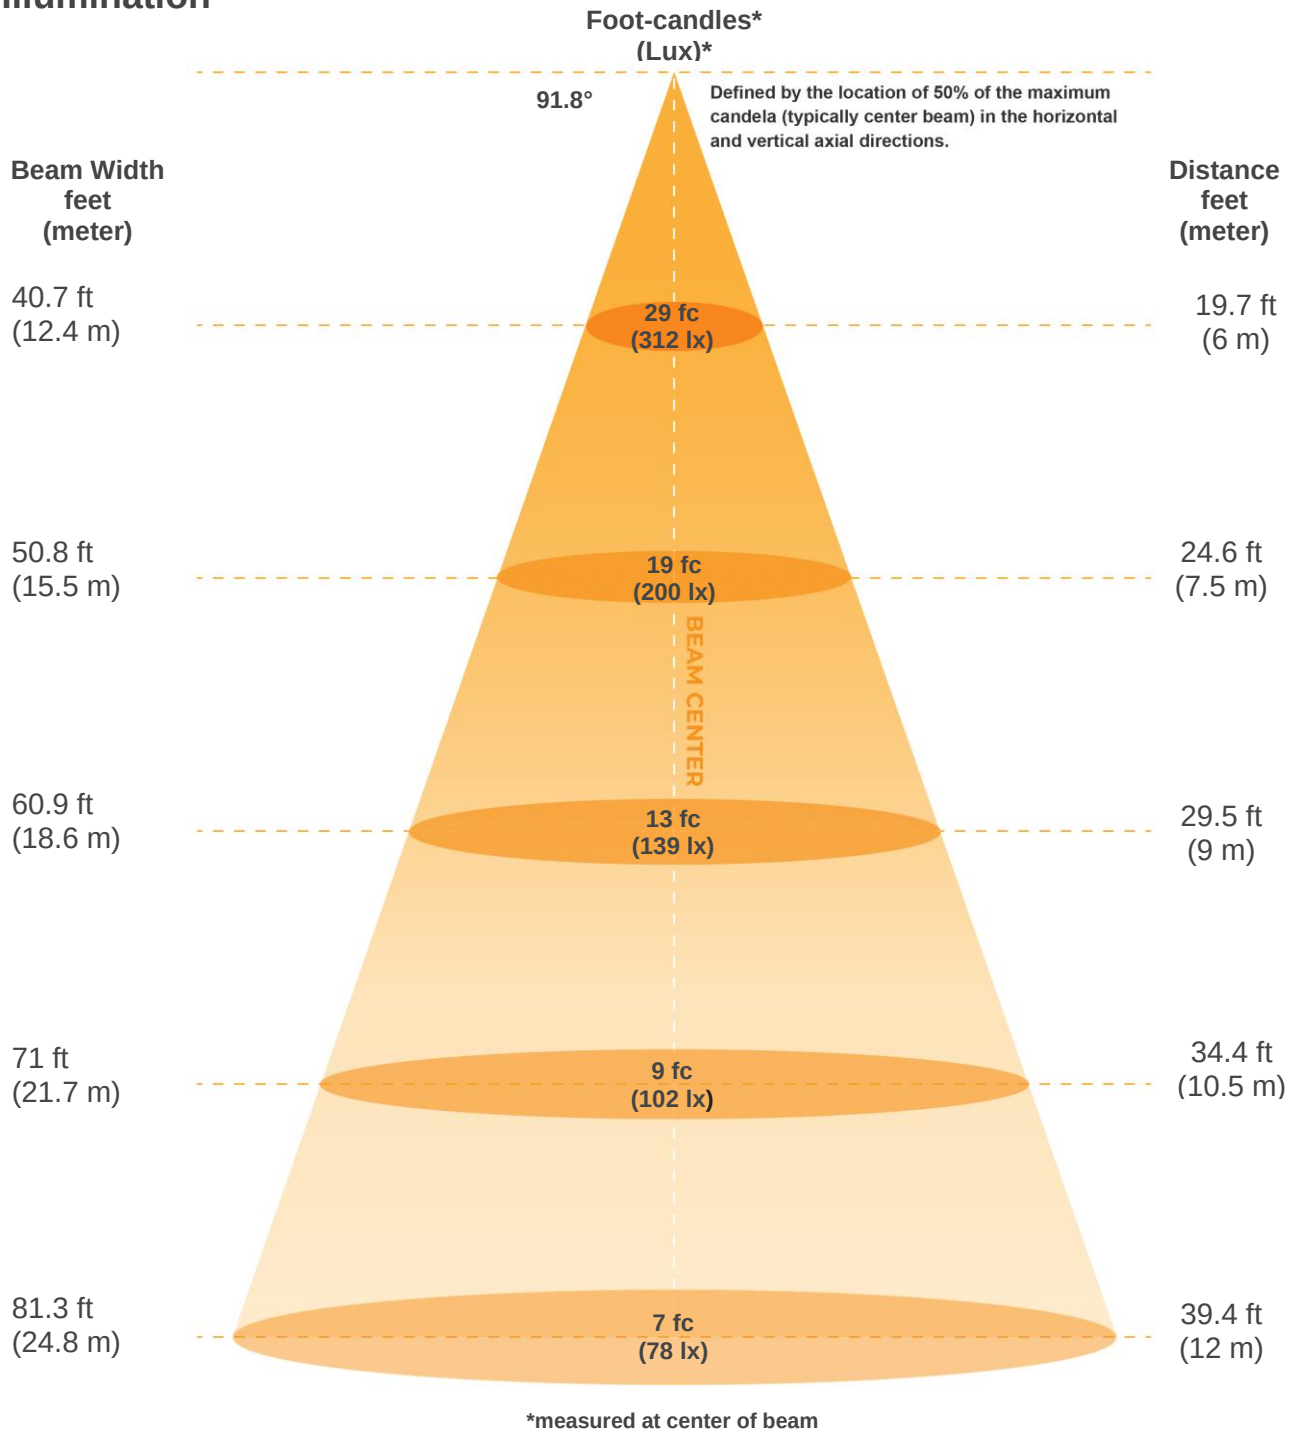

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
11246lx	2812lx	1250lx	703lx	450lx	312lx	230lx	176lx	139lx	112lx	93lx	78lx	67lx	57lx	50lx	44lx	39lx	35lx	31lx	28lx
1044.8fcd	261.2fcd	116.1fcd	65.3fcd	41.8fcd	29fcd	21.3fcd	16.3fcd	12.9fcd	10.4fcd	8.6fcd	7.3fcd	6.2fcd	5.3fcd	4.6fcd	4.1fcd	3.6fcd	3.2fcd	2.9fcd	2.6fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
91.8°	114.4°	136.2°	97.0%	78.1%



ISO Diagrams

ISO candela diagram

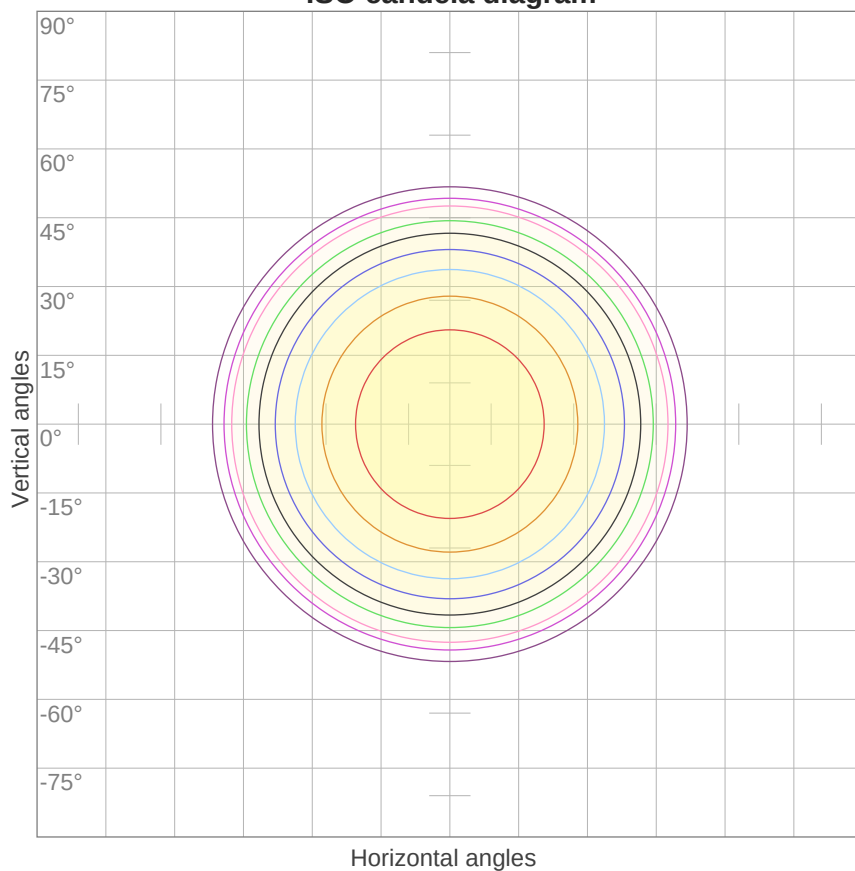


10%	1125 cd
20%	2249 cd
30%	3374 cd
40%	4498 cd
50%	5623 cd
60%	6748 cd
70%	7872 cd
80%	8997 cd
90%	10121 cd

Conditions:

Number of c-planes: 16

Candela at center: 11246 cd

ISO lux diagram

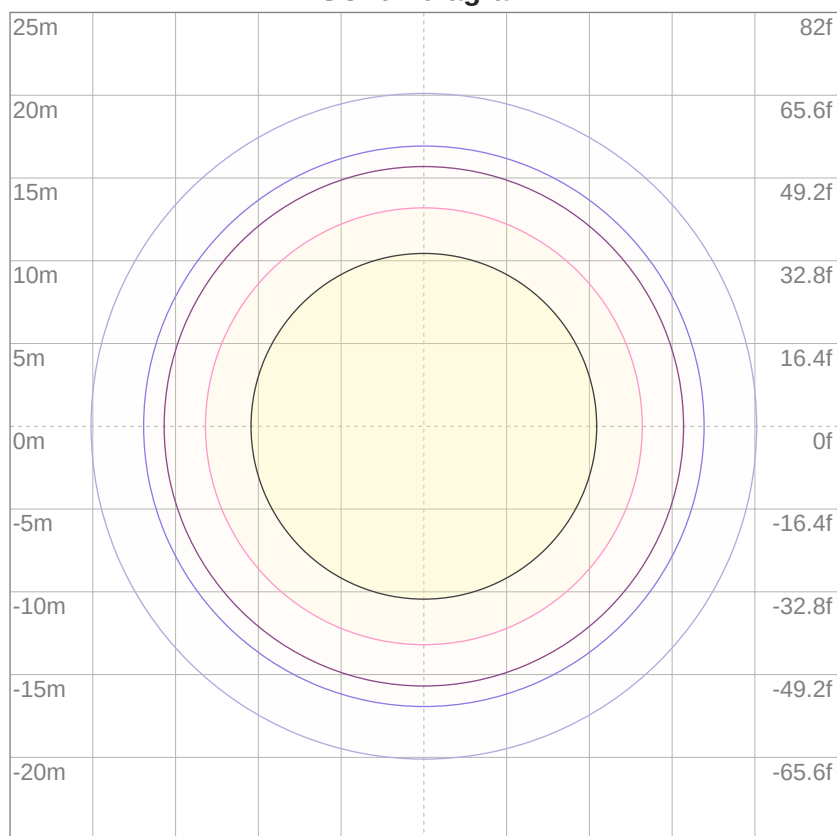

3%	3.37 lx
5%	5.62 lx
10%	11.2 lx
30%	33.7 lx
50%	56.2 lx

Conditions:

Number of c-planes: 16

Lux at center: 112 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86	90	87	84	87	84	82	80
3	97	89	83	78	95	87	82	77	85	80	76	82	78	74	80	76	73	71
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64
5	84	74	66	61	82	73	66	60	71	65	60	69	63	59	67	62	59	57
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51
7	73	62	54	49	72	61	54	49	60	53	49	58	52	48	57	52	48	46
8	69	57	49	44	67	56	49	44	55	49	44	54	48	44	53	47	44	42
9	64	53	45	40	63	52	45	40	51	45	40	50	44	40	49	44	40	38
10	61	49	42	37	59	48	41	37	47	41	37	46	41	37	46	40	37	35

LAMPS (number of lamps)

Luminaire budgetary diagram

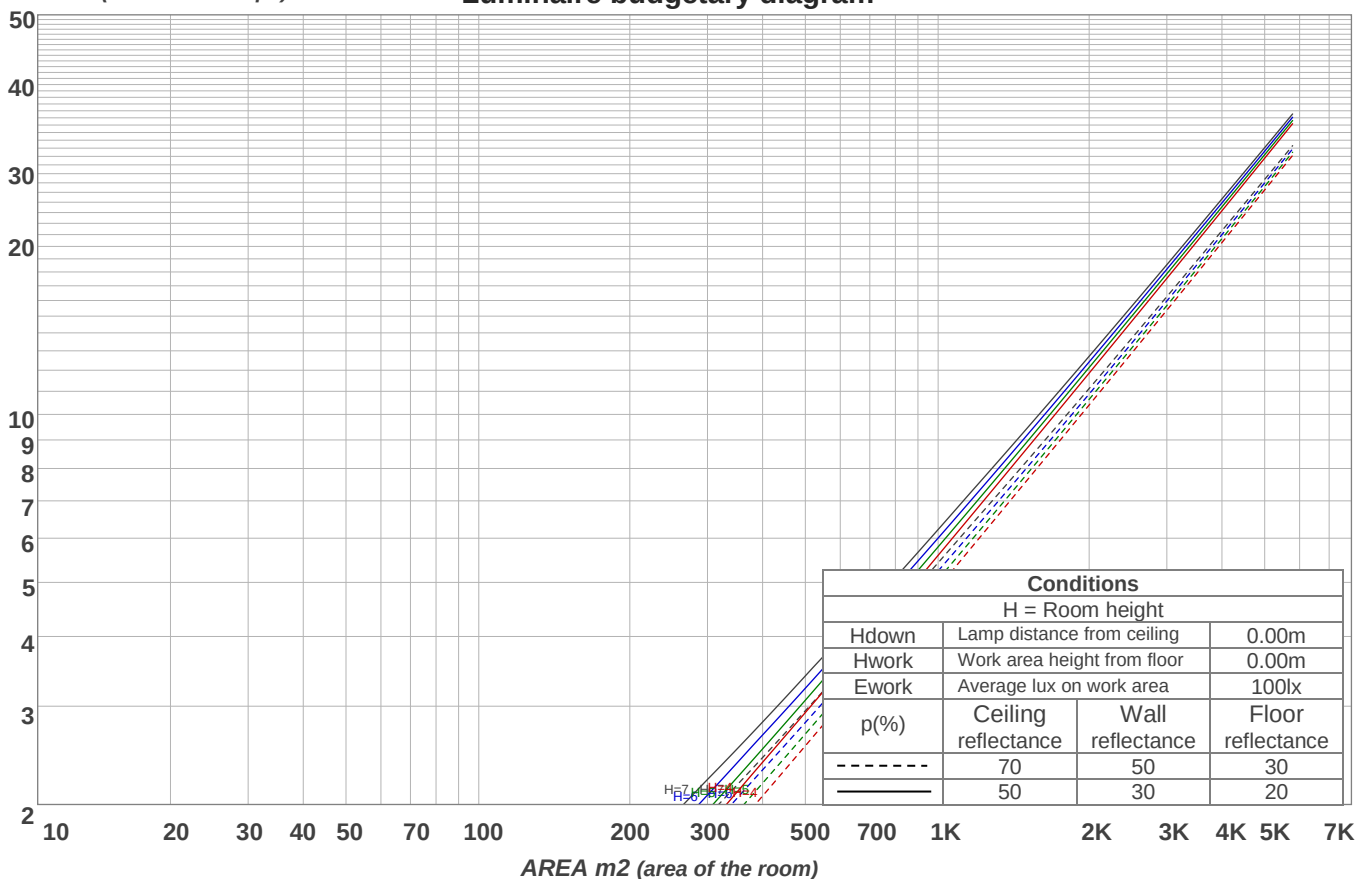

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
1066 lm	3038 lm	4523 lm	5159 lm	4510 lm	1871 lm	336 lm	187 lm	50.1 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
2.86 lm	3.05 lm	3.88 lm	5.34 lm	6.48 lm	6.78 lm	5.91 lm	4.37 lm	1.56 lm




Road Report

LCS table


BUG rating:	B4 U2 G1	
Forward light	Lumens	Lumens %
Low(0-30):	4299.9	20.7%
Medium(30-60):	5769.1	27.8%
High(60-80):	274.8	1.3%
Very high(80-90):	25.9	0.1%
Back light		
Low(0-30):	4299.9	20.7%
Medium(30-60):	5769.1	27.8%
High(60-80):	274.8	1.3%
Very high(80-90):	25.9	0.1%
Uplight		
Low(90-100):	3.5	0%
High(100-180):	37.4	0.2%

LCS graph

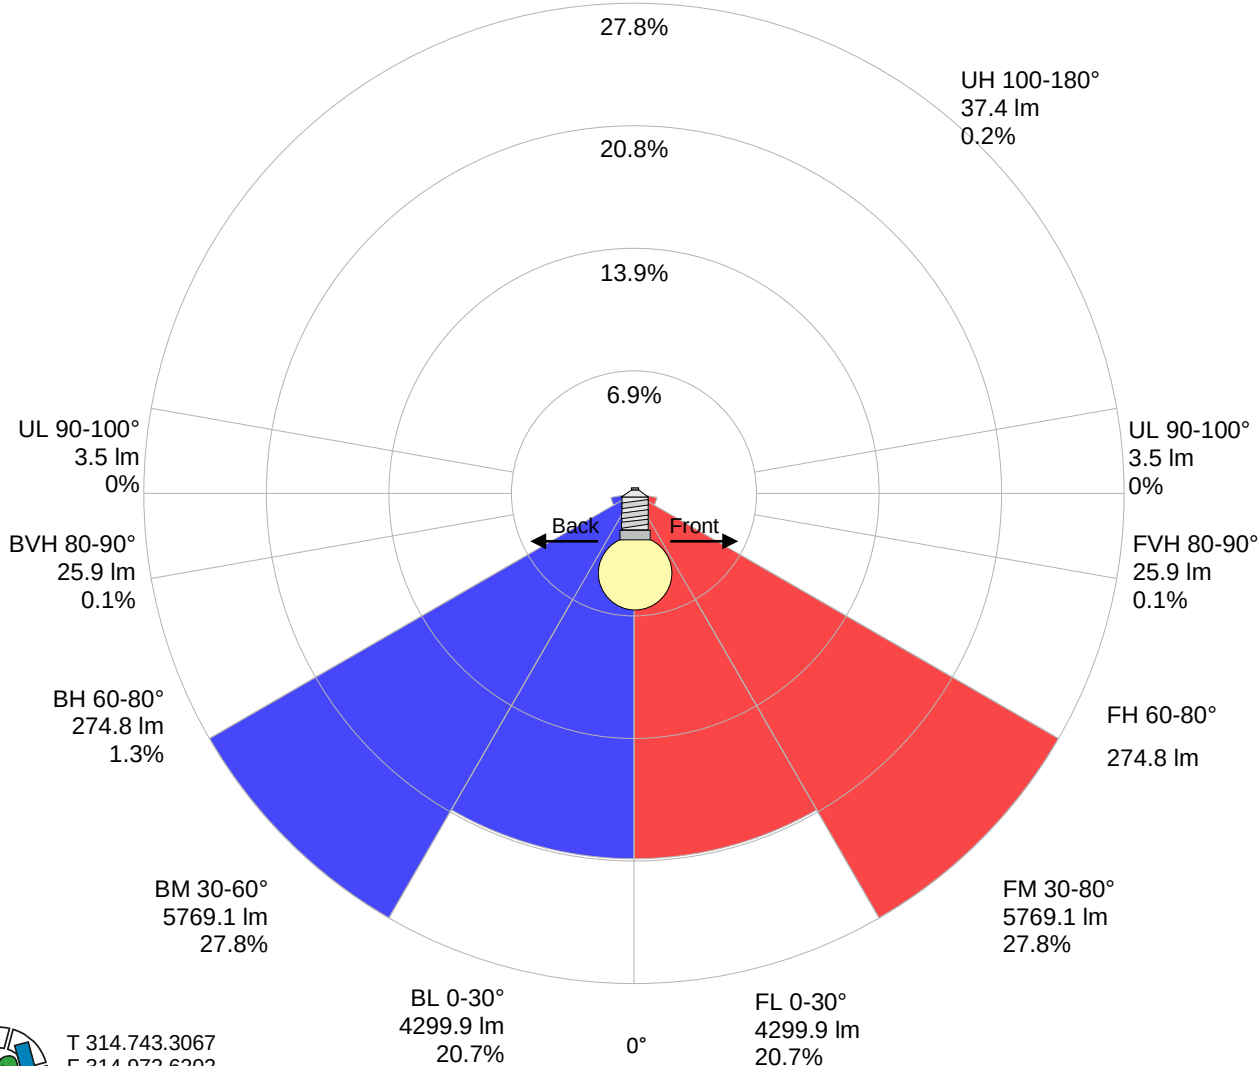

Stabilization

Warmup curve

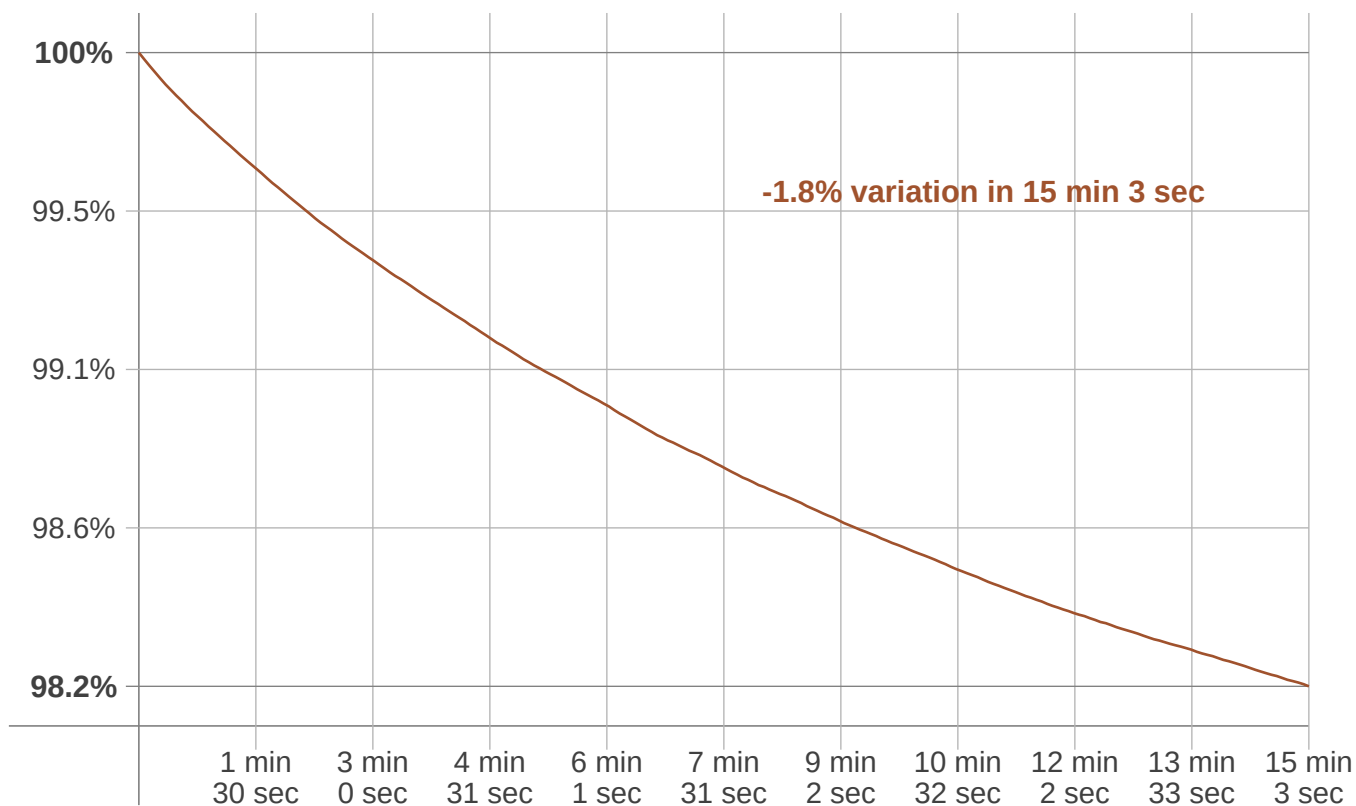

Warmup result

Warmup time:	15 min 3 sec
Warmup variation	-1.8%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5031 K	+20 K	5051 K

Output change

Output start	Output change	Output end
21158 lm	-377 lm	20780 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

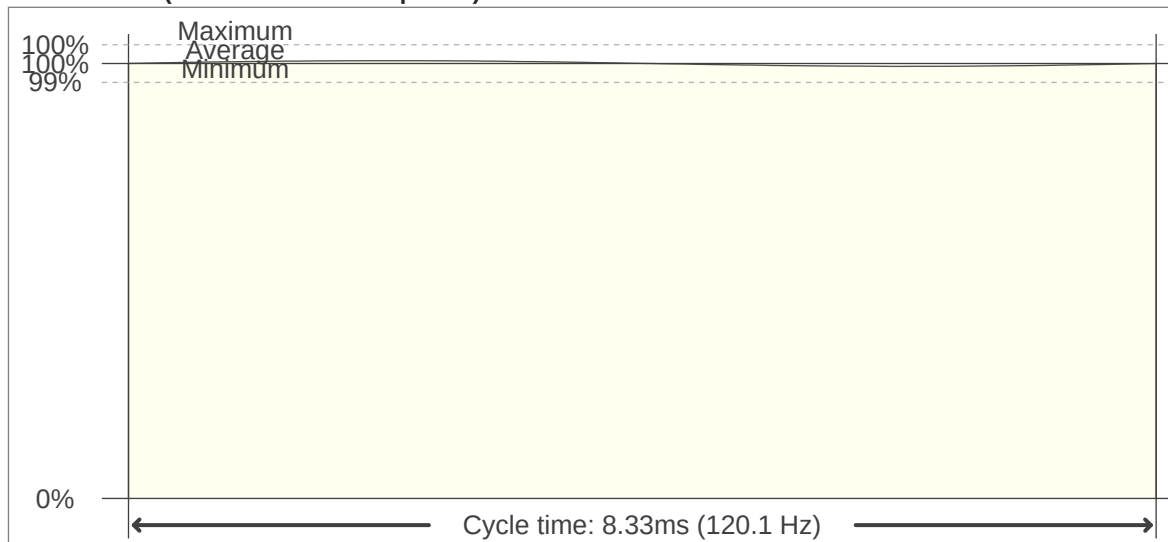

Flicker FFT (frequency scope of flicker curve)

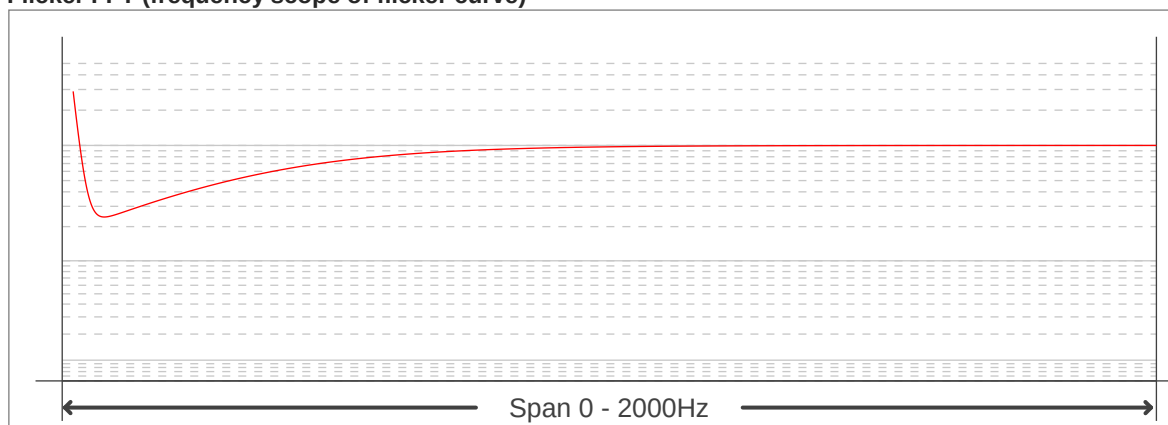

Flicker results:

Flicker frequency:	120.12 Hz
Flicker index:	0
Flicker percentage:	0.66 %
SVM: (Visual flicker)	0.02

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

