

Light efficiency:

123 Lumen/Watt

Output: 3042 lm

Light quality:

CRI: 81.9


Peak: 1030 cd

Color temperature:

3856 K

Power: 24.7 W

PF: 0.99

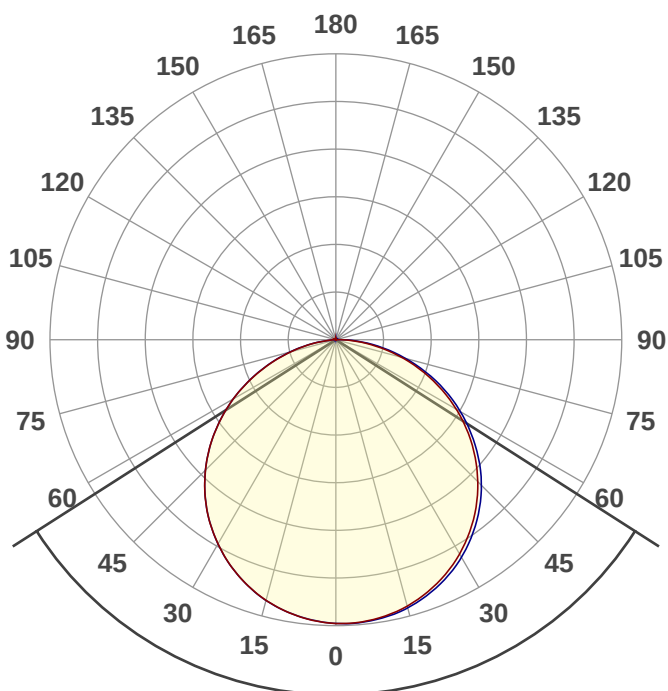

Product name:

LPD5-40K22-25-2801

Date and time:

5/2/2019 3:42:34 PM

Beam angle

114.8°




CIE 1931


x: 0.390

y: 0.390

Spectra

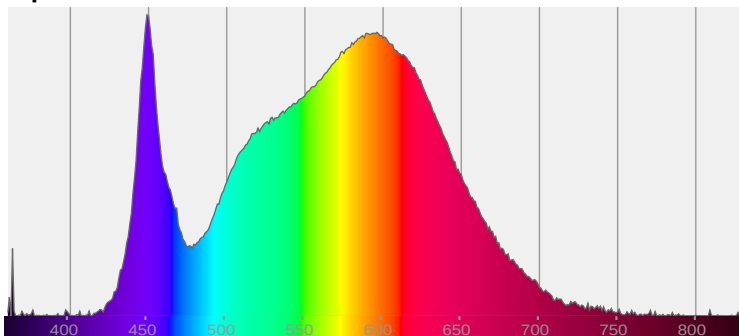

Power

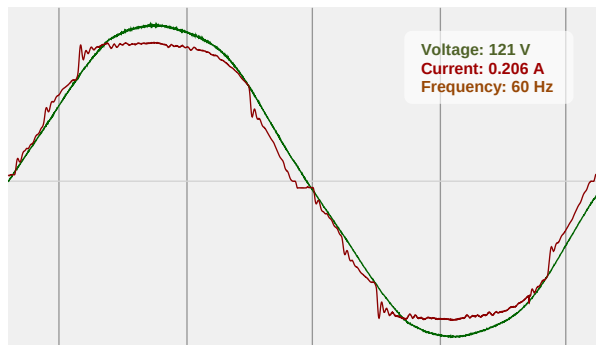



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

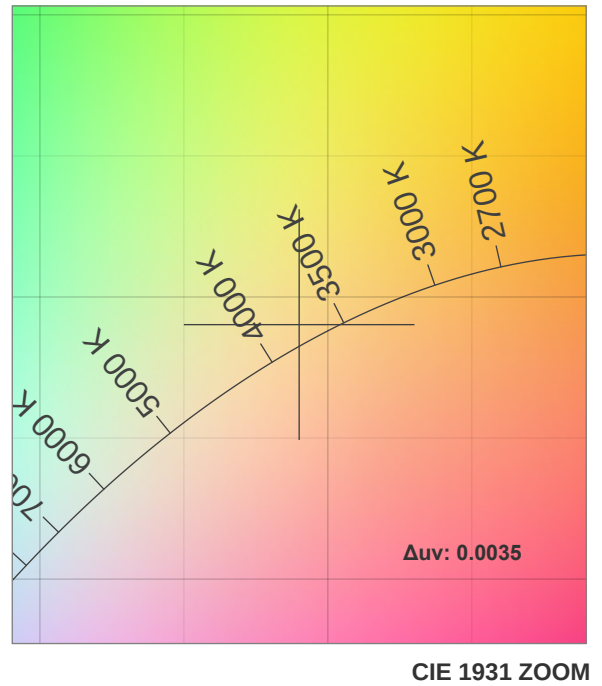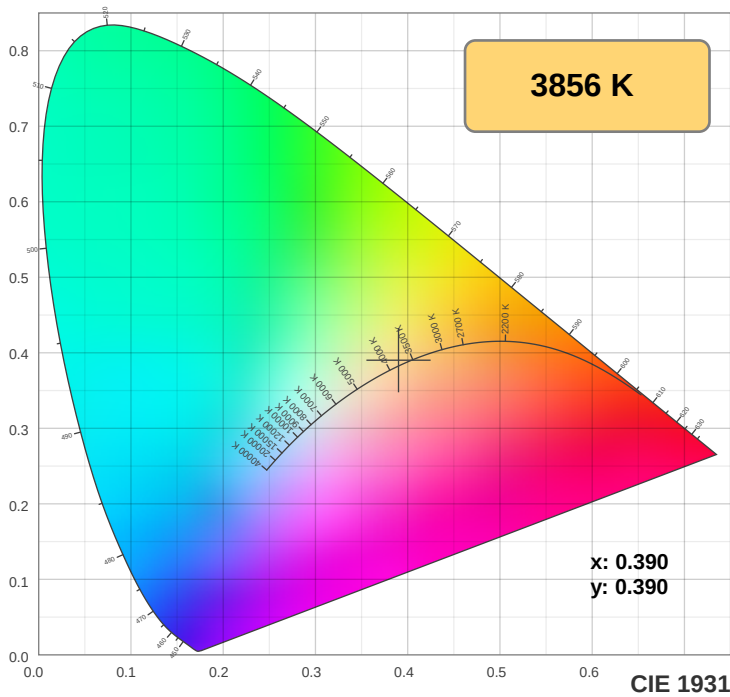

TM30: 82.2

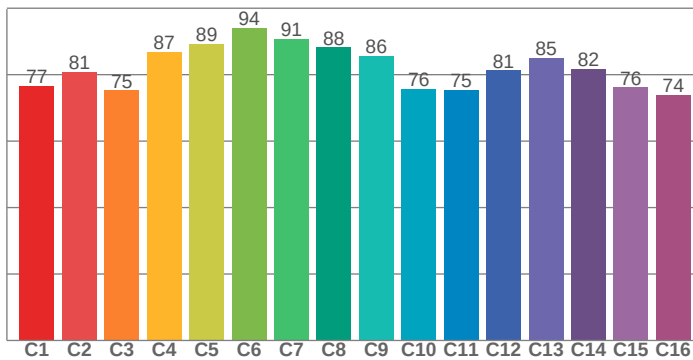

CRI: 81.9 (R1-R8)

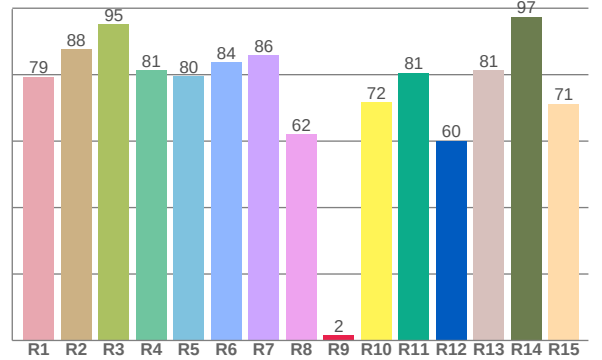

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
79.4	87.7	95.2	81.4	79.5	83.7	85.9	62.2	1.6	71.8	80.6	60.1	81.3	97.5	71.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
76.7	80.9	75.3	86.9	89.3	94.1	90.7	88.2	85.7	75.8	75.5	81.3	85.0	81.8	76.2	73.9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79.8	97.9	80.4	77.7	81.9	82.9	84.5	88.7	97.5	89.4	86.4	84.5	83.3	69.9	73.5

CQS: 82.3

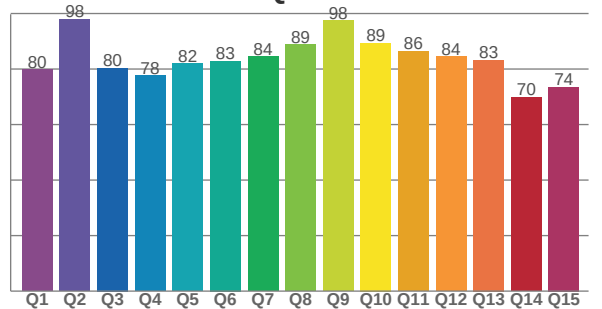

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3856 K	81.9	1.6	82.2	95.1	82.3	0.390	0.390	0.226	0.339	0.0035



TM30 Report







Rf 82.2

Fidelity index Rf


Rg 95.1

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	77	-12%	-1%
2	81	-8%	6%
3	75	-4%	11%
4	87	0%	7%
5	89	1%	4%
6	94	2%	-2%
7	91	-4%	-3%
8	88	-6%	-1%
9	86	-7%	5%
10	76	-7%	11%
11	75	2%	15%
12	81	6%	6%
13	85	5%	-6%
14	82	10%	-12%
15	76	-2%	-15%
16	74	-6%	-13%

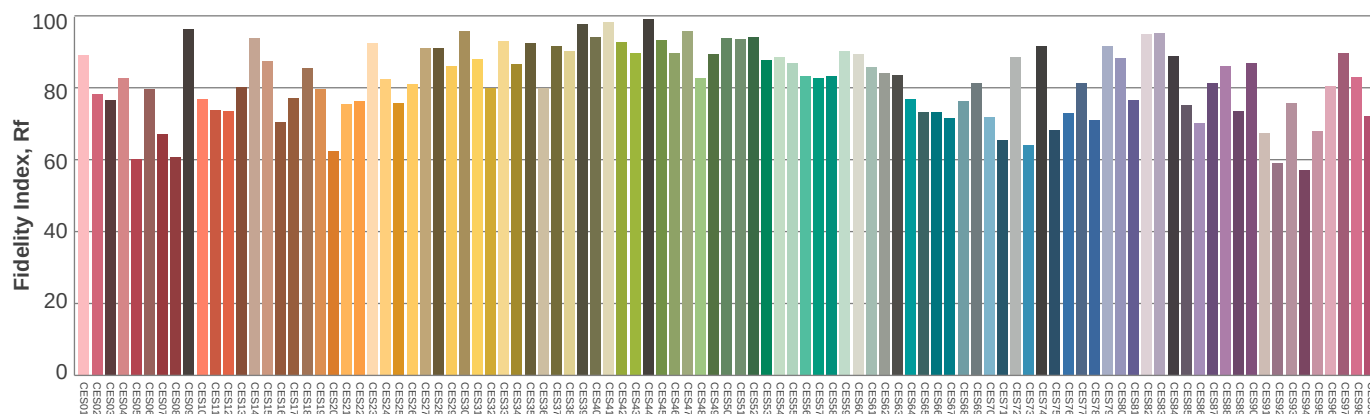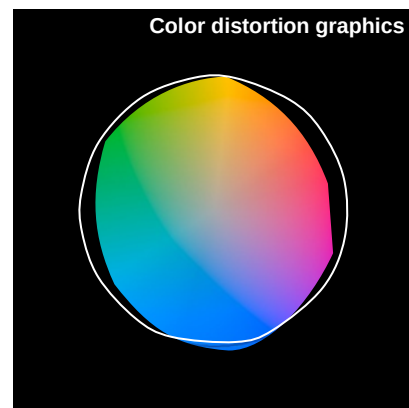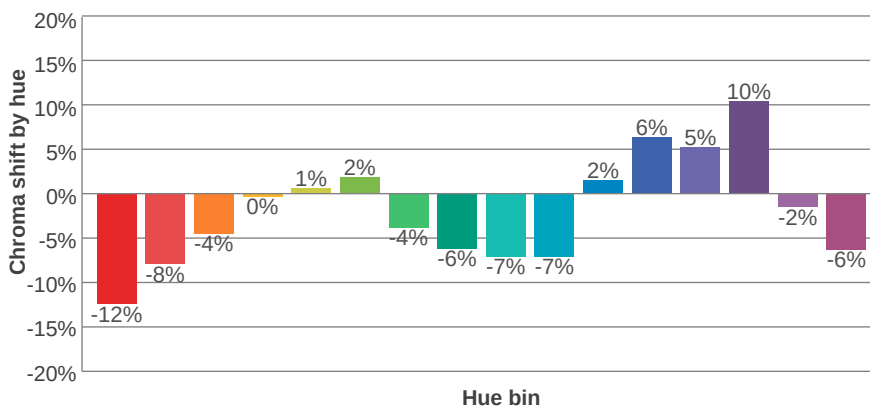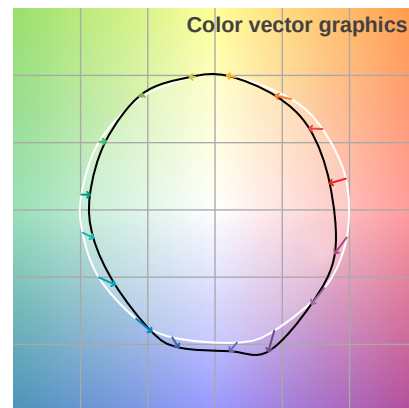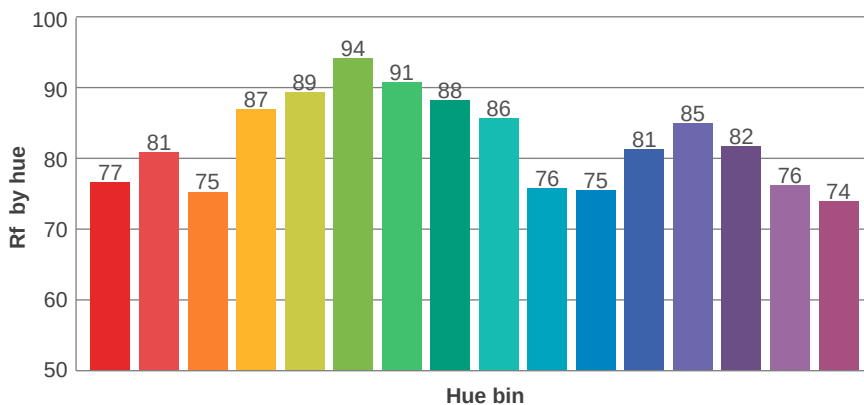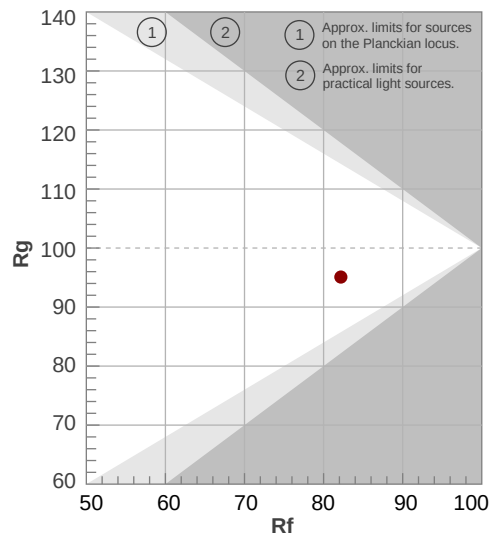

Illumination

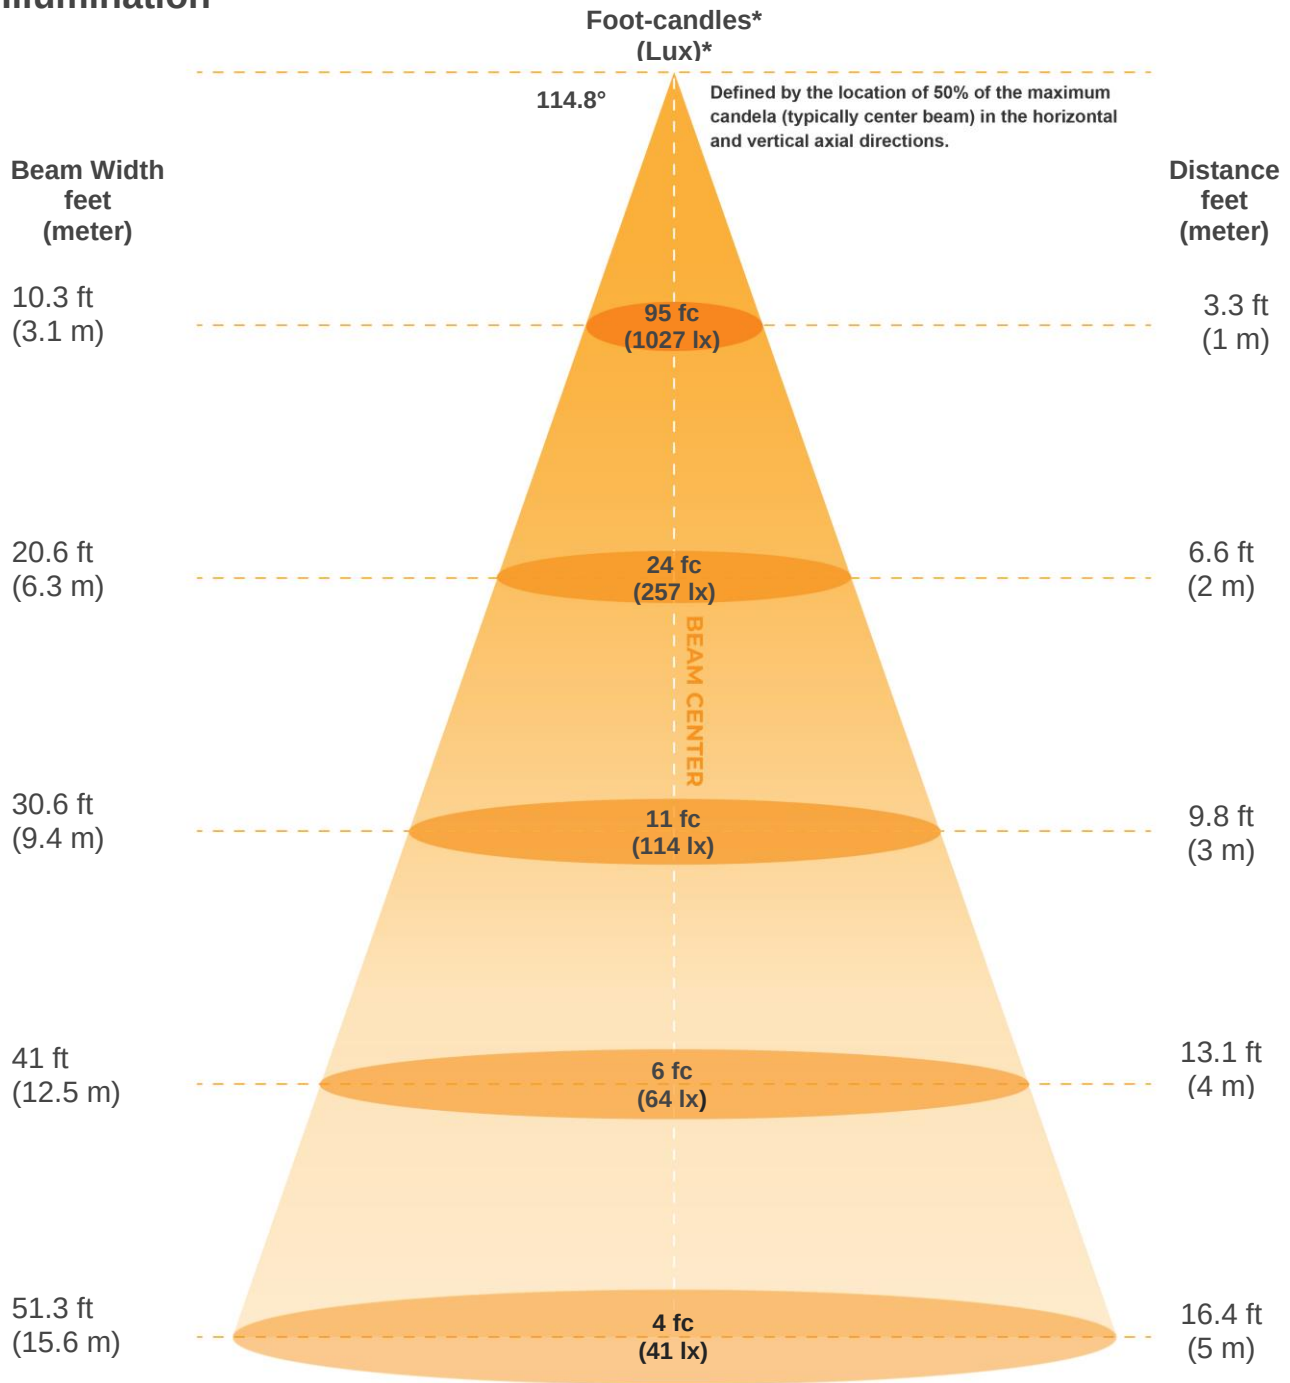

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1027lx	257lx	114lx	64lx	41lx	29lx	21lx	16lx	13lx	10lx	8lx	7lx	6lx	5lx	5lx	4lx	4lx	3lx	3lx	3lx
95.4fcd	23.9fcd	10.6fcd	6fcd	3.8fcd	2.7fcd	1.9fcd	1.5fcd	1.2fcd	1fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd	0.3fcd	0.3fcd	0.2fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
114.8°	163.7°	175.6°	77.4%	52.4%



ISO Diagrams

ISO candela diagram

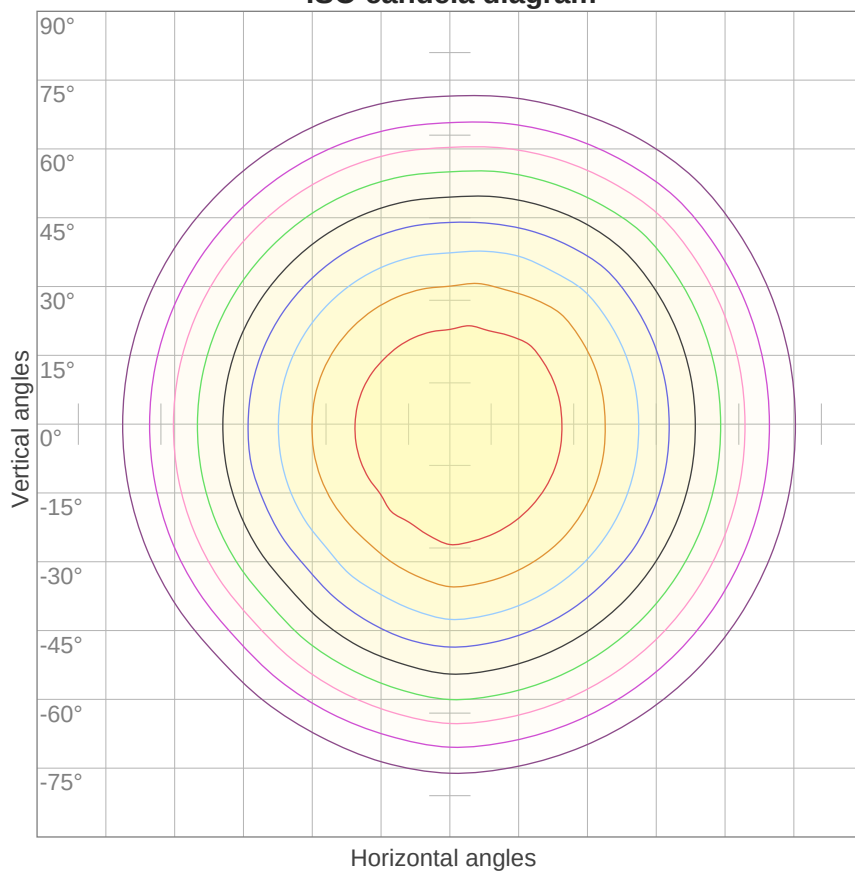


10%	103 cd
20%	205 cd
30%	308 cd
40%	411 cd
50%	514 cd
60%	616 cd
70%	719 cd
80%	822 cd
90%	925 cd

Conditions:

Number of c-planes: 8

Candela at center: 1027 cd

ISO lux diagram

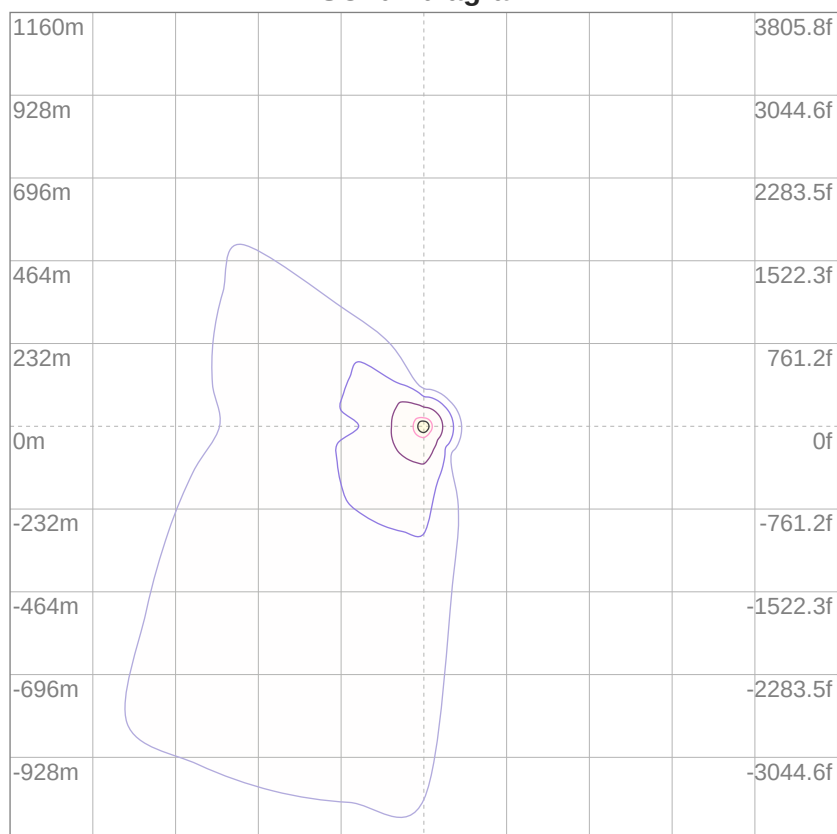

3%	0.308 lx
5%	0.514 lx
10%	1.03 lx
30%	3.08 lx
50%	5.14 lx

Conditions:

Number of c-planes: 8

Lux at center: 10.3 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	99	95	106	101	97	93	97	93	90	93	90	88	89	87	85	83
2	98	90	83	77	96	88	81	76	84	79	74	81	76	72	78	74	71	69
3	89	79	70	64	87	77	69	63	74	67	62	71	66	61	69	64	60	57
4	82	70	61	54	79	68	60	53	66	58	53	63	57	52	61	56	51	49
5	75	62	53	46	73	61	52	46	59	51	45	57	50	45	55	49	44	42
6	69	56	47	40	67	55	46	40	53	45	40	51	44	39	50	44	39	37
7	64	51	42	35	62	50	41	35	48	41	35	47	40	35	45	39	34	32
8	60	46	37	32	58	45	37	31	44	37	31	43	36	31	42	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	36	30	25	23

LAMPS (number of lamps)

Luminaire budgetary diagram

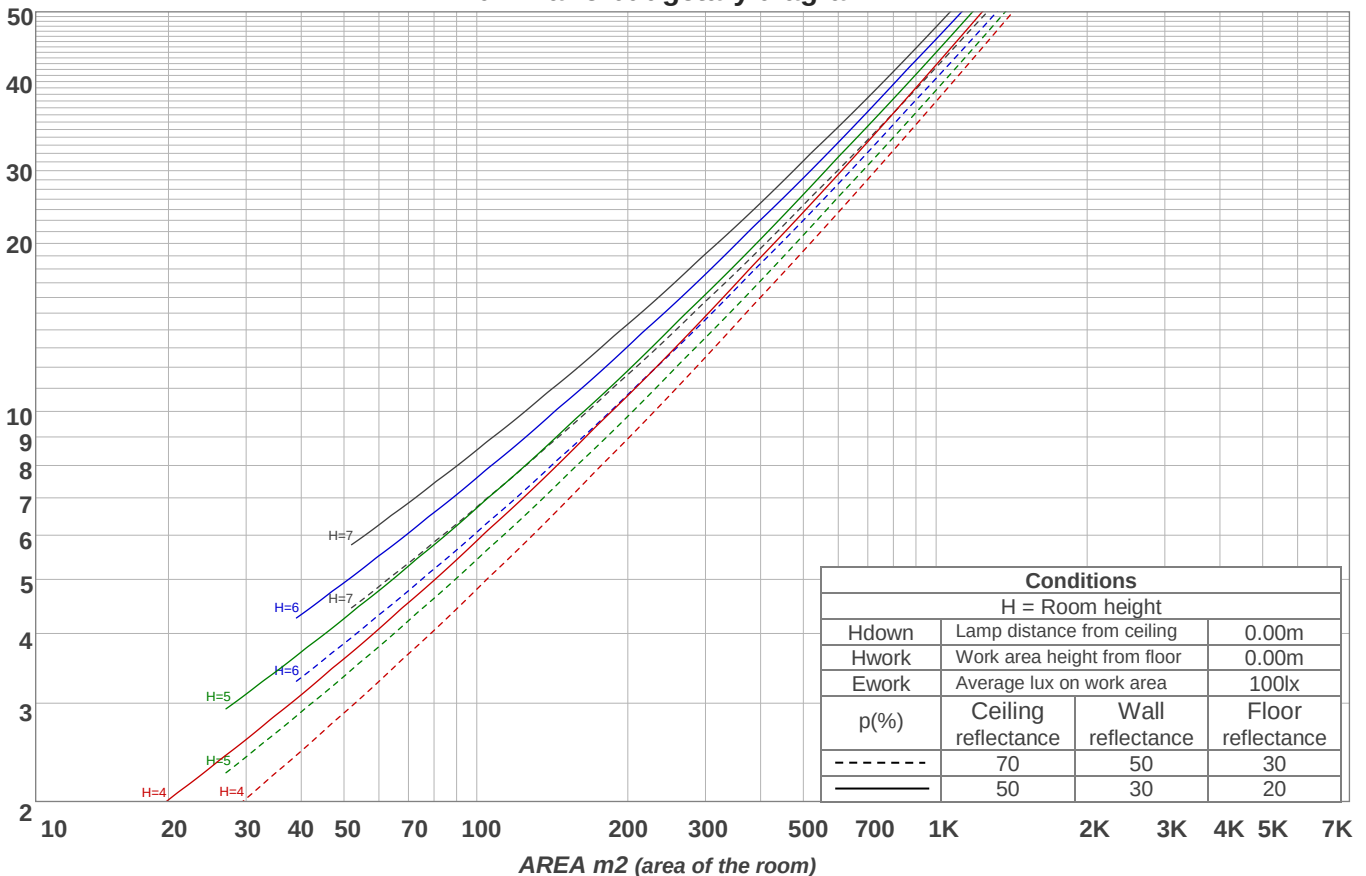


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
97.3 lm	279 lm	426 lm	518 lm	542 lm	494 lm	381 lm	225 lm	69.8 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
3.10 lm	0.984 lm	1.11 lm	1.06 lm	1.05 lm	0.788 lm	0.700 lm	0.444 lm	0.148 lm



Stabilization

Warmup curve

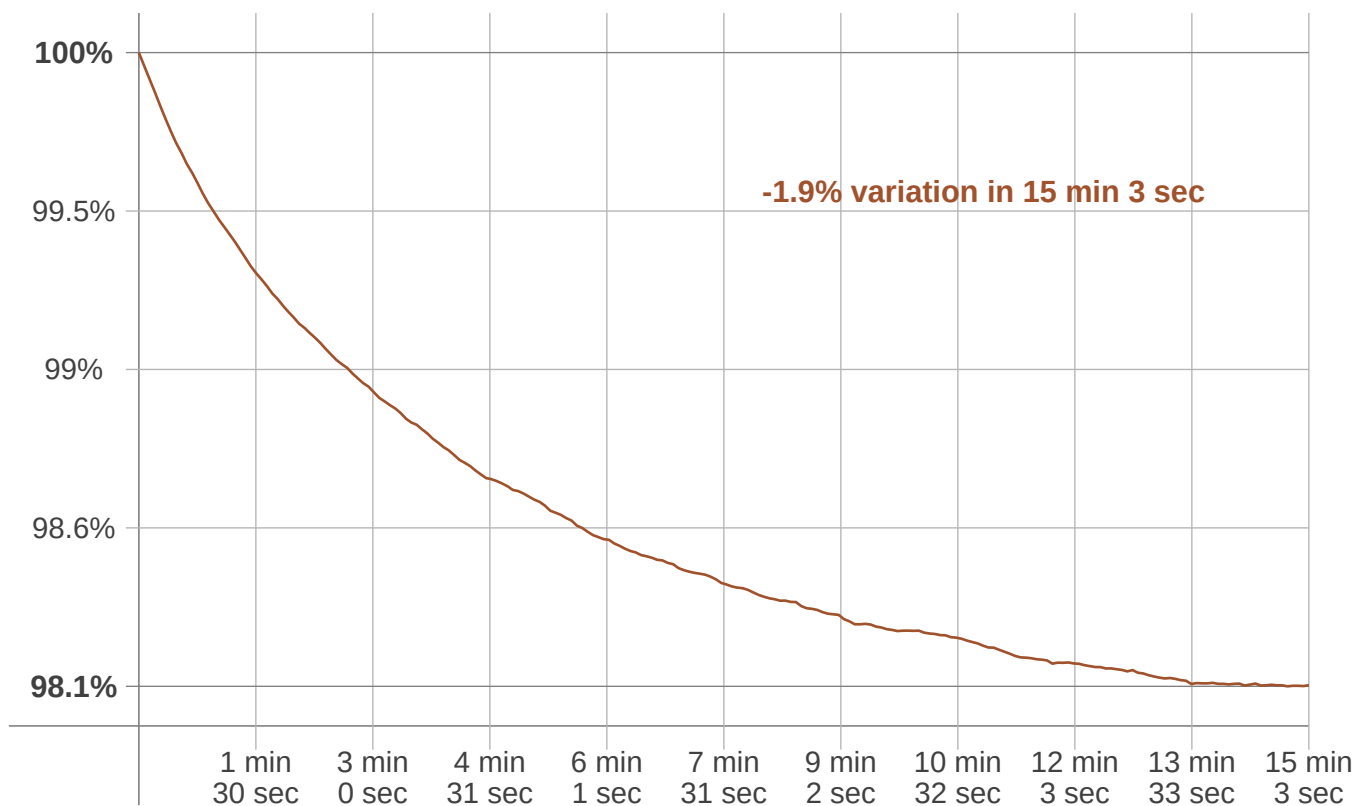

Warmup result

Warmup time:	15 min 3 sec
Warmup variation	-1.9%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
3834 K	+22 K	3856 K


Output change

Output start	Output change	Output end
3098 lm	-56 lm	3042 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

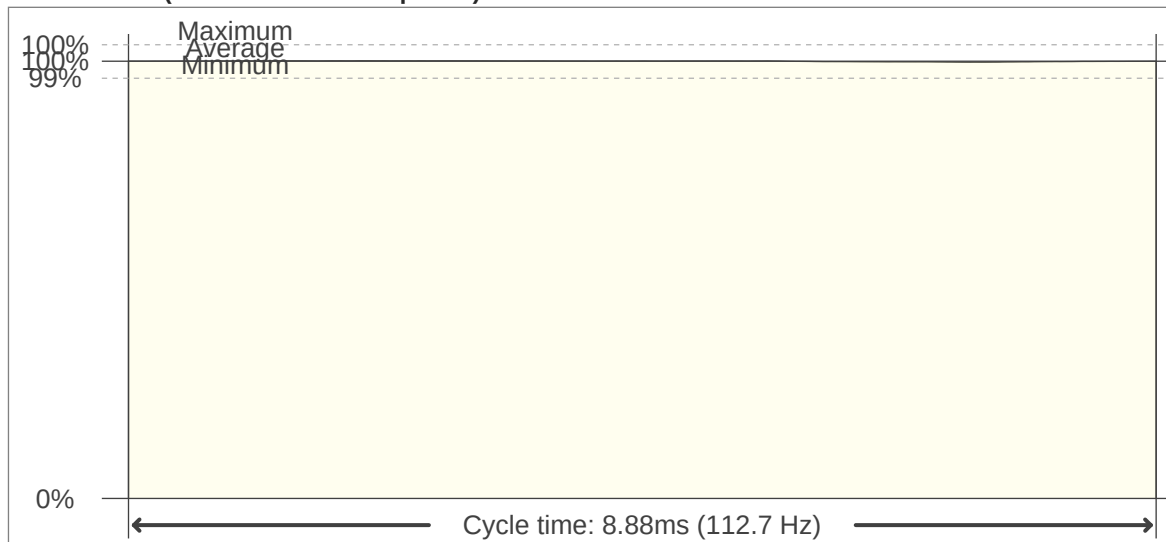

Flicker FFT (frequency scope of flicker curve)

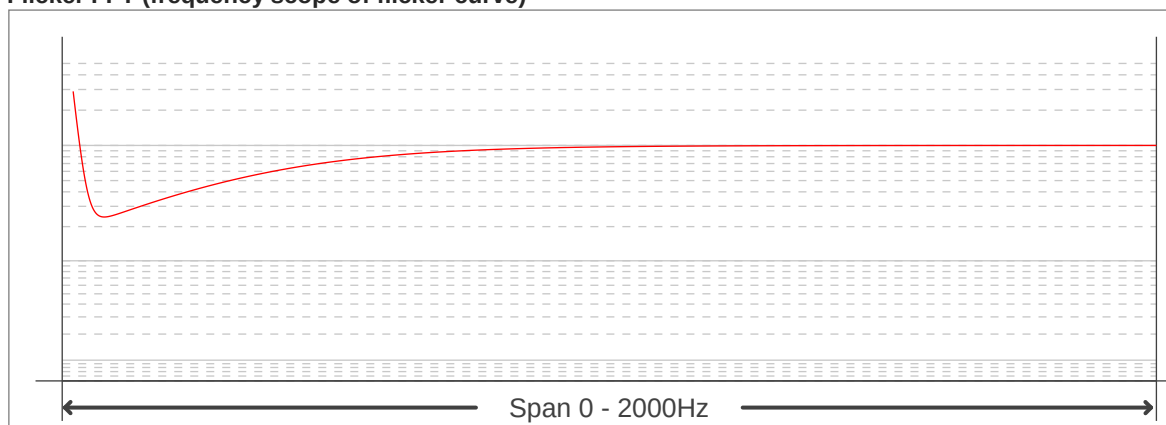

Flicker results:

Flicker frequency:	112.68 Hz
Flicker index:	0
Flicker percentage:	0.2 %
SVM: (Visual flicker)	0

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

