

Light efficiency:

126 Lumen/Watt

Output: 19168 lm

Light quality:

CRI: 81.9


Peak: 6154 cd

Color temperature:

5153 K

Power: 151.7 W

PF: 1.0

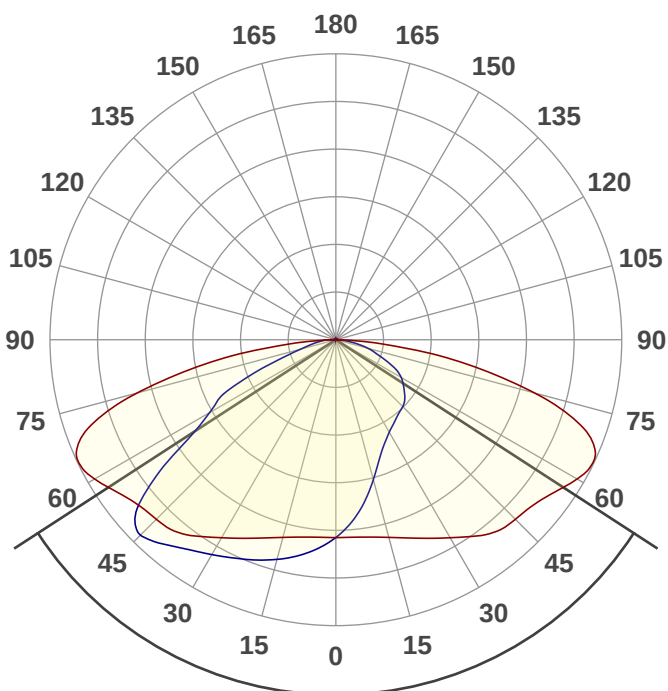

Product name:

PLLD-50K150

Date and time:

4/26/2019 10:49:37 AM

Beam angle

114°




CIE 1931


x: 0.341

y: 0.347

Spectra

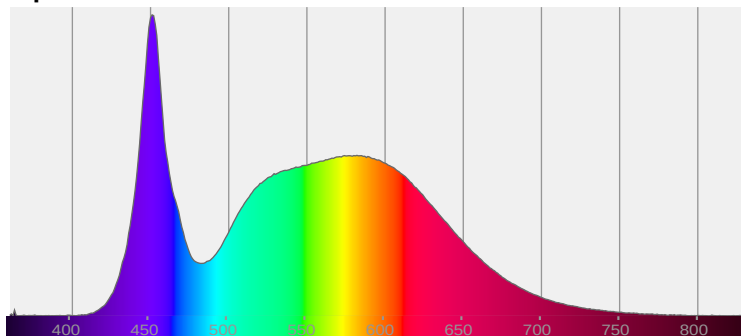

Power

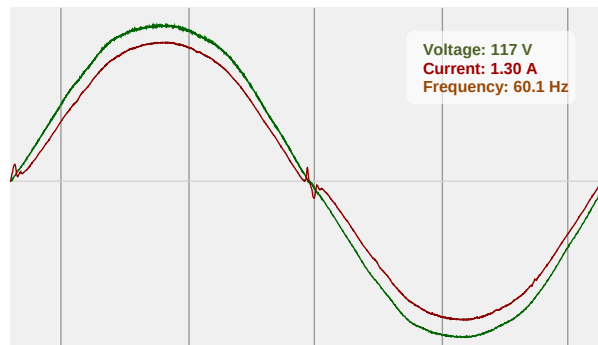



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

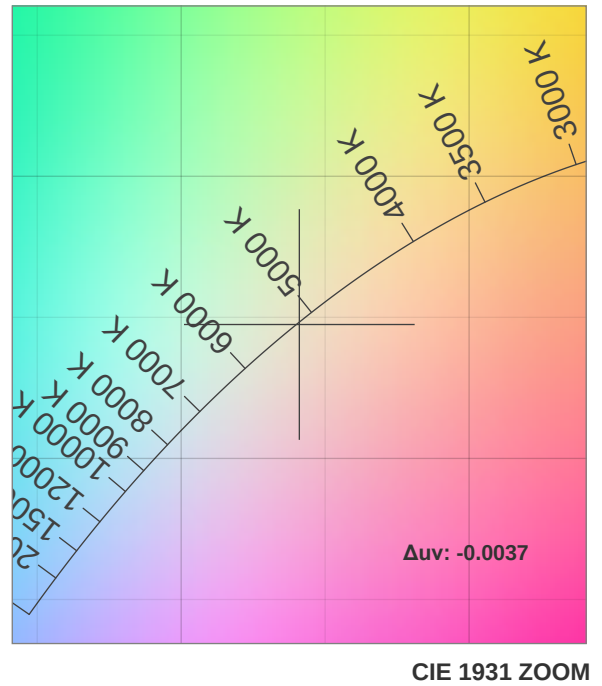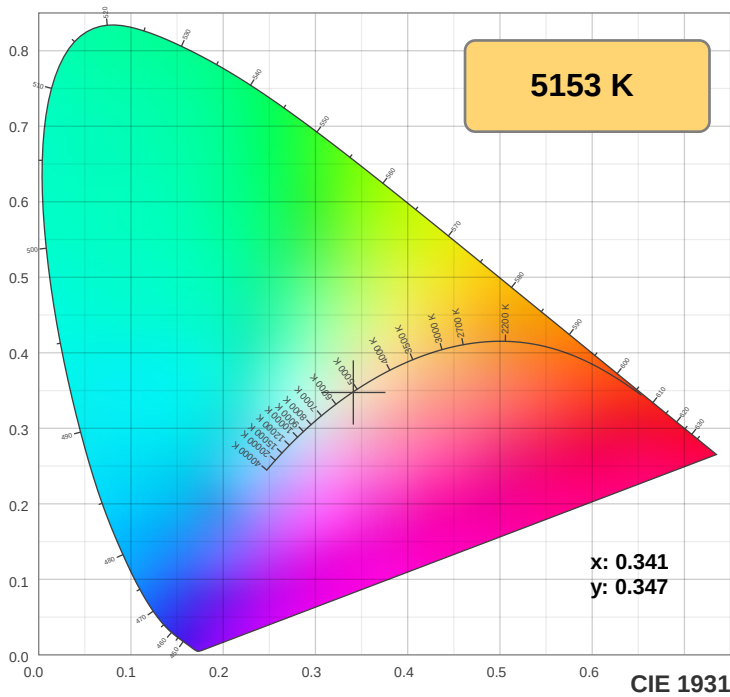

TM30: 79.4

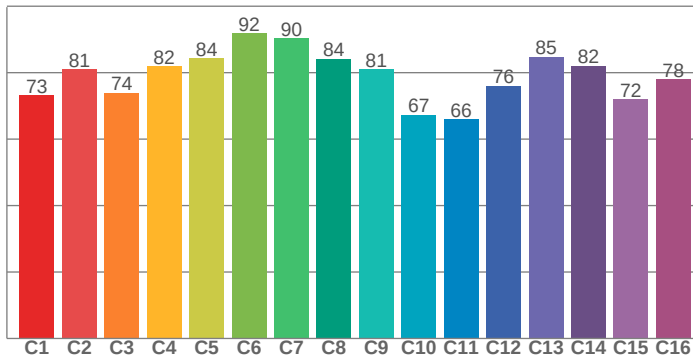

CRI: 81.9 (R1-R8)

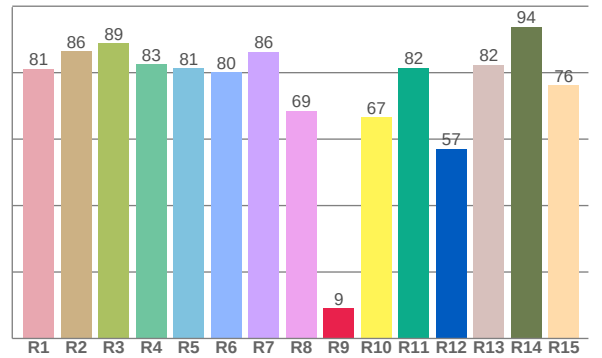

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81.1	86.4	88.9	82.6	81.3	80.2	86.3	68.5	9.1	66.5	81.5	57.1	82.4	93.8	76.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
73.1	81.0	73.9	81.9	84.3	91.8	90.4	84.1	81.0	67.3	65.9	76.0	84.9	82.0	72.0	78.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
83.6	96.5	70.8	67.9	76.8	80.9	83.9	88.8	94.0	81.5	77.4	77.3	78.7	70.0	75.1

CQS: 78.7

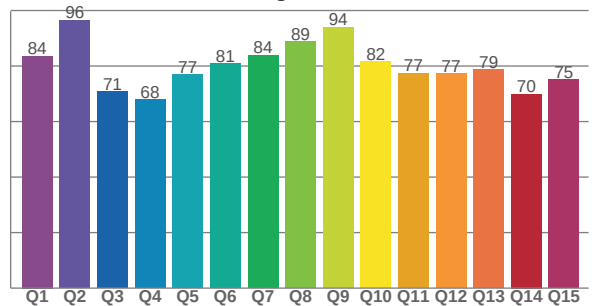

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5153 K	81.9	9.1	79.4	95.7	78.7	0.341	0.347	0.210	0.321	-0.0037



T 314.743.3067

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/

TM30 Report







Rf 79.4

Fidelity index Rf

Rg 95.7

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	73	-13%	-1%
2	81	-8%	6%
3	74	-4%	12%
4	82	0%	10%
5	84	2%	6%
6	92	3%	-1%
7	90	-3%	-4%
8	84	-8%	-1%
9	81	-11%	10%
10	67	-7%	17%
11	66	1%	20%
12	76	6%	11%
13	85	10%	-2%
14	82	6%	-7%
15	72	1%	-19%
16	78	-3%	-12%

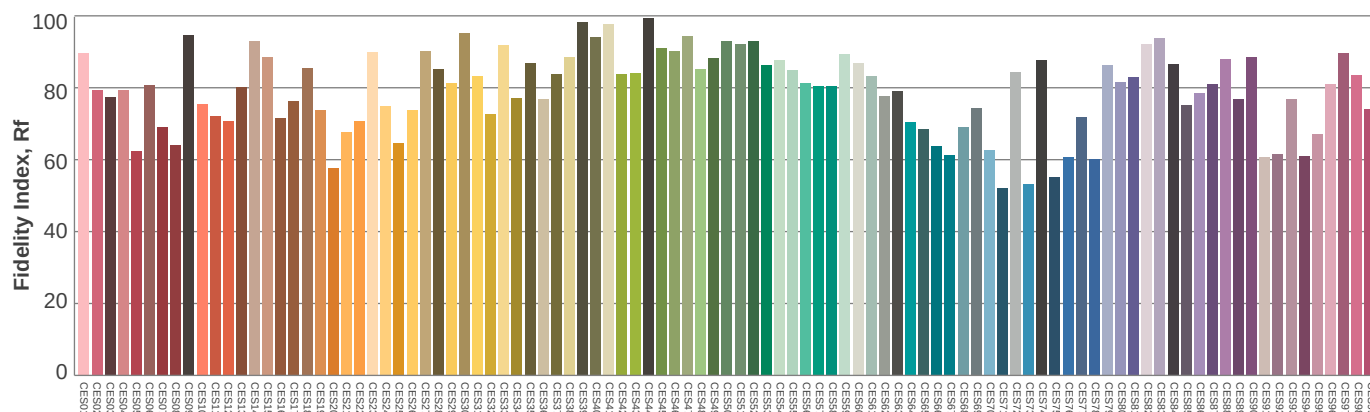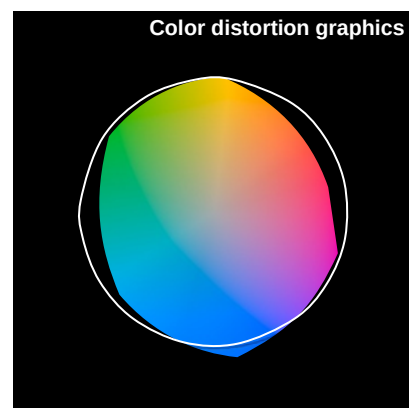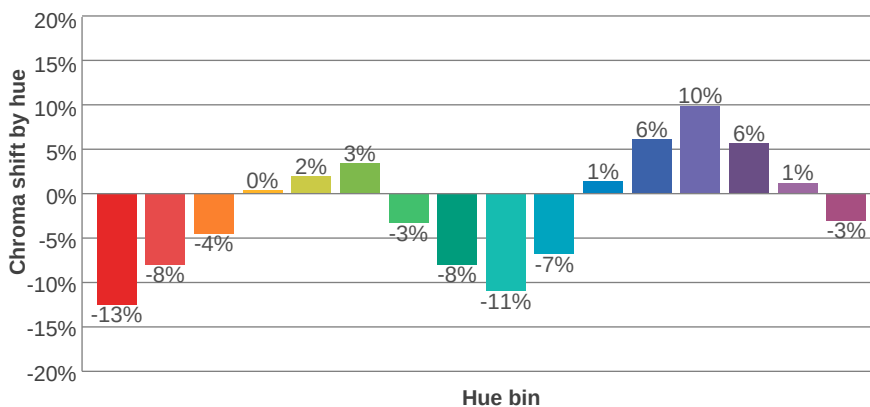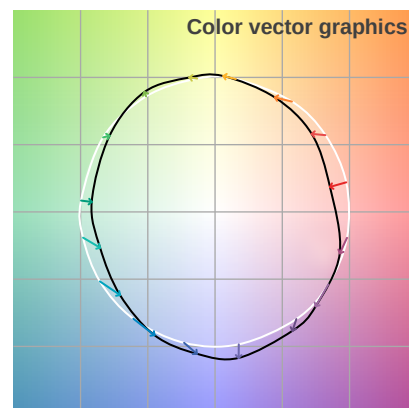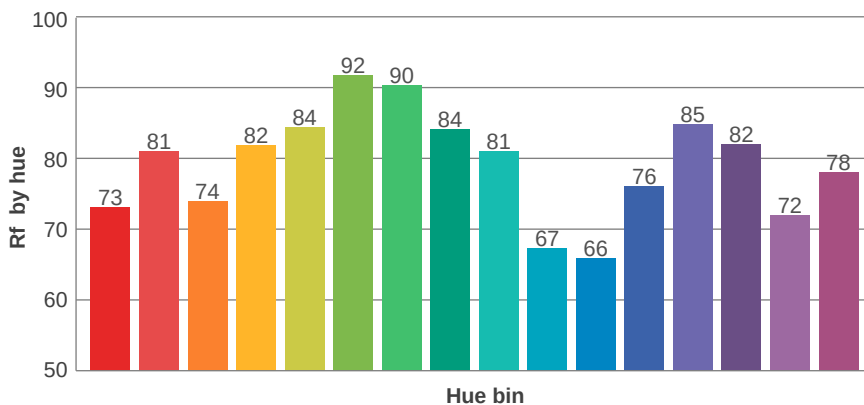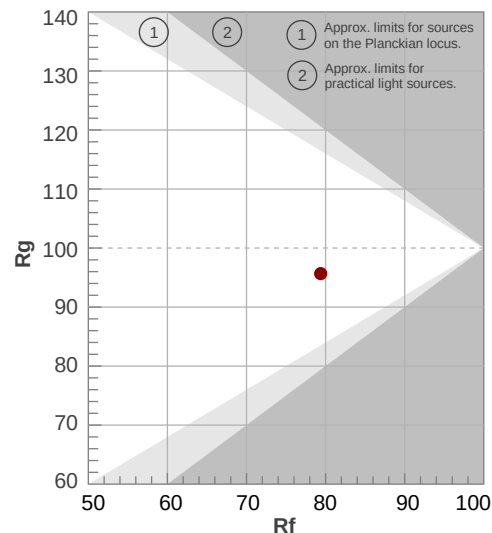

Color Evaluation Sample



Illumination

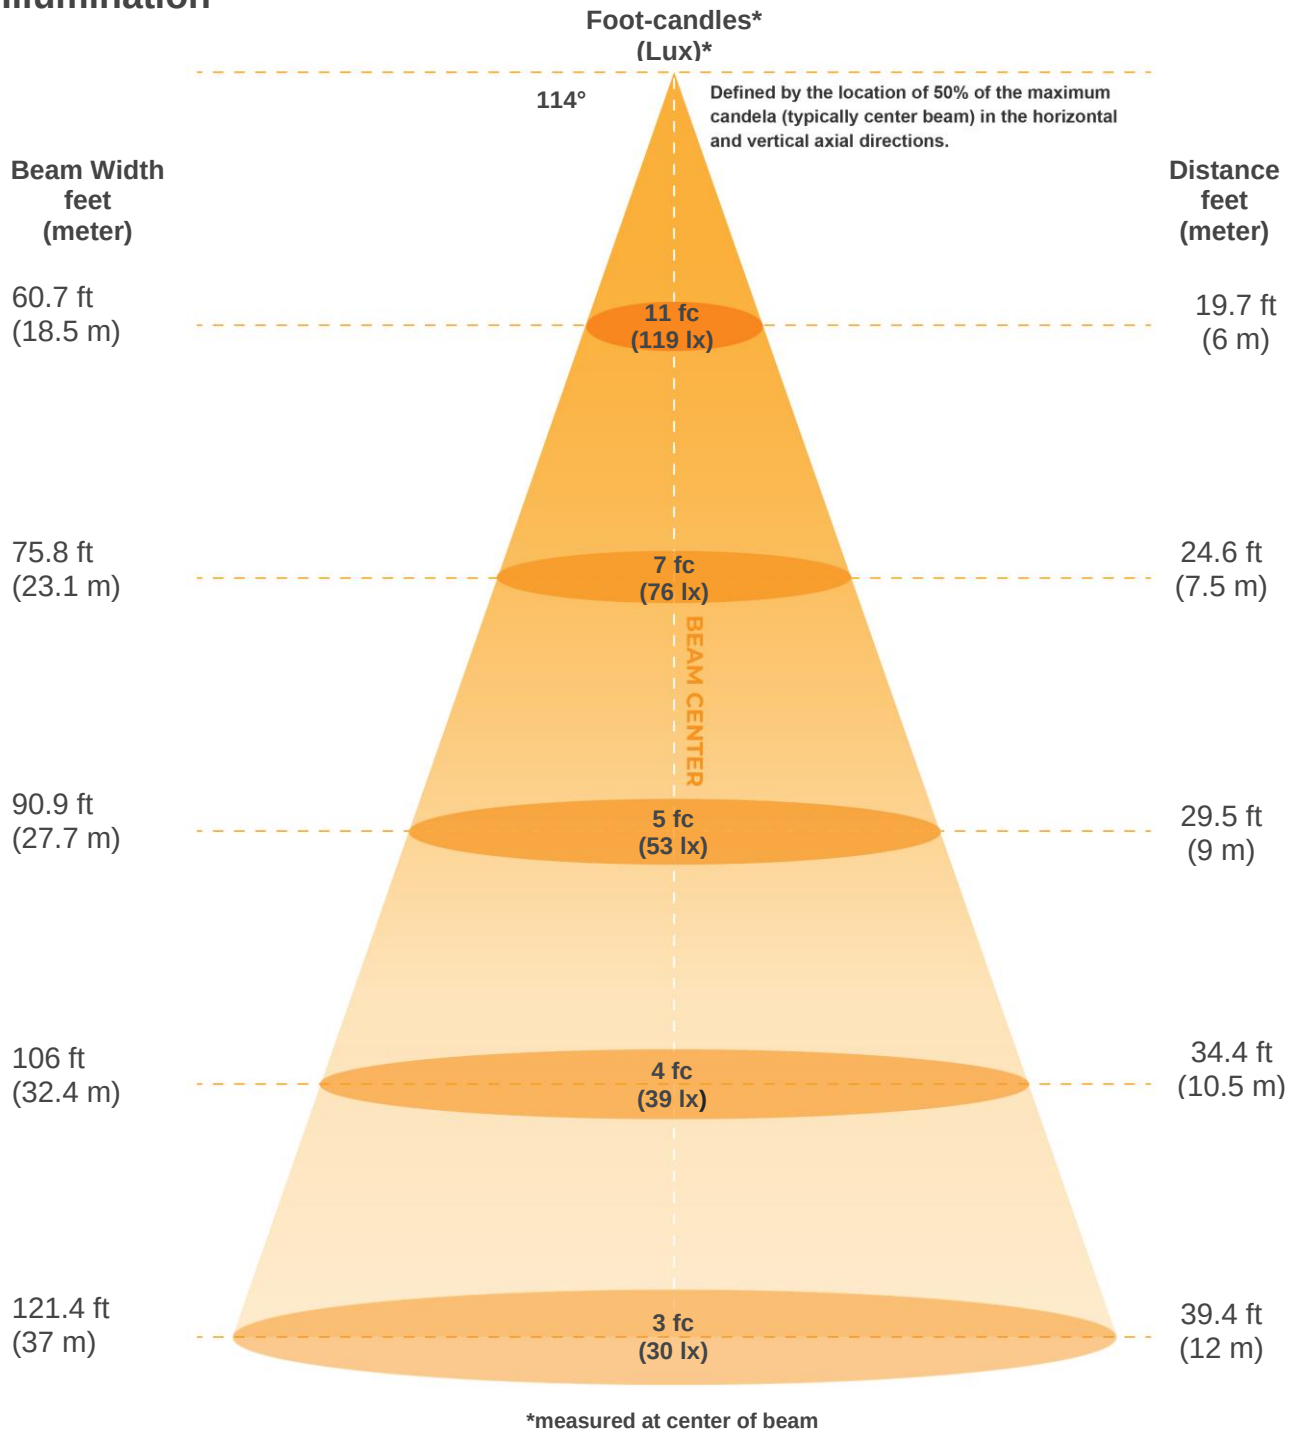

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
4279lx	1070lx	475lx	267lx	171lx	119lx	87lx	67lx	53lx	43lx	35lx	30lx	25lx	22lx	19lx	17lx	15lx	13lx	12lx	11lx
397.6fc	99.4fcd	44.2fcd	24.8fcd	15.9fcd	11fcd	8.1fcd	6.2fcd	4.9fcd	4fcd	3.3fcd	2.8fcd	2.4fcd	2fcd	1.8fcd	1.6fcd	1.4fcd	1.2fcd	1.1fcd	1fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
114°	162.9°	176.3°	69.2%	41.4%



ISO Diagrams

ISO candela diagram

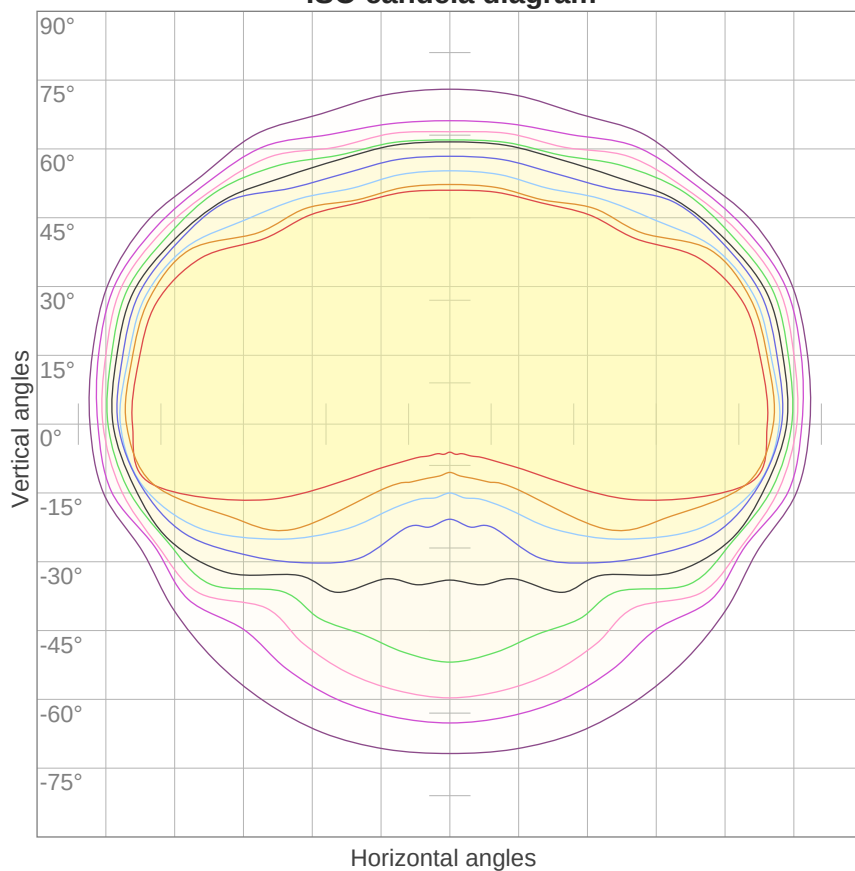


10%	428 cd
20%	856 cd
30%	1284 cd
40%	1712 cd
50%	2140 cd
60%	2568 cd
70%	2996 cd
80%	3423 cd
90%	3851 cd

Conditions:

Number of c-planes: 16

Candela at center: 4279 cd

ISO lux diagram

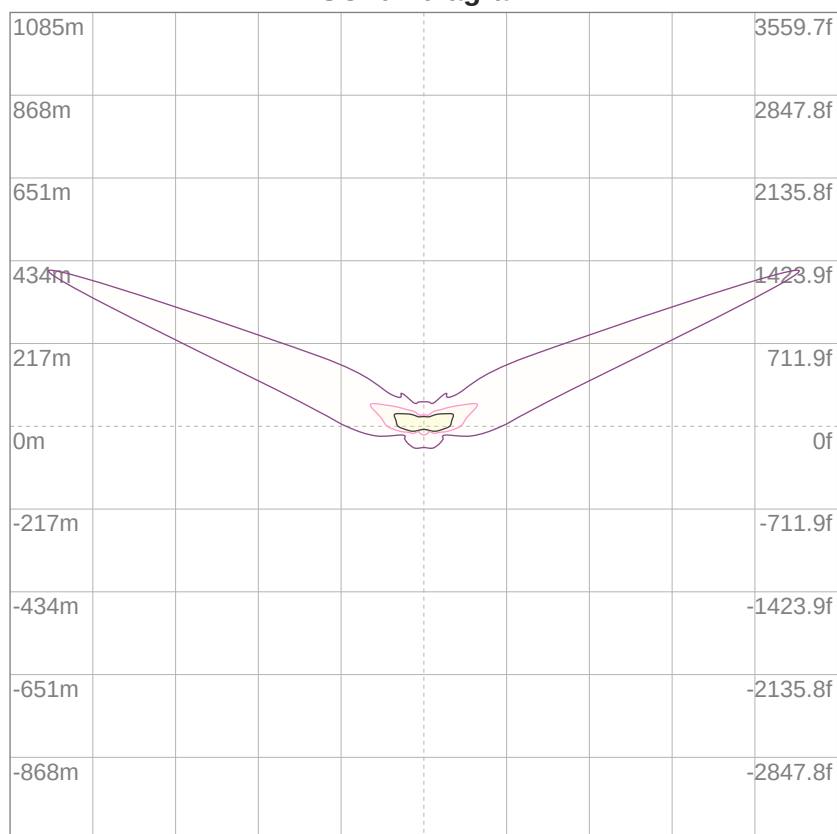

3%	1.28 lx
5%	2.14 lx
10%	4.28 lx
30%	12.8 lx
50%	21.4 lx

Conditions:

Number of c-planes: 16

Lux at center: 42.8 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	107	101	96	92	104	99	94	90	94	91	87	90	87	84	87	84	82	79
2	96	86	78	72	93	84	77	71	80	74	69	77	72	67	74	70	66	63
3	86	74	65	57	83	72	64	57	69	62	56	66	60	55	64	58	54	51
4	78	65	55	47	75	63	54	47	60	52	46	58	51	45	56	50	45	42
5	71	57	47	40	69	56	46	39	53	45	39	51	44	38	49	43	38	36
6	65	51	41	34	63	50	40	34	48	39	33	46	39	33	44	38	33	30
7	60	45	36	29	58	45	36	29	43	35	29	41	34	29	40	33	28	26
8	56	41	32	26	54	40	32	26	39	31	25	38	30	25	36	30	25	23
9	52	37	29	23	50	37	28	23	36	28	22	34	27	22	33	27	22	20
10	48	34	26	20	47	34	26	20	33	25	20	32	25	20	31	24	20	18

LAMPS (number of lamps)

Luminaire budgetary diagram

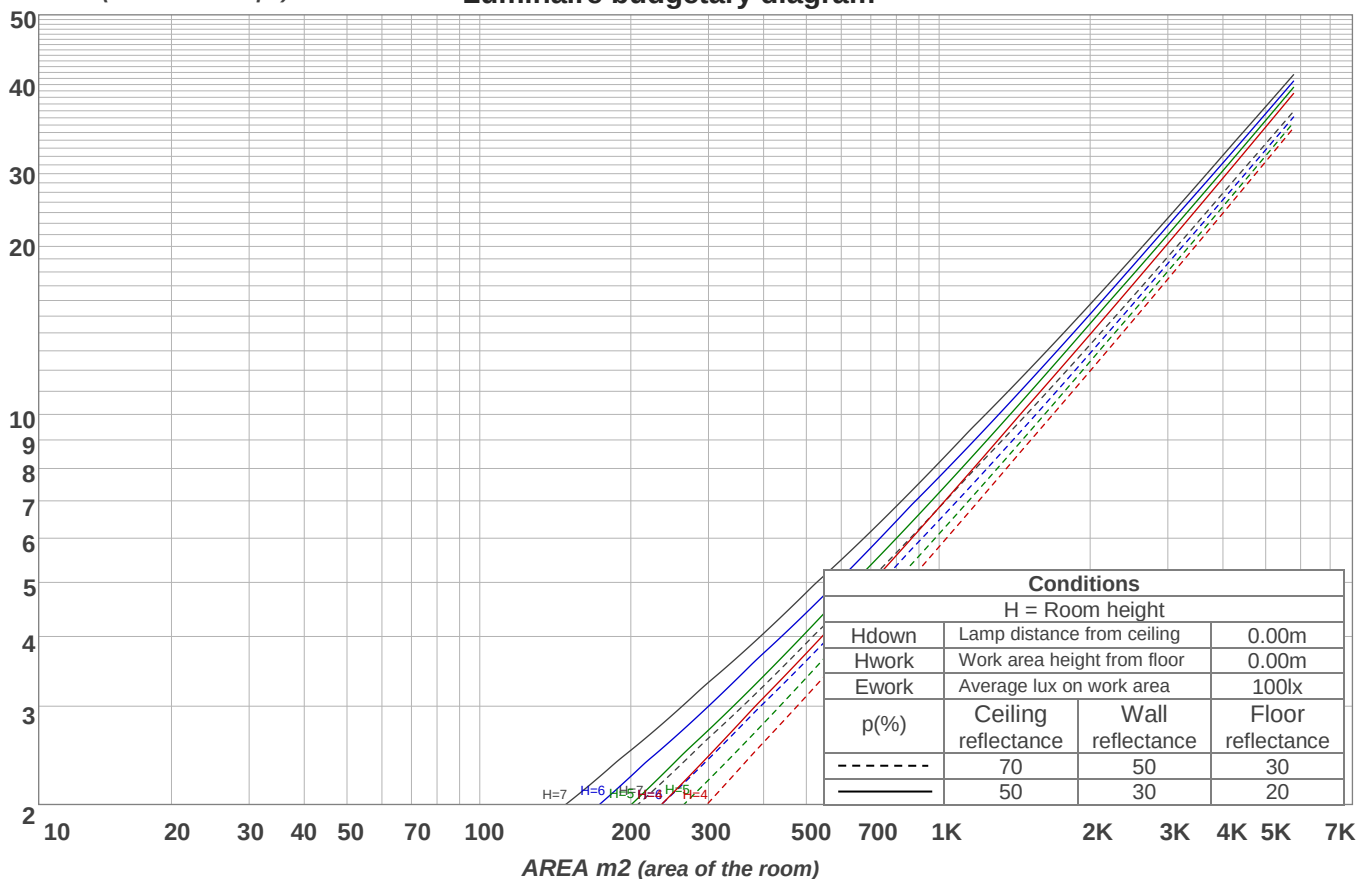

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
407 lm	1198 lm	1957 lm	2727 lm	3406 lm	3567 lm	3154 lm	2063 lm	627 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
15.3 lm	6.54 lm	7.65 lm	7.87 lm	7.55 lm	7.04 lm	5.33 lm	3.15 lm	1.07 lm




Road Report

LCS table


BUG rating:	B4 U2 G4	
Forward light	Lumens	Lumens %
Low(0-30):	1781.8	9.3%
Medium(30-60):	4852	25.3%
High(60-80):	2614.8	13.6%
Very high(80-90):	317	1.7%
Back light		
Low(0-30):	1781.8	9.3%
Medium(30-60):	4852	25.3%
High(60-80):	2614.8	13.6%
Very high(80-90):	317	1.7%
Uplight		
Low(90-100):	19.7	0.1%
High(100-180):	46.2	0.2%

LCS graph

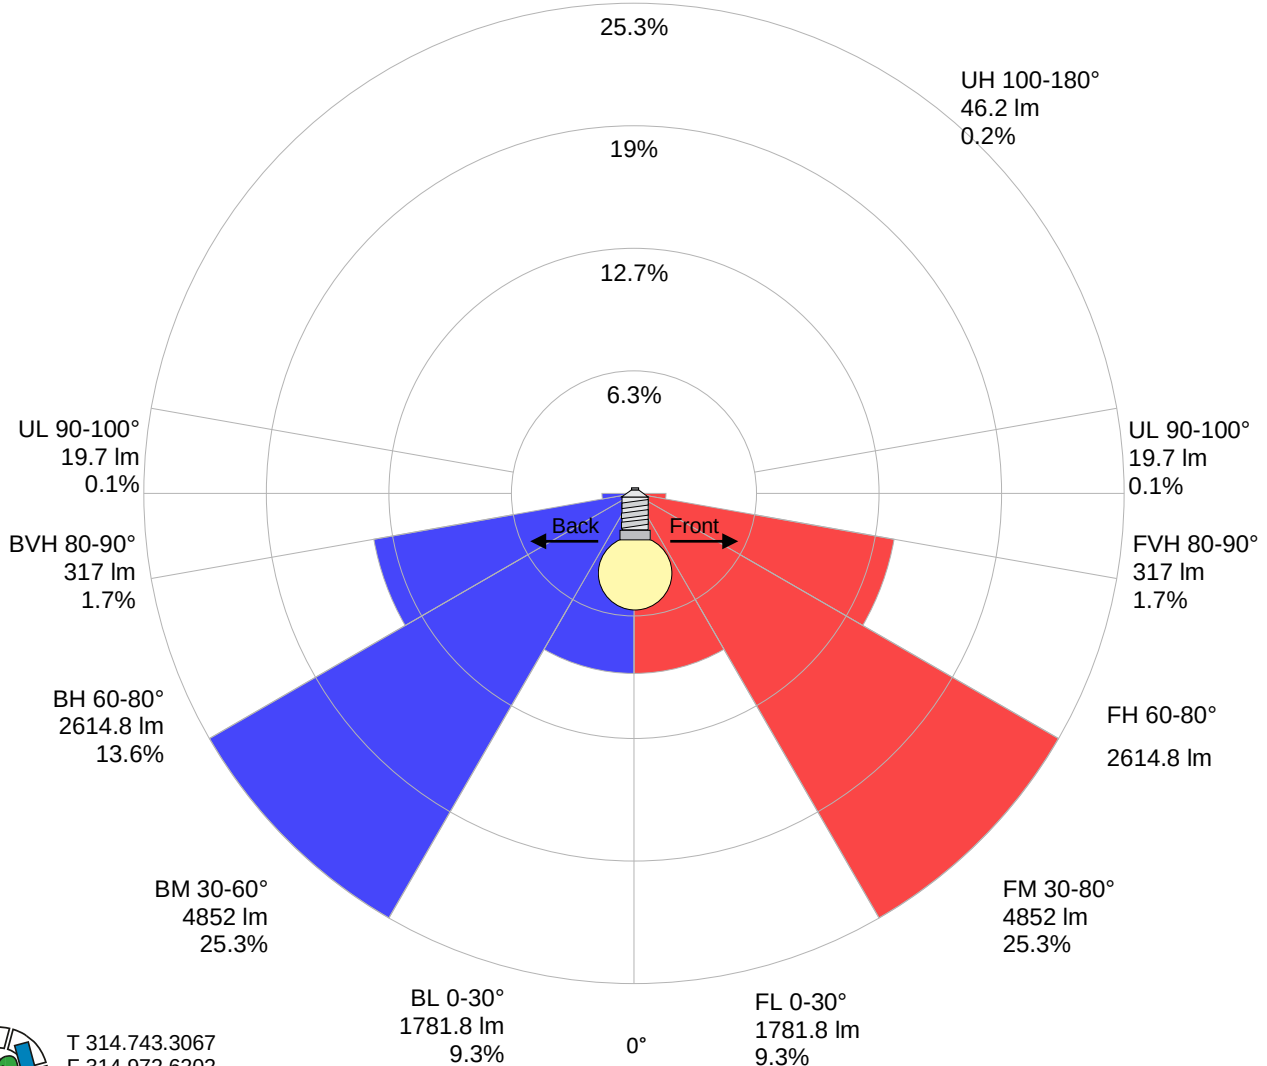

Stabilization

Warmup curve

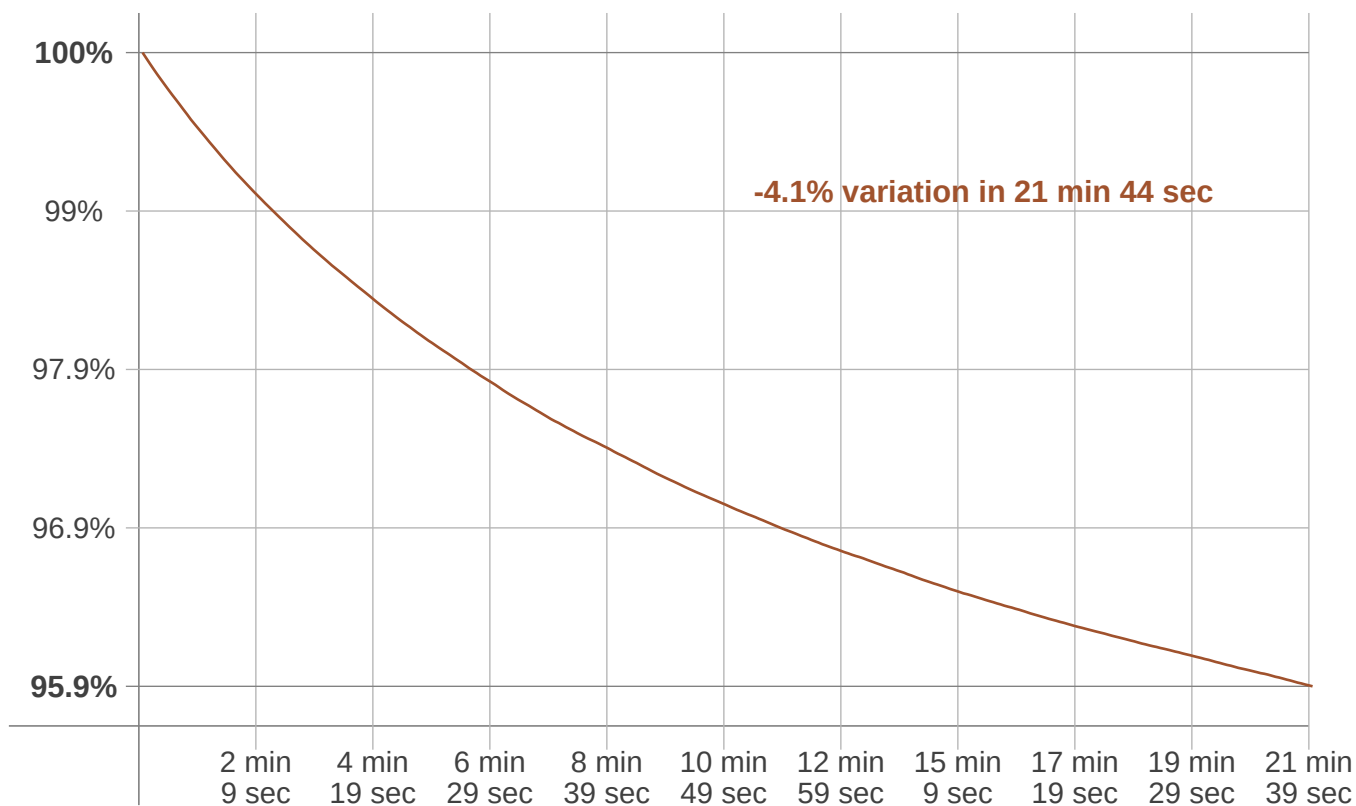

Warmup result

Warmup time:	21 min 44 sec
Warmup variation	-4.2%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5089 K	+64 K	5153 K

Output change

Output start	Output change	Output end
19977 lm	-810 lm	19168 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

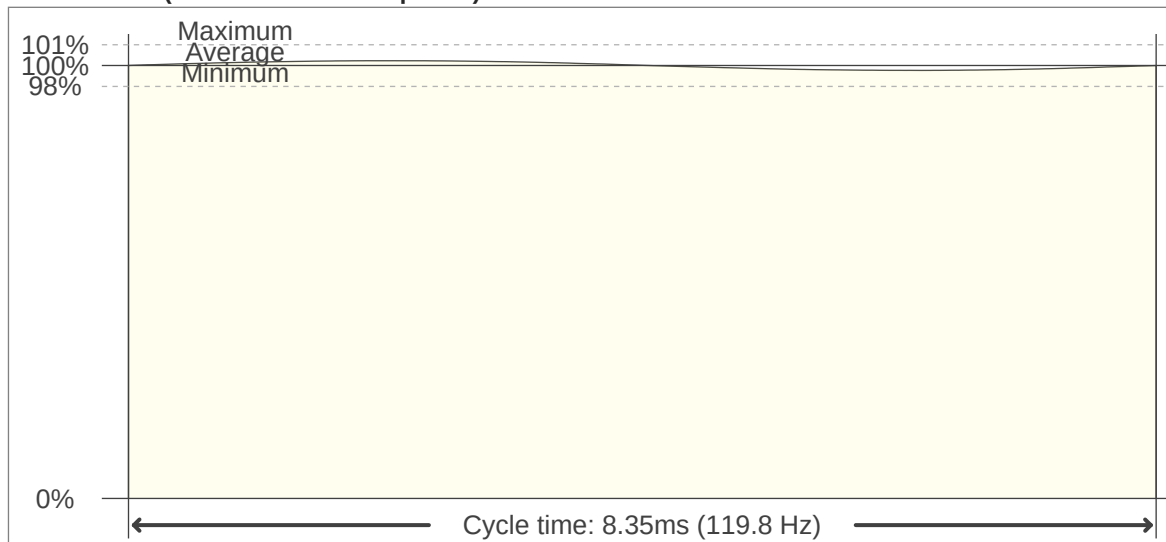

Flicker FFT (frequency scope of flicker curve)

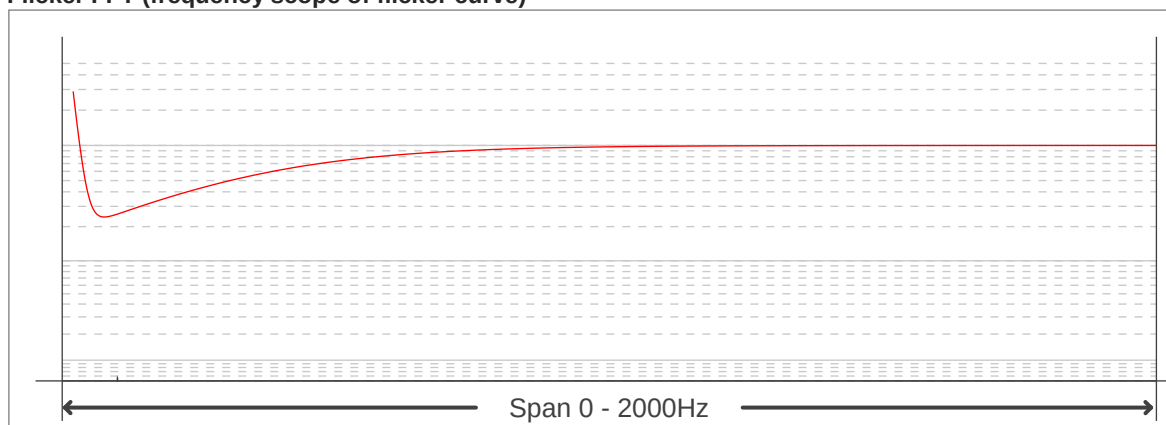

Flicker results:

Flicker frequency:	119.76 Hz
Flicker index:	0
Flicker percentage:	1.14 %
SVM: (Visual flicker)	0.04

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

