

Light efficiency:

130 Lumen/Watt

Light quality:

CRI: 82.0

Color temperature:


4048 K

Output: 6309 lm

Peak: 2163 cd

Power: 48.6 W

PF: 1.0

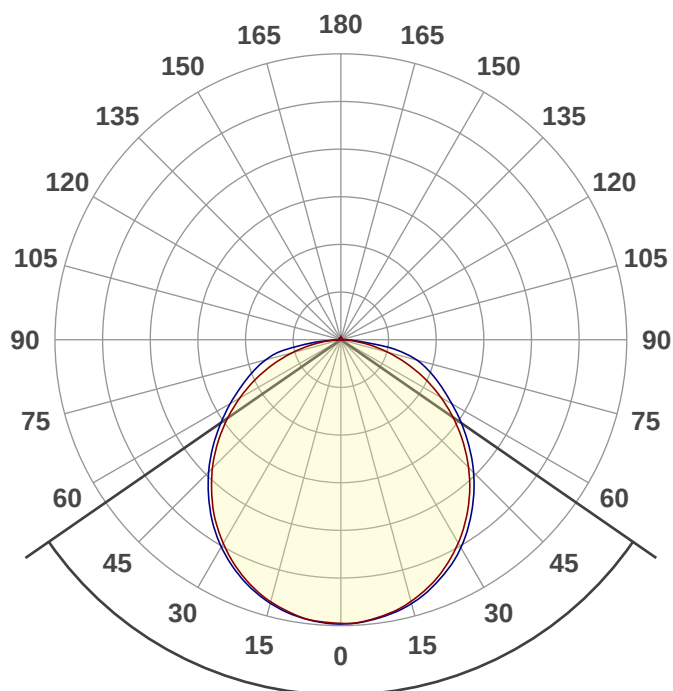

Beam angle **110.6°**

Product name:

TLFD-40K-24-50W-B

Date and time:

10/4/2019 10:47:14 AM




CIE 1931


x: 0.379

y: 0.376

Spectra

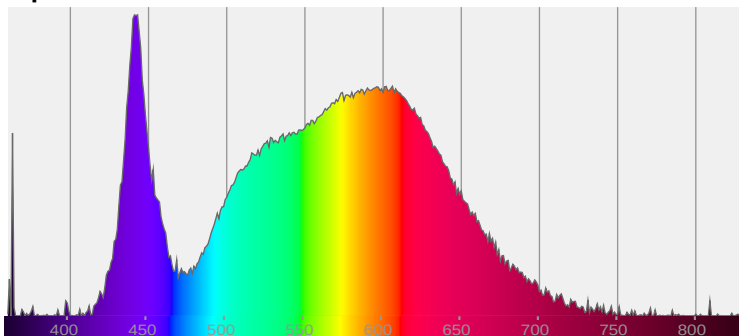

Power

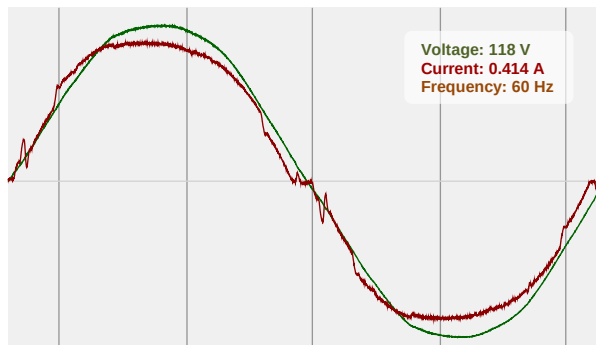



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

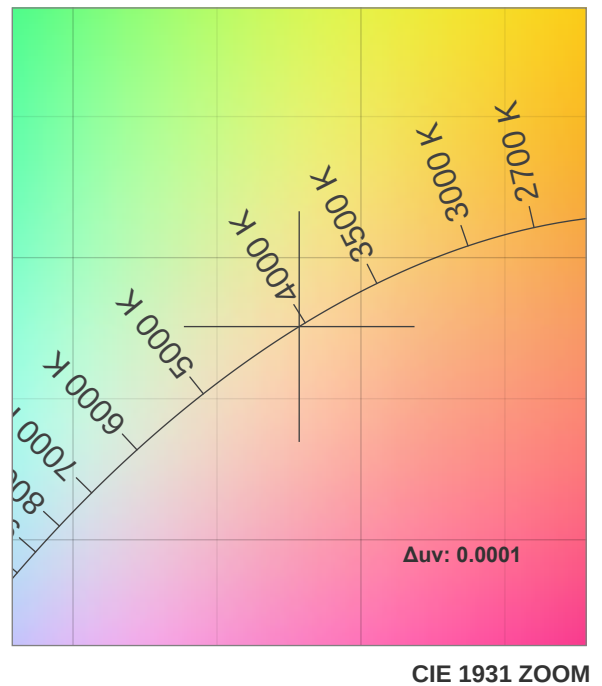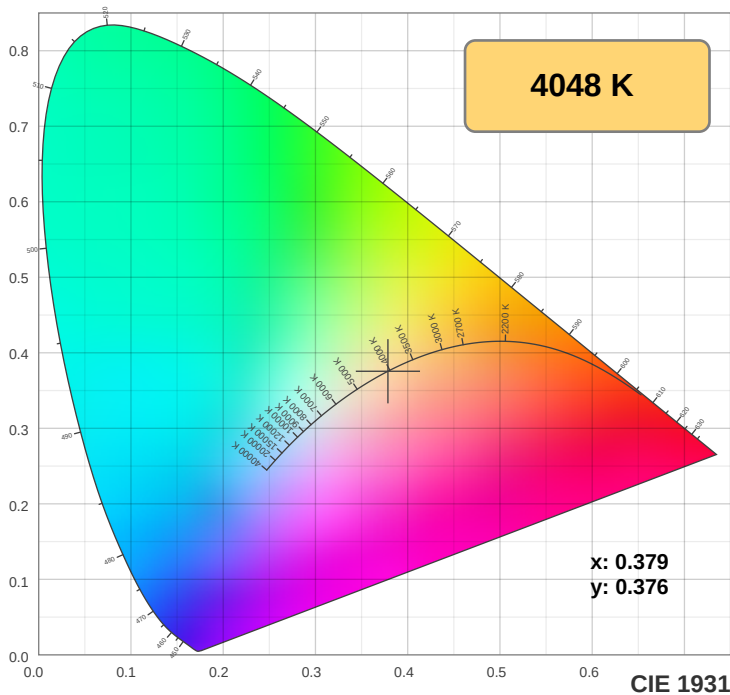

TM30: 80.2

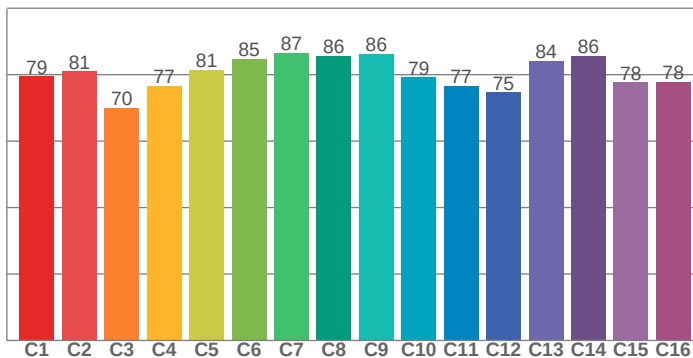

CRI: 82.0 (R1-R8)

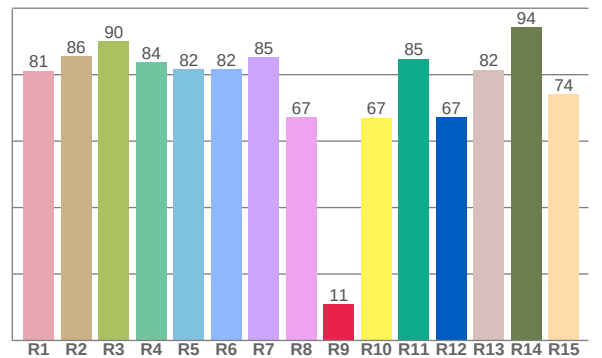

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81.2	85.6	90.1	83.7	81.6	81.6	85.2	67.1	11.0	67.0	84.8	67.3	81.5	94.4	74.1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79.4	80.9	70.0	76.6	81.4	84.8	86.6	85.6	86.3	79.2	76.7	74.7	84.1	85.7	77.7	77.8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
79.7	96.4	78.6	79.5	83.3	82.1	84.0	89.8	96.2	84.7	83.2	82.6	83.1	71.9	74.8

CQS: 82.1

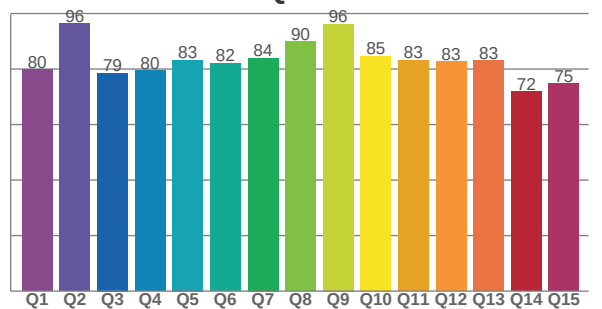

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4048 K	82.0	11.0	80.2	99.7	82.1	0.379	0.376	0.224	0.334	0.0001



TM30 Report







Rf 80.2

Fidelity index Rf


Rg 99.7

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	79	-11%	-3%
2	81	-8%	6%
3	70	-3%	14%
4	77	4%	12%
5	81	10%	8%
6	85	9%	-1%
7	87	3%	-7%
8	86	-3%	-8%
9	86	-7%	-5%
10	79	-10%	5%
11	77	-2%	13%
12	75	5%	12%
13	84	9%	-1%
14	86	9%	-4%
15	78	2%	-15%
16	78	-3%	-13%

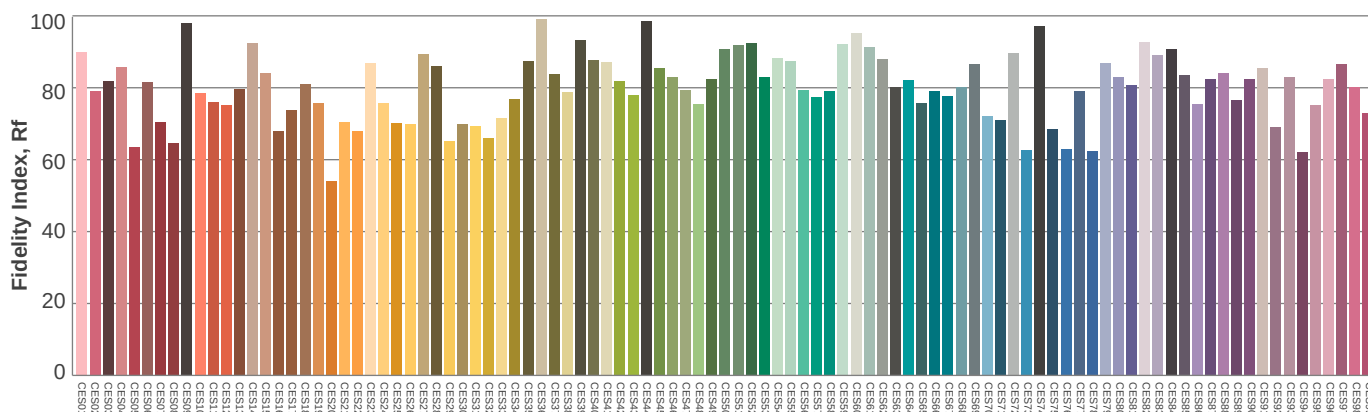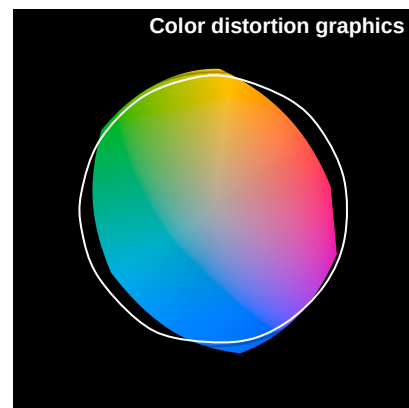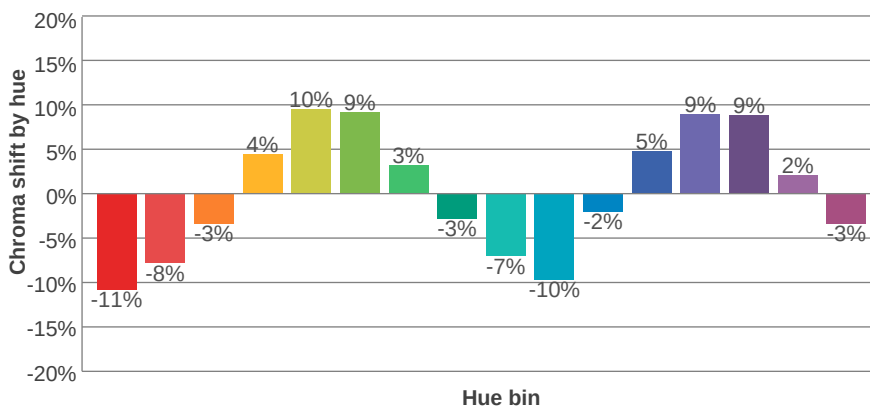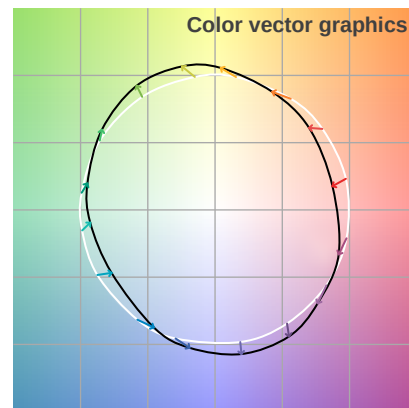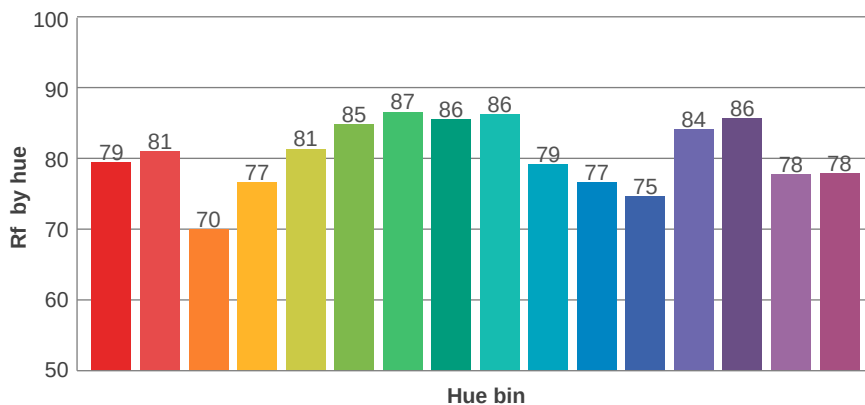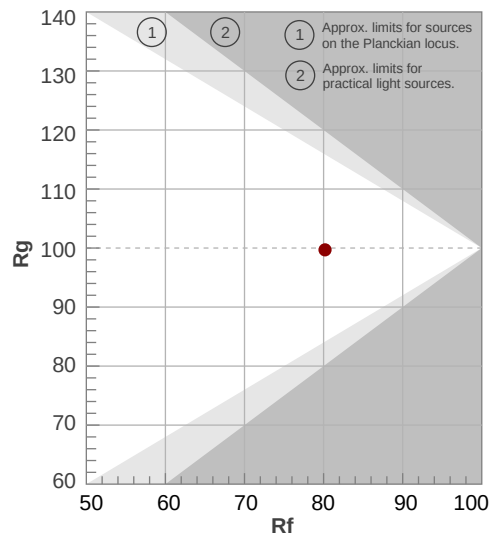

Illumination

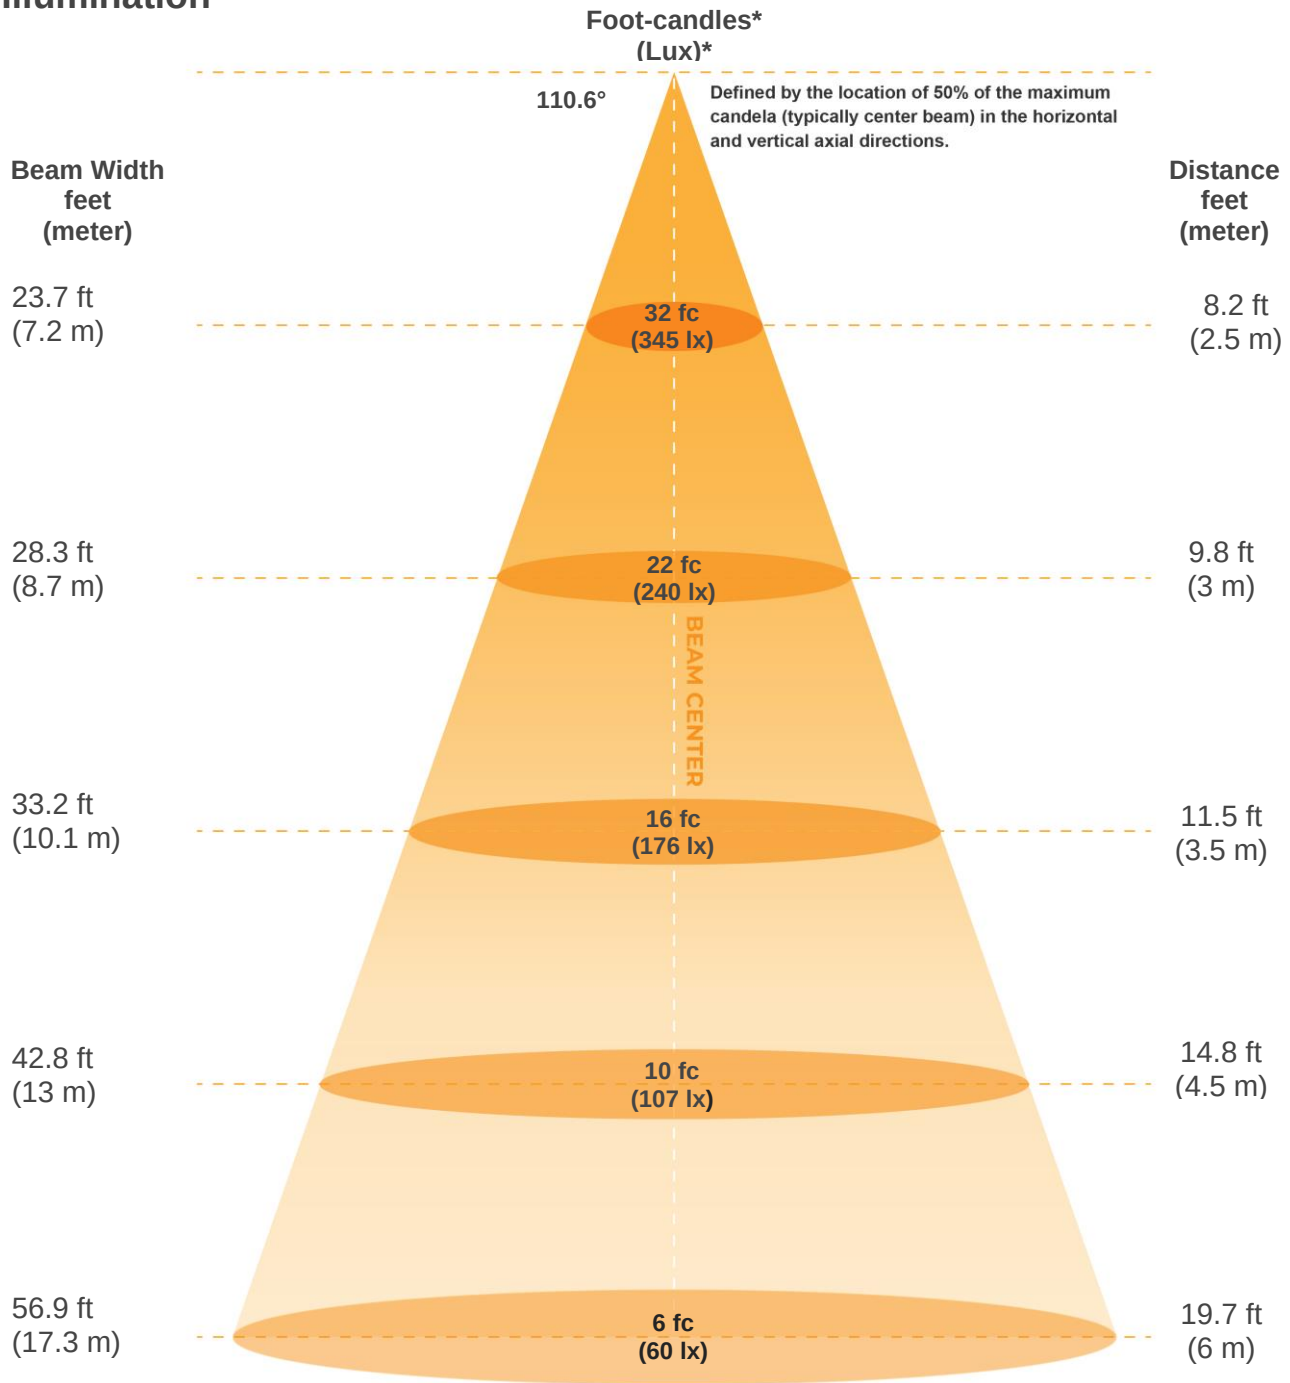

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2159lx	540lx	240lx	135lx	86lx	60lx	44lx	34lx	27lx	22lx	18lx	15lx	13lx	11lx	10lx	8lx	7lx	7lx	6lx	5lx
200.5fcd	50.1fcd	22.3fcd	12.5fcd	8fcd	5.6fcd	4.1fcd	3.1fcd	2.5fcd	2fcd	1.7fcd	1.4fcd	1.2fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.6fcd	0.5fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
110.6°	166.1°	176.4°	75.7%	51.8%



ISO Diagrams

ISO candela diagram

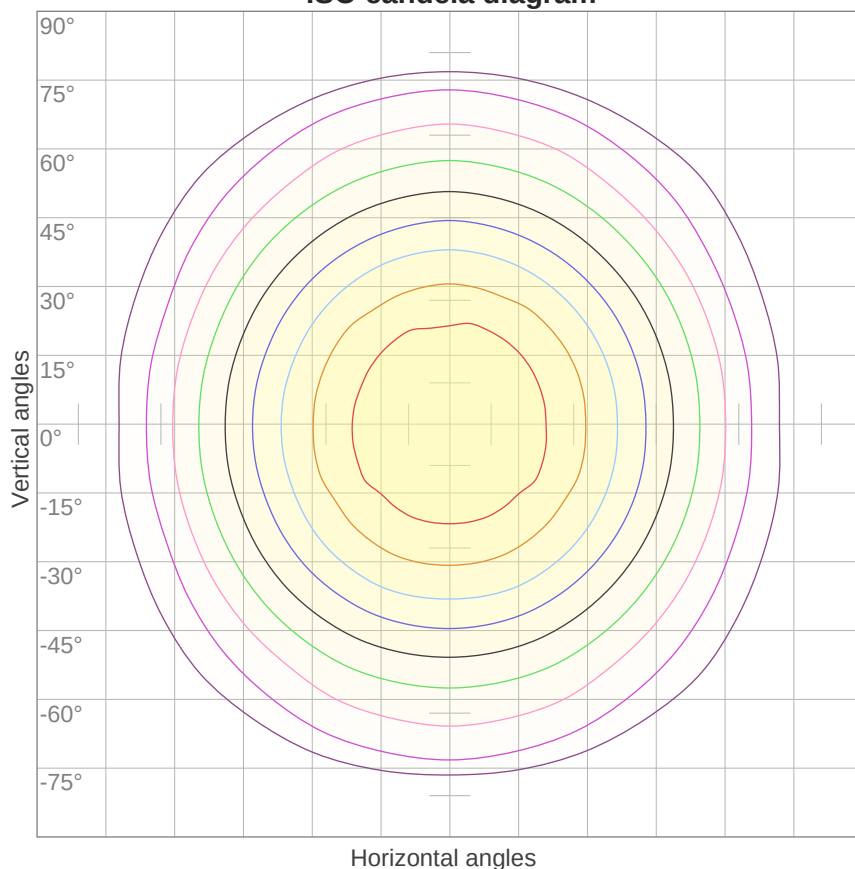


10%	216 cd
20%	432 cd
30%	648 cd
40%	863 cd
50%	1079 cd
60%	1295 cd
70%	1511 cd
80%	1727 cd
90%	1943 cd

Conditions:

Number of c-planes: 16

Candela at center: 2159 cd

ISO lux diagram

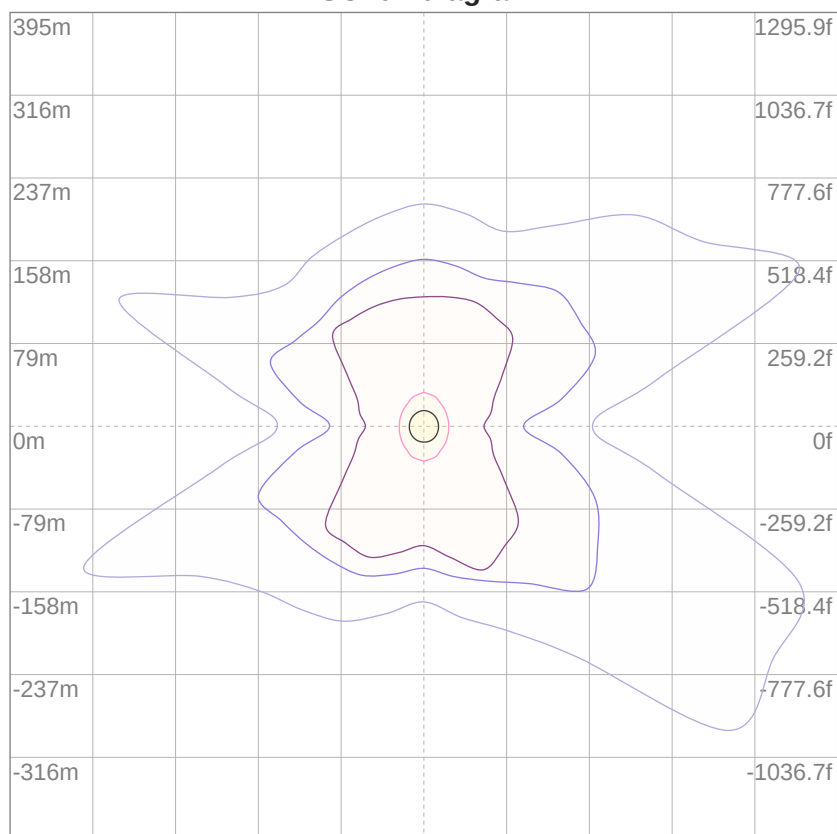

3%	0.648 lx
5%	1.08 lx
10%	2.16 lx
30%	6.48 lx
50%	10.8 lx

Conditions:

Number of c-planes: 16

Lux at center: 21.6 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	103	98	94	105	100	96	93	96	93	89	92	89	87	88	86	84	82
2	98	89	82	76	95	87	81	75	83	78	73	80	75	71	77	73	70	67
3	89	78	70	63	86	77	69	62	73	67	61	70	65	60	68	63	59	57
4	81	69	60	53	79	68	59	53	65	58	52	63	56	51	60	55	50	48
5	75	62	53	46	73	61	52	46	58	51	45	56	50	44	54	48	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	38	36
7	64	50	42	35	62	50	41	35	48	40	35	46	40	34	45	39	34	32
8	60	46	37	31	58	45	37	31	44	36	31	42	36	31	41	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23

LAMPS (number of lamps)

Luminaire budgetary diagram

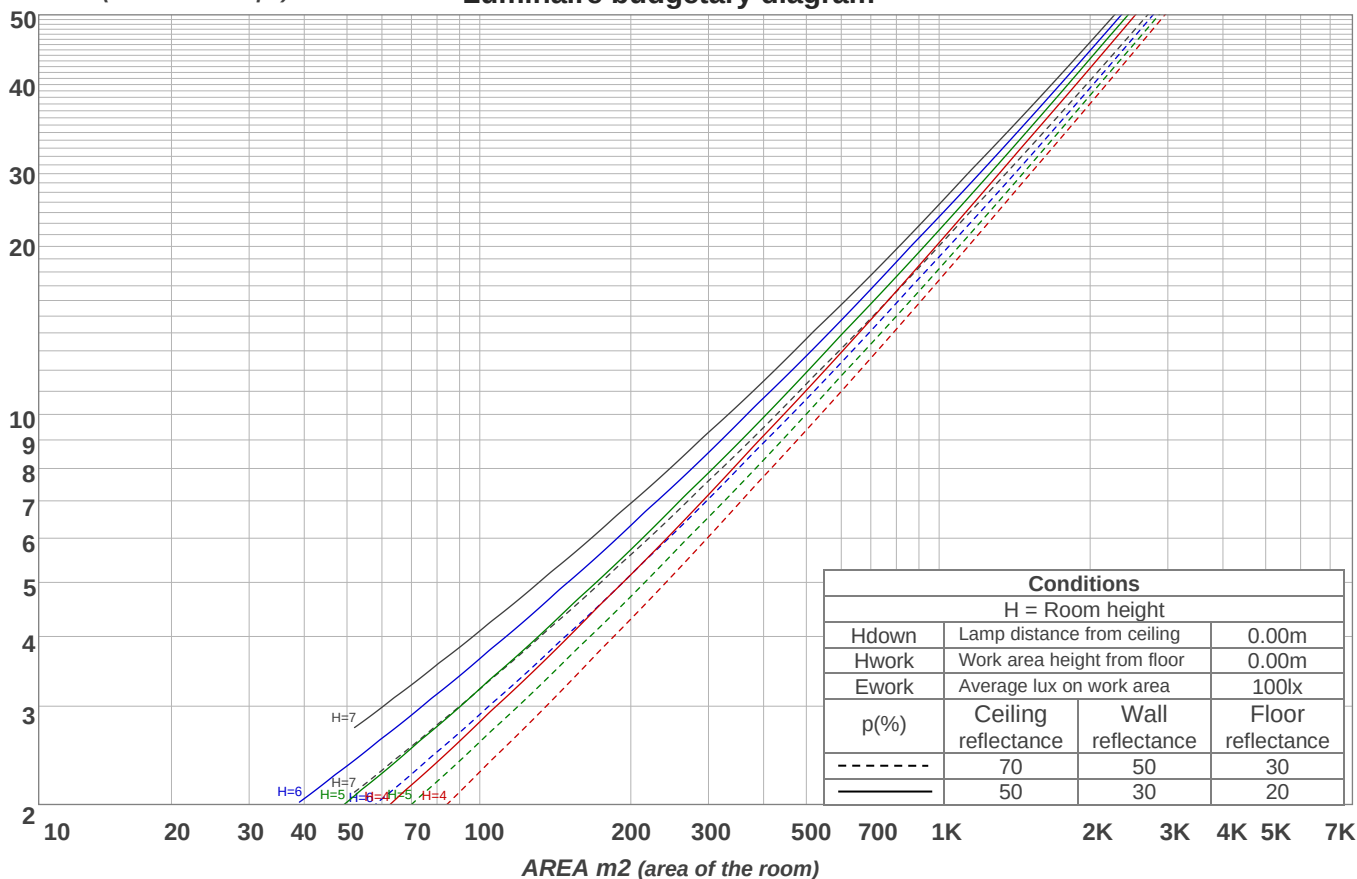

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
204 lm	584 lm	881 lm	1053 lm	1081 lm	973 lm	769 lm	516 lm	177 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
12.4 lm	10.5 lm	9.91 lm	9.75 lm	8.73 lm	7.45 lm	5.74 lm	3.51 lm	1.21 lm




Road Report

LCS table


BUG rating:	B2 U3 G2	
Forward light	Lumens	Lumens %
Low(0-30):	833.6	13.2%
Medium(30-60):	1551.3	24.6%
High(60-80):	639.7	10.1%
Very high(80-90):	86.7	1.4%
Back light		
Low(0-30):	834.2	13.2%
Medium(30-60):	1557.2	24.7%
High(60-80):	645.5	10.2%
Very high(80-90):	90.7	1.4%
Uplight		
Low(90-100):	12.6	0.2%
High(100-180):	56.7	0.9%

LCS graph

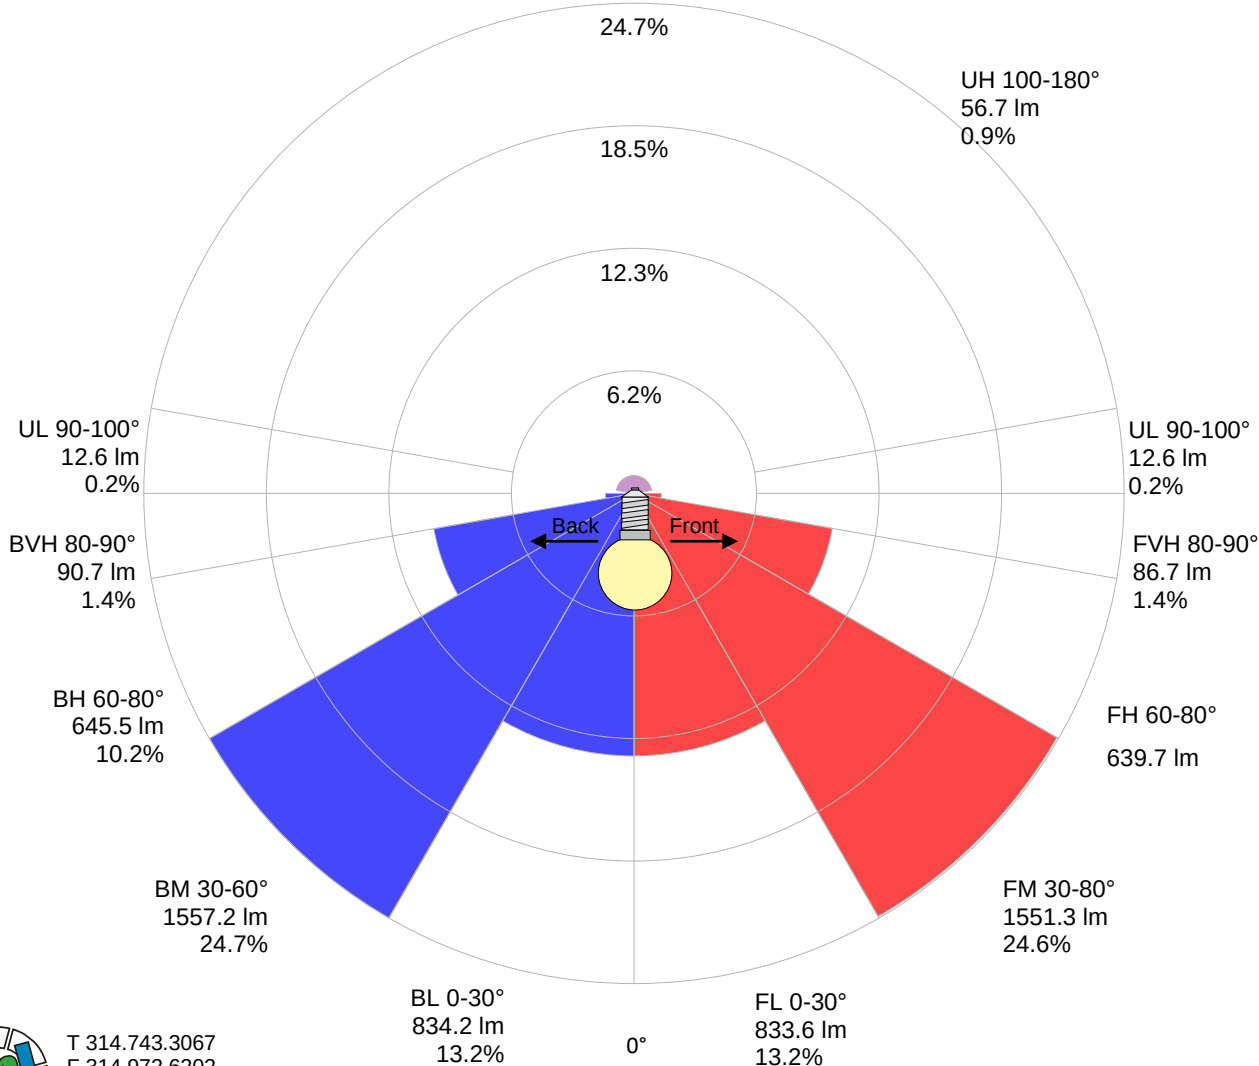

Stabilization

Warmup curve

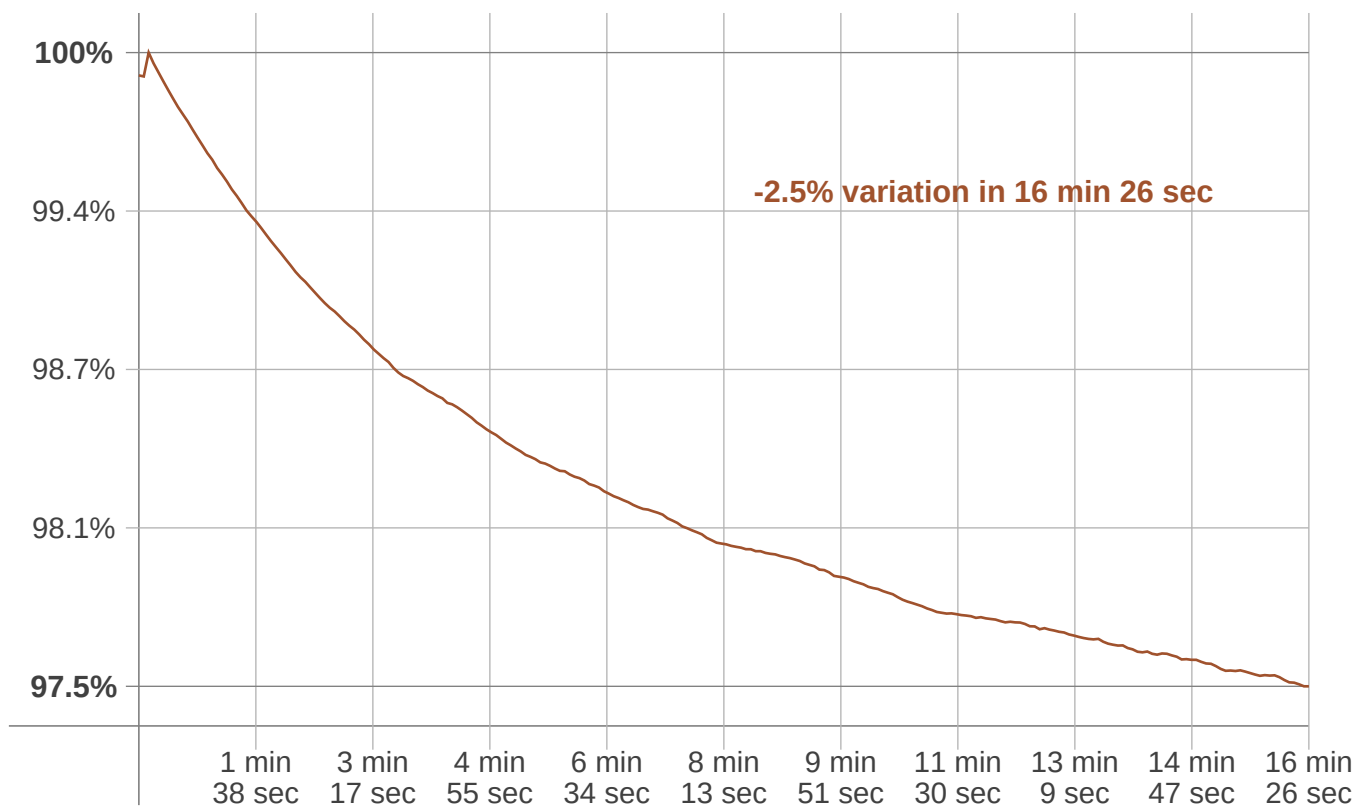

Warmup result

Warmup time:	16 min 26 sec
Warmup variation	-2.5%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
4036 K	+12 K	4048 K


Output change

Output start	Output change	Output end
6445 lm	-136 lm	6309 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

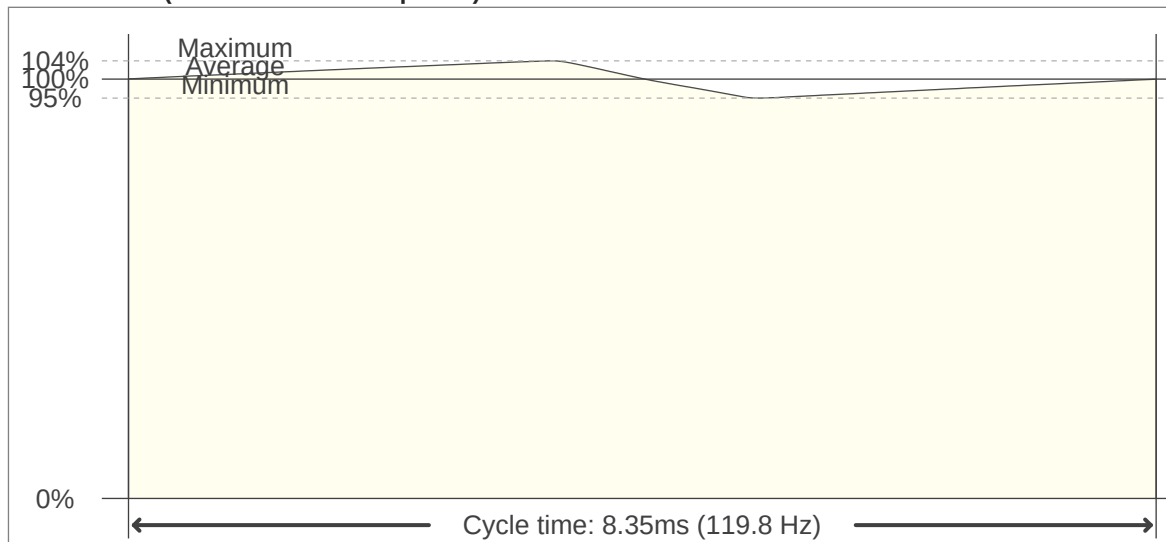

Flicker FFT (frequency scope of flicker curve)

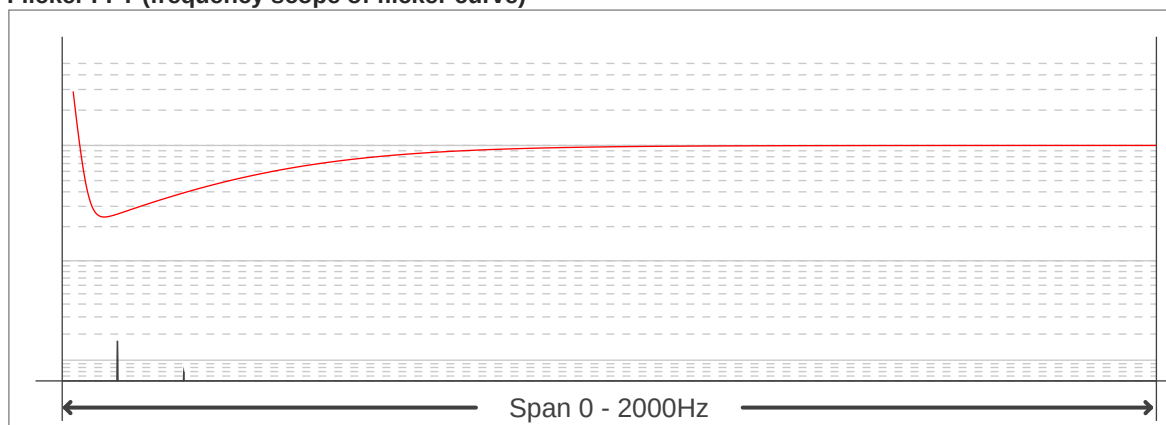

Flicker results:

Flicker frequency:	119.76 Hz
Flicker index:	0.01
Flicker percentage:	4.49 %
SVM: (Visual flicker)	0.12

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

