

Light efficiency:

141 Lumen/Watt

Output: 14506 lm

Light quality:

CRI: 83.3


Peak: 8276 cd

Color temperature:

5334 K

Power: 102.8 W

PF: 0.99

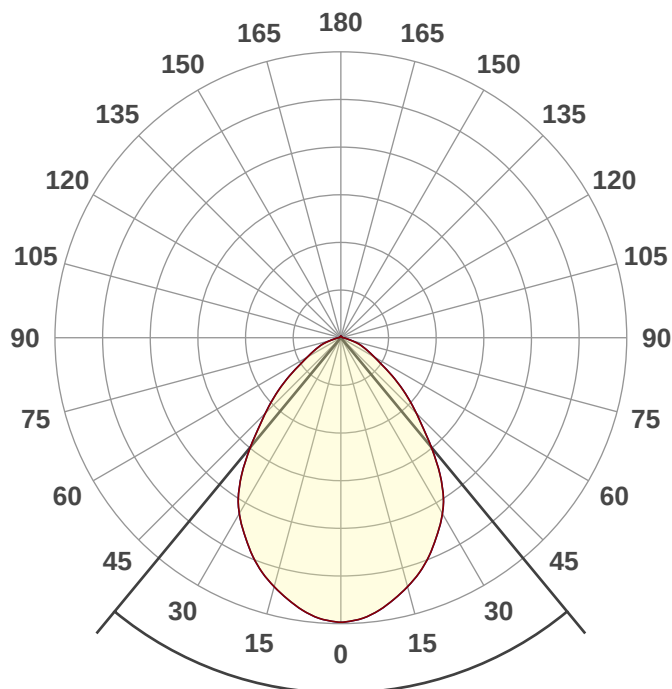

Product name:

UDSR-50K100-ACBKM

Date and time:

2/6/2020 1:02:35 PM

Beam angle

79.1°




CIE 1931


x: 0.337

y: 0.345

Spectra

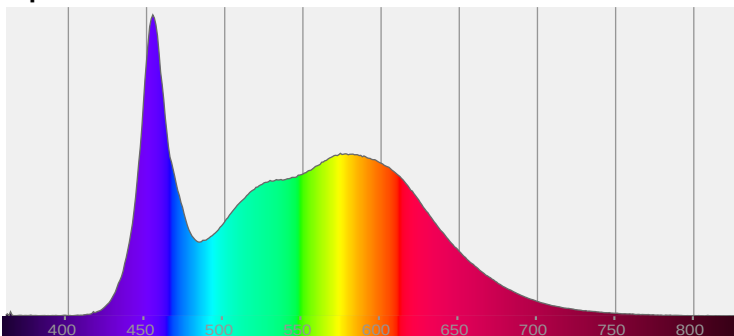

Power

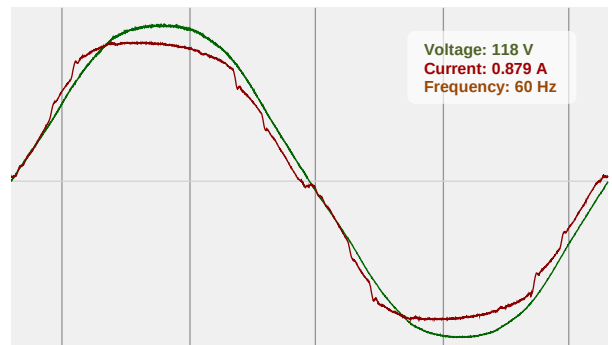



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

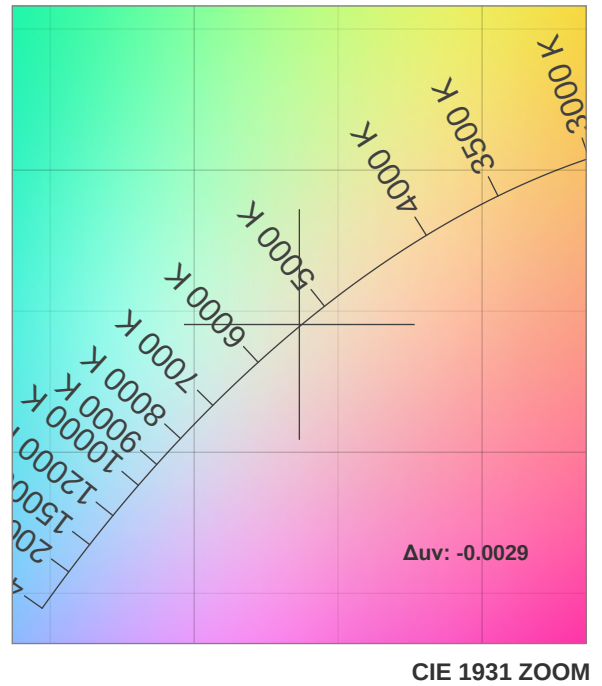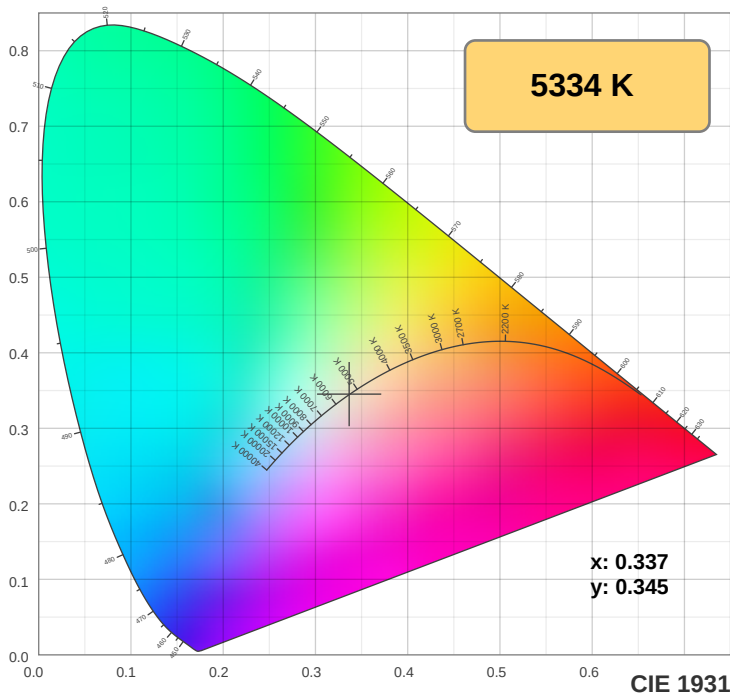

TM30: 79.8

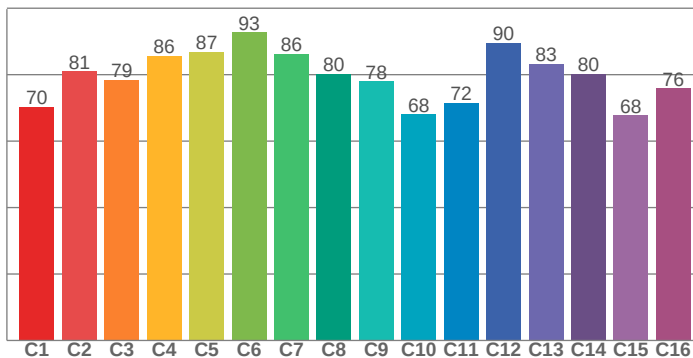

CRI: 83.3 (R1-R8)

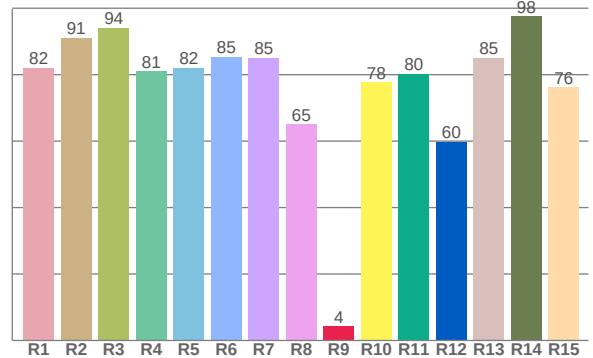

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82.1	91.1	94.2	81.0	82.1	85.5	85.1	65.2	4.4	77.7	80.2	59.8	85.2	97.5	76.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
70.2	81.0	78.5	85.6	86.9	92.7	86.3	80.3	78.0	68.1	71.6	89.6	83.2	80.3	67.8	75.9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
80.3	98.3	77.0	70.0	75.9	79.5	84.4	88.3	97.3	87.4	81.6	79.2	78.9	68.6	73.2

CQS: 79.5

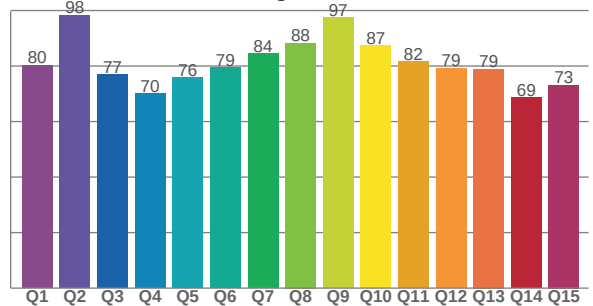

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5334 K	83.3	4.4	79.8	92.4	79.5	0.337	0.345	0.208	0.320	-0.0029



TM30 Report







Rf 79.8

Fidelity index Rf

Rg 92.4

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	70	-14%	1%
2	81	-7%	7%
3	79	-5%	9%
4	86	-2%	5%
5	87	-4%	2%
6	93	-2%	-2%
7	86	-8%	-1%
8	80	-9%	5%
9	78	-9%	15%
10	68	-4%	17%
11	72	4%	15%
12	90	5%	1%
13	83	7%	-9%
14	80	2%	-11%
15	68	-3%	-21%
16	76	-6%	-11%

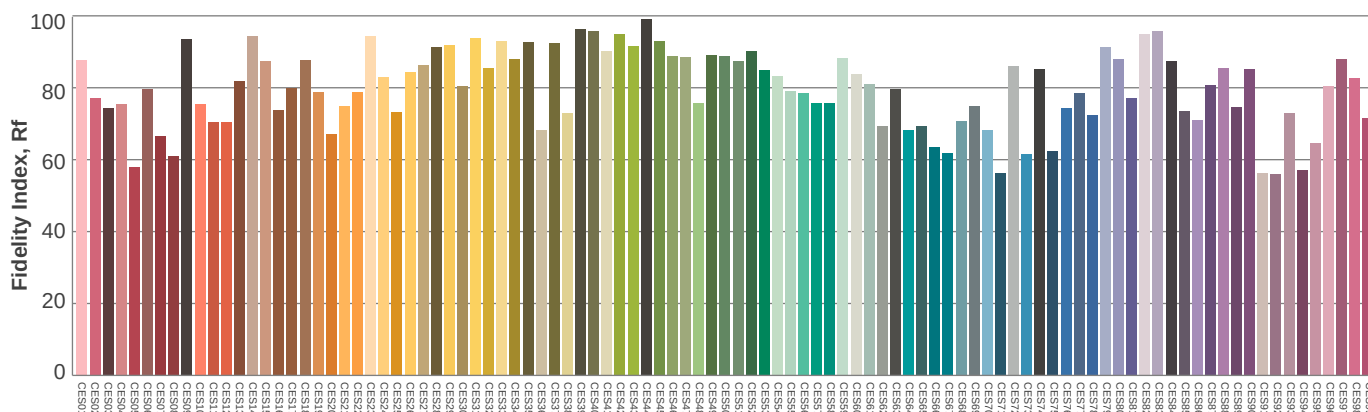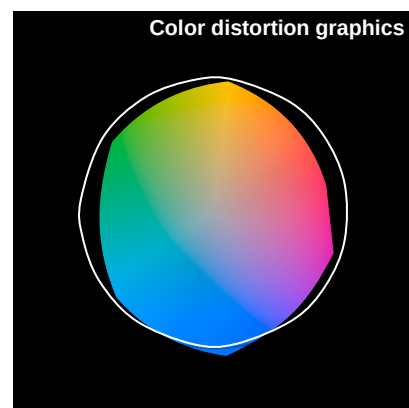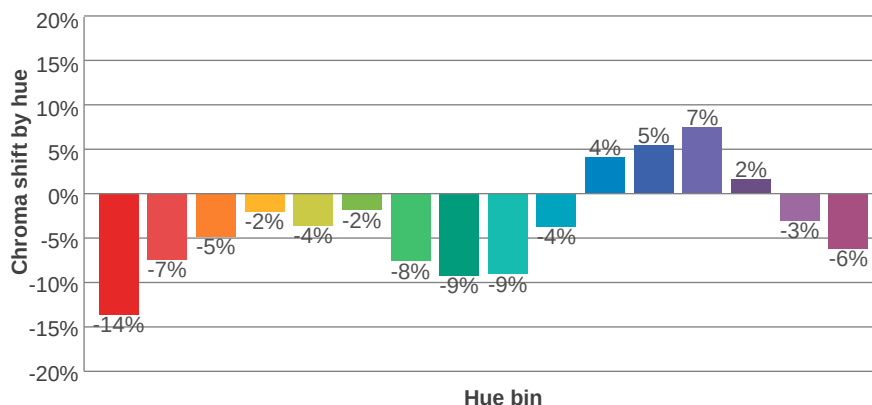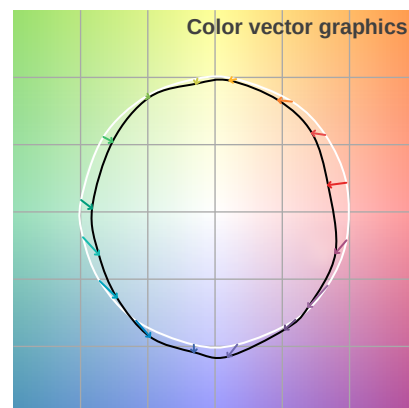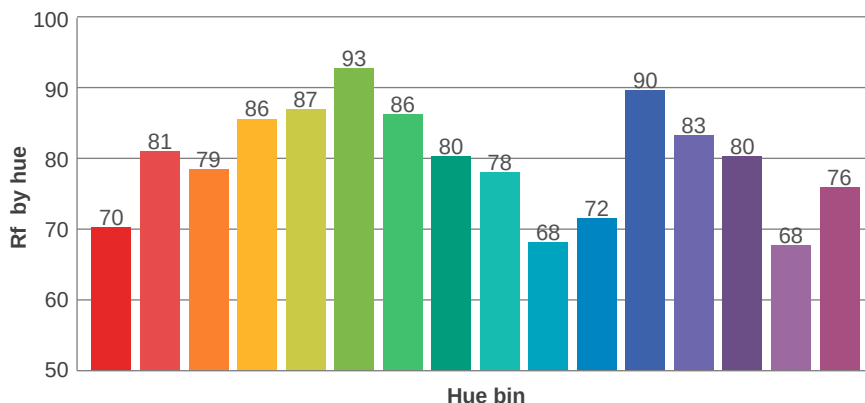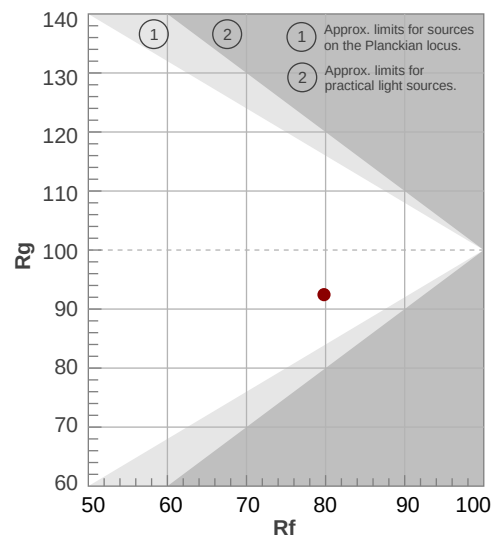

Color Evaluation Sample



Illumination

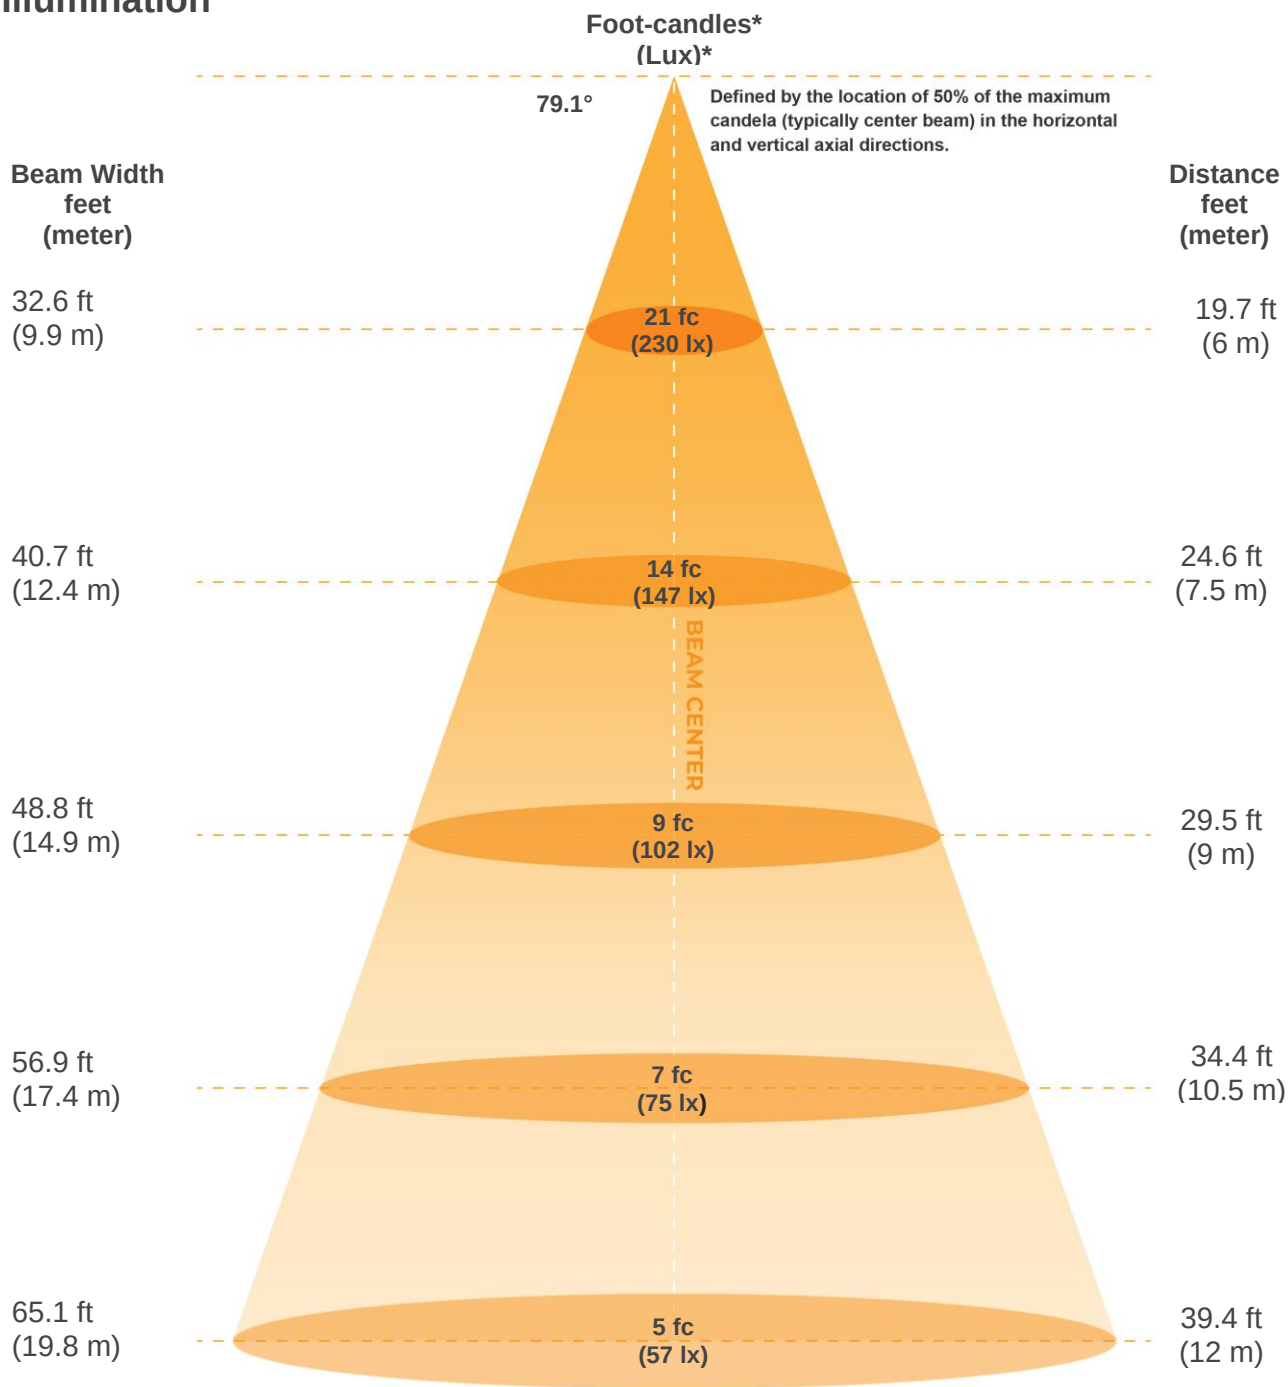

*measured at center of beam

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
8276lx	2069lx	920lx	517lx	331lx	230lx	169lx	129lx	102lx	83lx	68lx	57lx	49lx	42lx	37lx	32lx	29lx	26lx	23lx	21lx
768.8fc	192.2fc	85.4fcd	48.1fcd	30.8fcd	21.4fcd	15.7fcd	12fcd	9.5fcd	7.7fcd	6.4fcd	5.3fcd	4.5fcd	3.9fcd	3.4fcd	3fcd	2.7fcd	2.4fcd	2.1fcd	1.9fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
79.1°	129.8°	157.2°	89.2%	71.3%



ISO Diagrams

ISO candela diagram

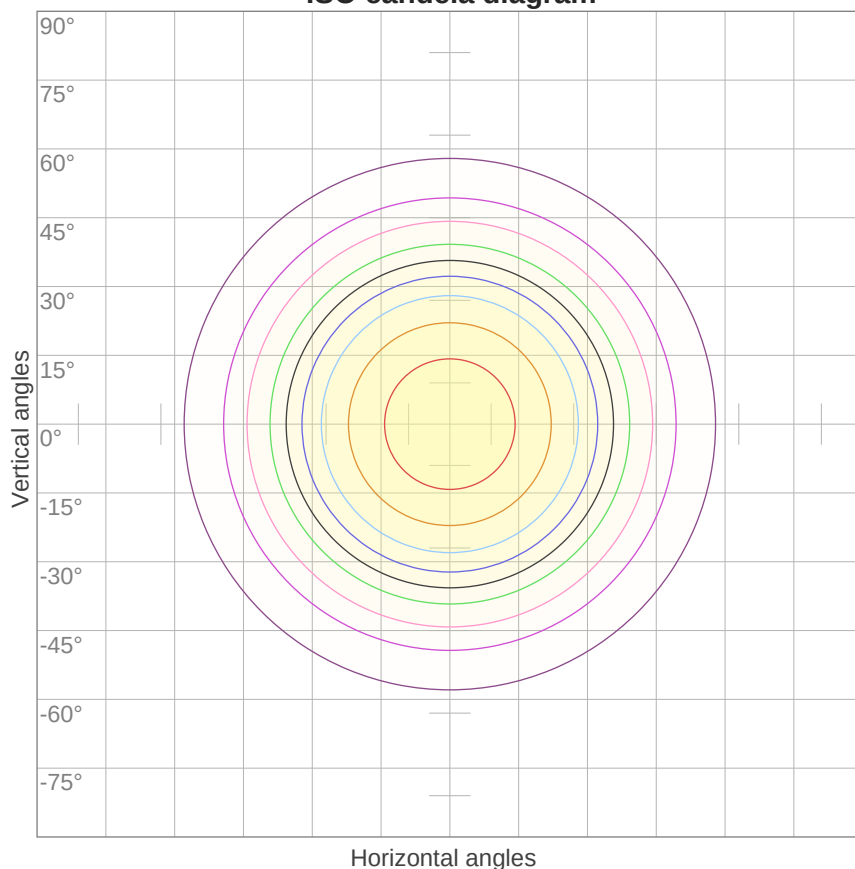


10%	828 cd
20%	1655 cd
30%	2483 cd
40%	3310 cd
50%	4138 cd
60%	4965 cd
70%	5793 cd
80%	6620 cd
90%	7448 cd

Conditions:

Number of c-planes: 16

Candela at center: 8276 cd

ISO lux diagram

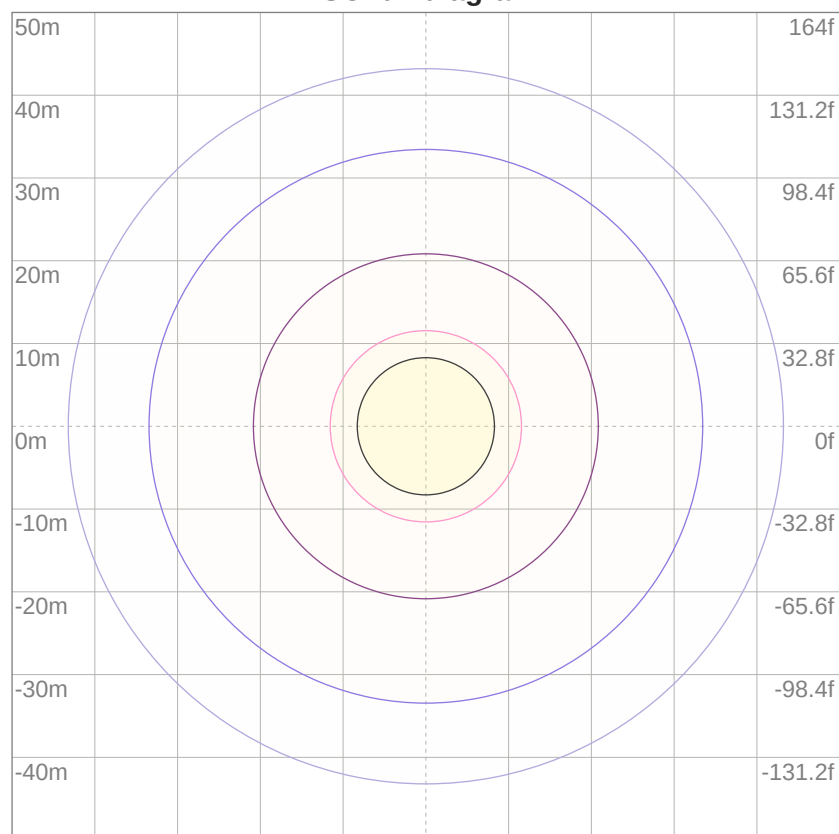

3%	2.48 lx
5%	4.14 lx
10%	8.28 lx
30%	24.8 lx
50%	41.4 lx

Conditions:

Number of c-planes: 16

Lux at center: 82.8 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	111	107	103	100	108	104	101	98	100	97	95	96	94	92	92	90	89	87
2	103	96	90	86	100	94	89	84	90	86	82	87	83	80	84	81	78	76
3	95	86	80	74	93	85	78	73	82	76	72	79	74	70	76	72	69	67
4	88	78	71	65	86	77	70	64	74	68	63	72	67	62	69	65	61	60
5	82	71	63	58	80	70	63	57	68	61	56	66	60	56	64	59	55	53
6	77	65	57	52	75	64	57	51	62	56	51	60	55	50	59	54	50	48
7	72	60	52	46	70	59	51	46	57	51	46	56	50	45	54	49	45	43
8	67	55	47	42	66	54	47	42	53	46	42	52	46	41	50	45	41	39
9	63	51	44	39	62	50	43	38	49	43	38	48	42	38	47	42	38	36
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	39	35	33

LAMPS (number of lamps)

Luminaire budgetary diagram

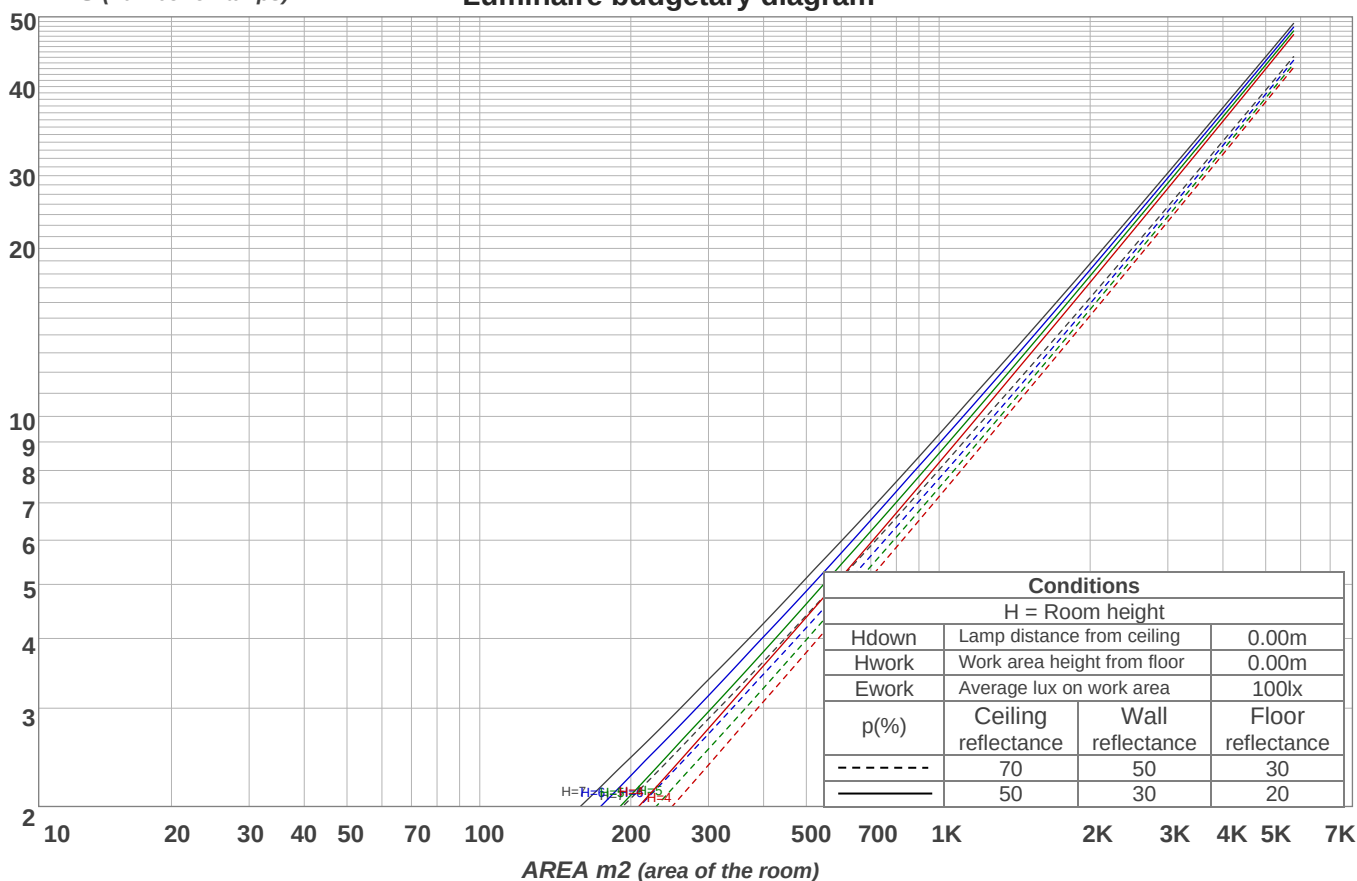

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
771 lm	2114 lm	2992 lm	3148 lm	2412 lm	1496 lm	824 lm	369 lm	121 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
53.1 lm	46.0 lm	42.2 lm	35.1 lm	29.9 lm	22.1 lm	15.6 lm	10.3 lm	3.94 lm




Road Report

LCS table


BUG rating:	B4 U3 G1	
Forward light	Lumens	Lumens %
Low(0-30):	2936	20.2%
Medium(30-60):	3530.1	24.3%
High(60-80):	596.2	4.1%
Very high(80-90):	60.9	0.4%
Back light		
Low(0-30):	2936	20.2%
Medium(30-60):	3530.1	24.3%
High(60-80):	596.2	4.1%
Very high(80-90):	60.9	0.4%
Uplight		
Low(90-100):	54	0.4%
High(100-180):	205.1	1.4%

LCS graph

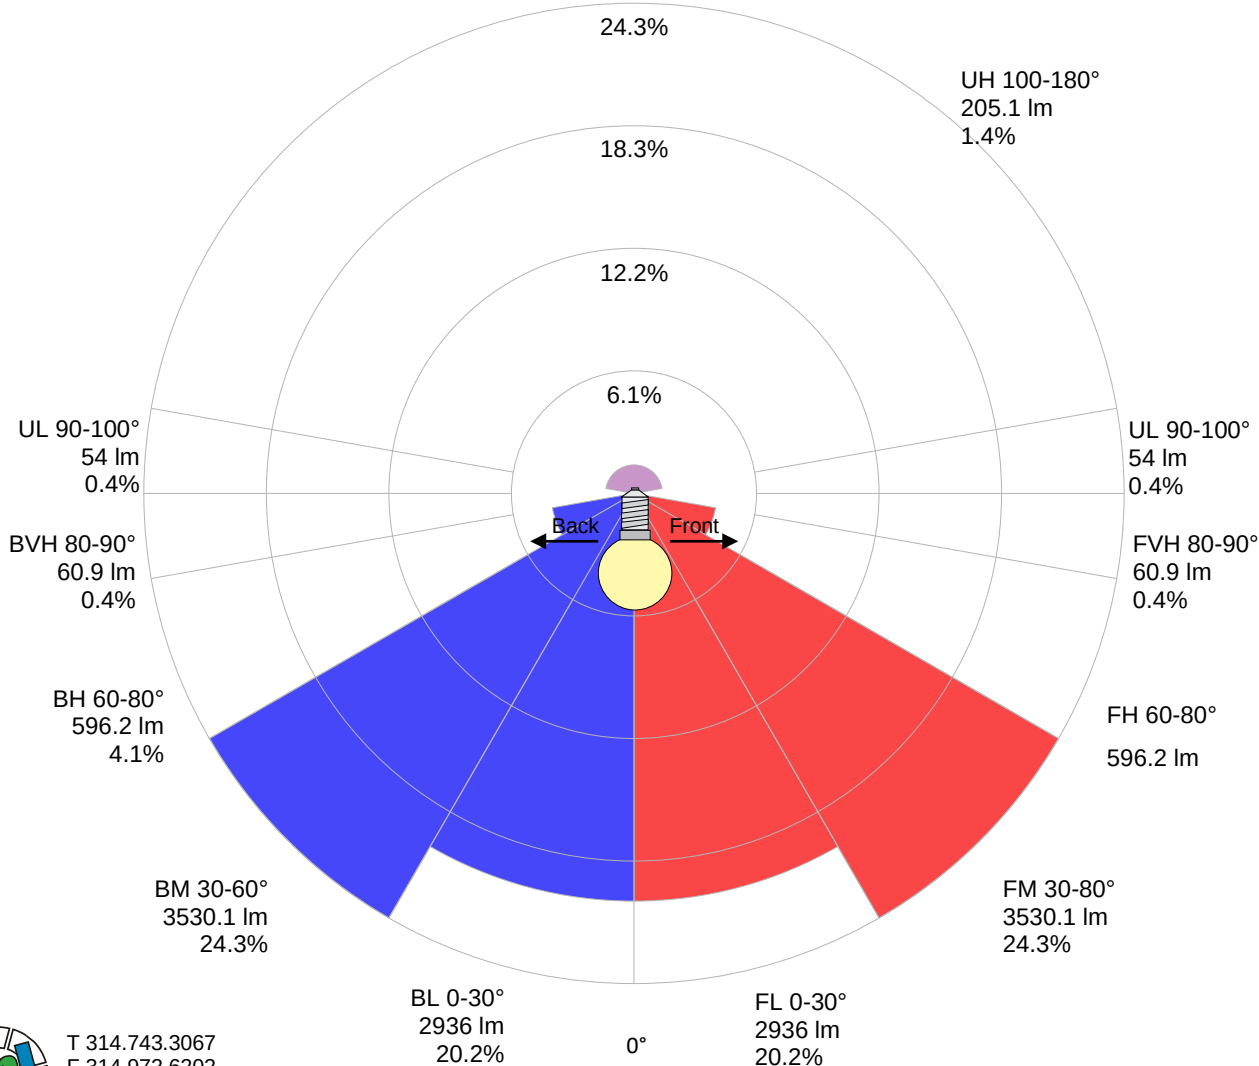

Stabilization

Warmup curve

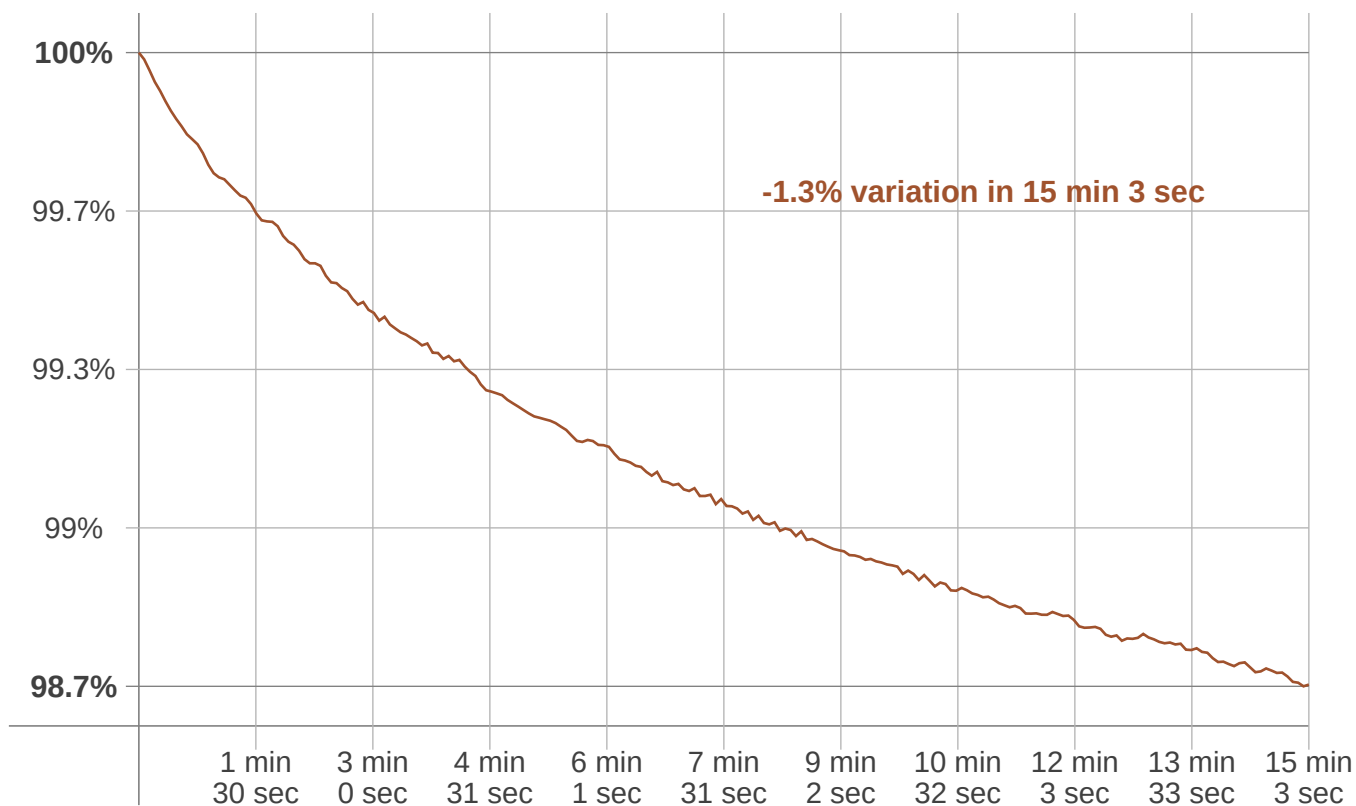

Warmup result

Warmup time:	15 min 3 sec
Warmup variation	-1.3%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5313 K	+21 K	5334 K


Output change

Output start	Output change	Output end
14682 lm	-177 lm	14506 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

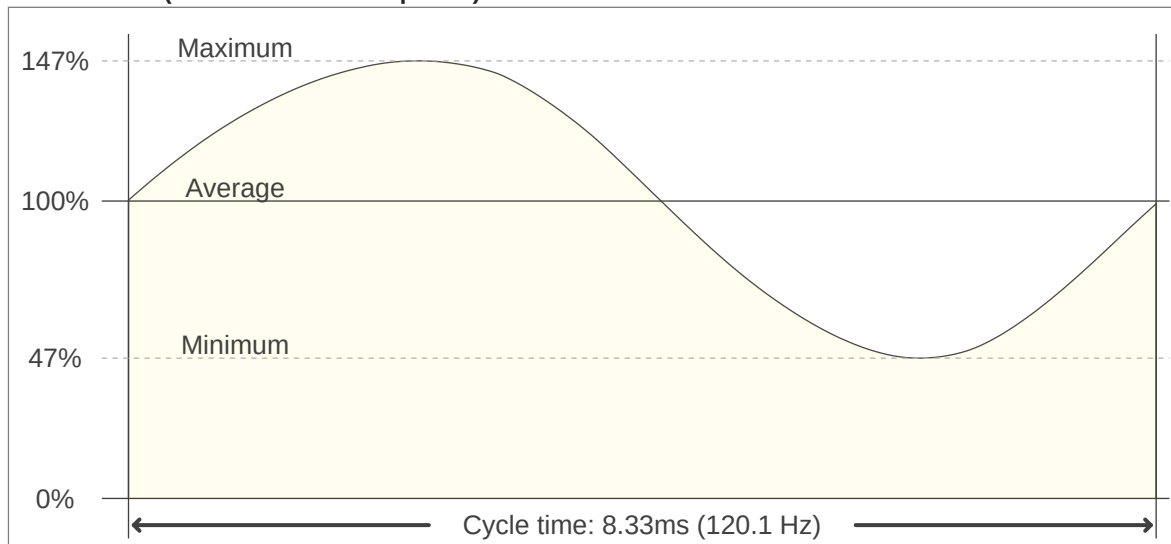

Flicker FFT (frequency scope of flicker curve)

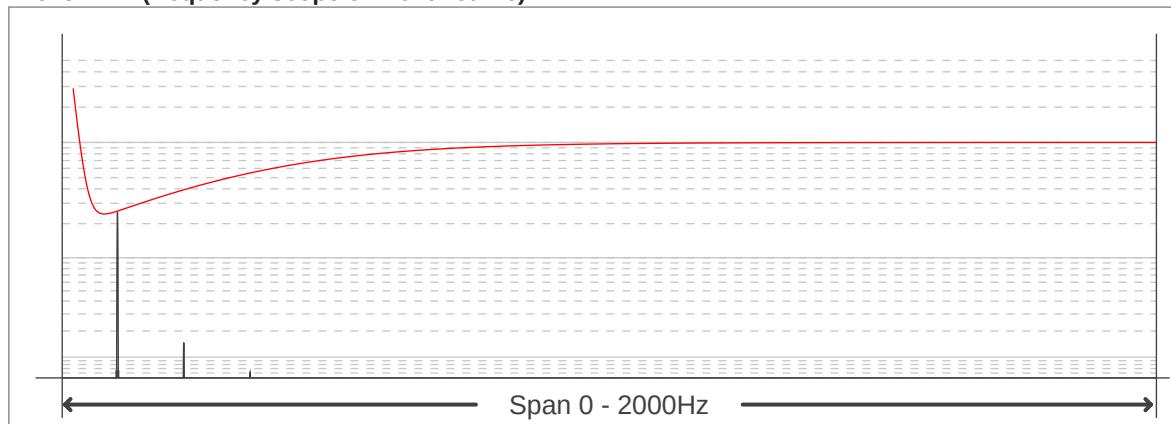

Flicker results:

Flicker frequency:	120.12 Hz
Flicker index:	0.16
Flicker percentage:	51.56 %
SVM: (Visual flicker)	1.81

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

