

Light efficiency:

141 Lumen/Watt

Output: 34431 lm

Light quality:

CRI: 83.6


Peak: 17549 cd

Color temperature:

5378 K

Power: 244.6 W

PF: 0.99

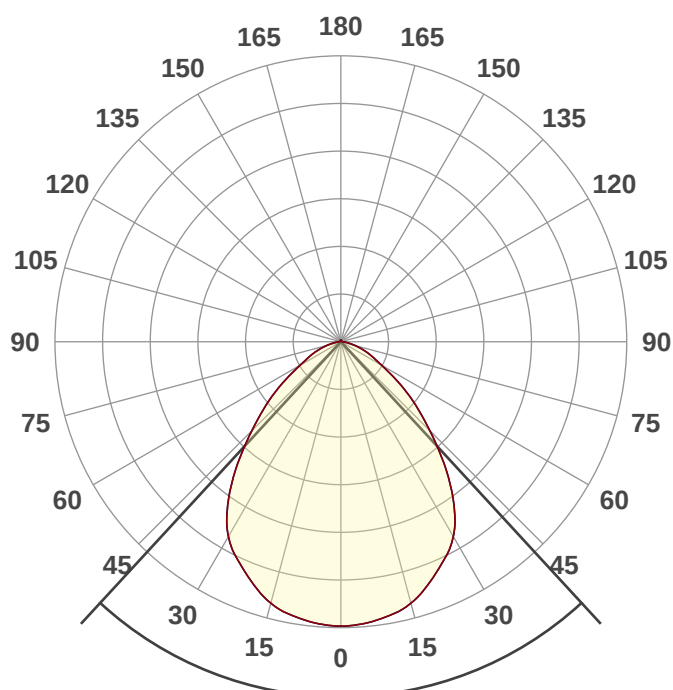

Product name:

UDSR-50K240-ACBKM
(with UDSR-PR90-2024 reflector)

Date and time:

1/9/2020 10:25:17 AM

Beam angle

85.3°




CIE 1931


x: 0.335

y: 0.344

Spectra

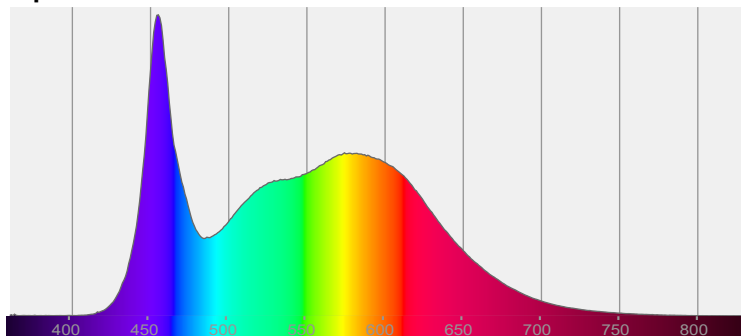

Power

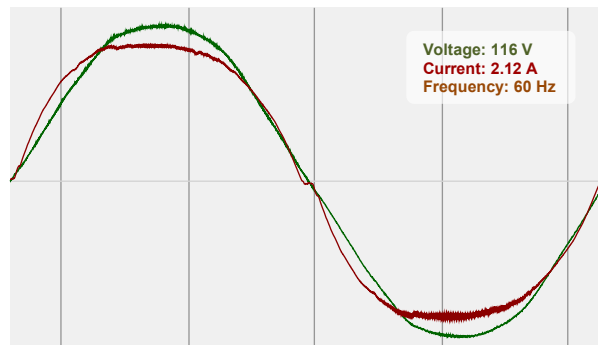



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

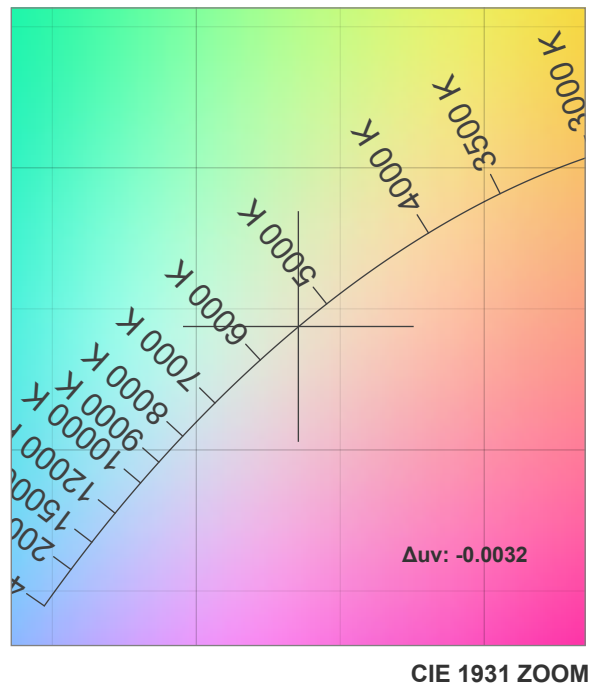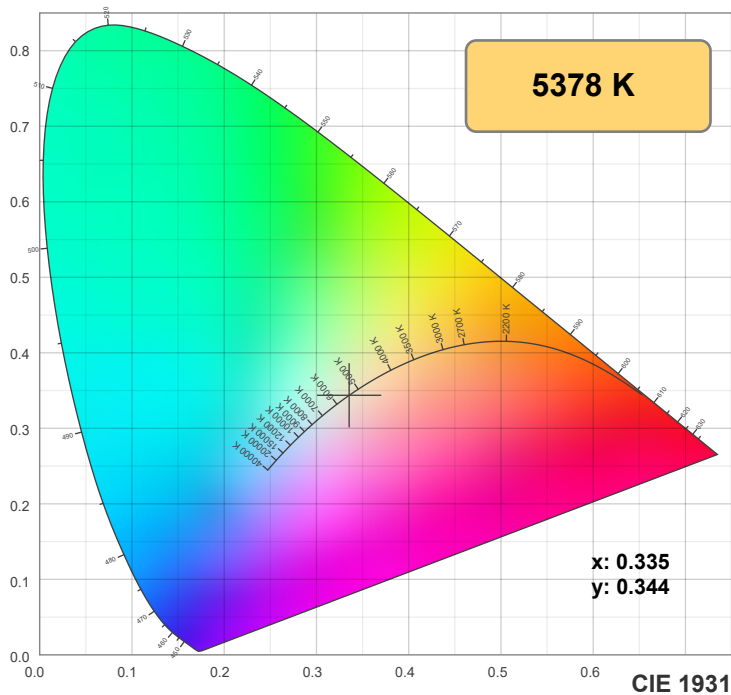

TM30: 79.8

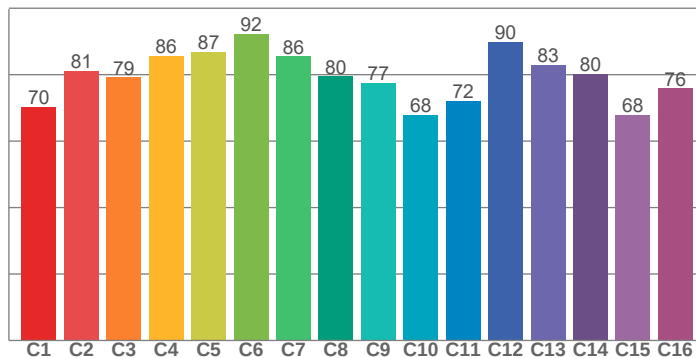

CRI: 83.6 (R1-R8)

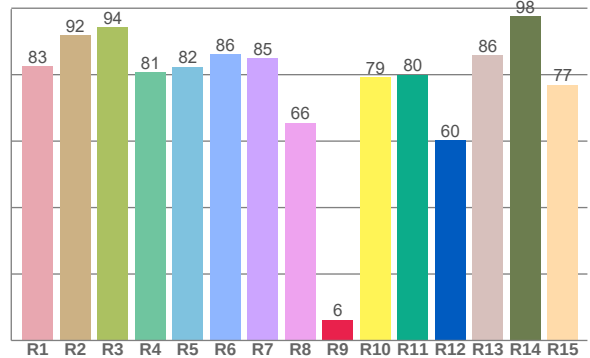

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82.6	91.9	94.3	80.8	82.4	86.1	84.9	65.5	6.3	79.2	80.0	60.3	85.9	97.7	77.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
70.3	81.1	79.2	85.7	86.8	92.4	85.5	79.5	77.5	67.9	72.2	89.8	83.0	80.3	67.9	75.9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
80.1	98.1	77.6	69.9	75.4	78.9	84.3	88.3	97.4	87.9	81.8	79.4	79.1	69.1	73.6

CQS: 79.6

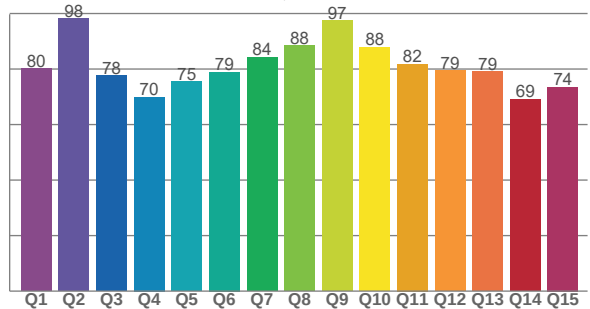

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5378 K	83.6	6.3	79.8	92.2	79.6	0.335	0.344	0.208	0.320	-0.0032



T 314.743.3067

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/

TM30 Report







Rf 79.8

Fidelity index Rf


Rg 92.2

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	70	-14%	1%
2	81	-7%	7%
3	79	-5%	9%
4	86	-2%	4%
5	87	-4%	1%
6	92	-2%	-2%
7	86	-8%	0%
8	80	-9%	5%
9	77	-9%	16%
10	68	-3%	17%
11	72	4%	15%
12	90	5%	1%
13	83	7%	-9%
14	80	1%	-11%
15	68	-3%	-21%
16	76	-6%	-11%

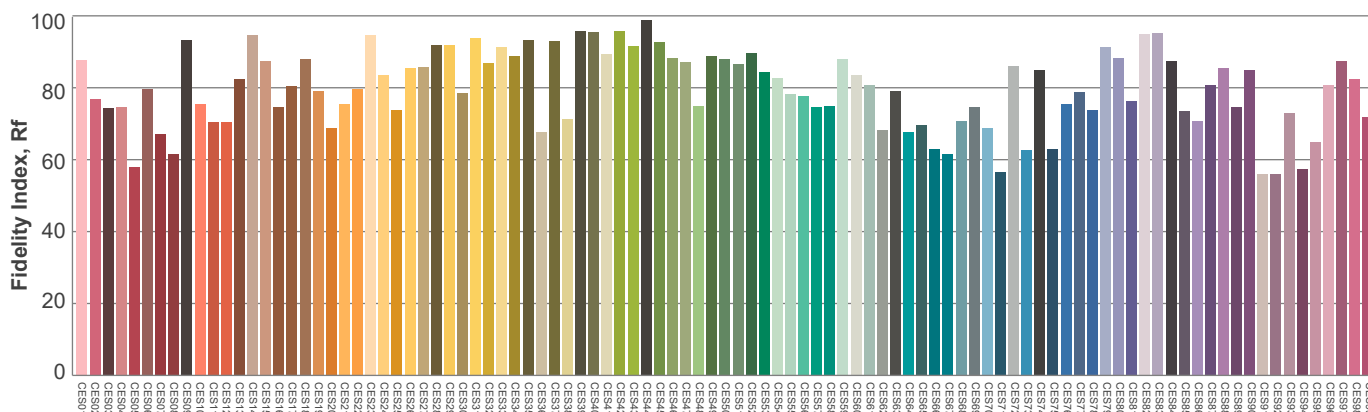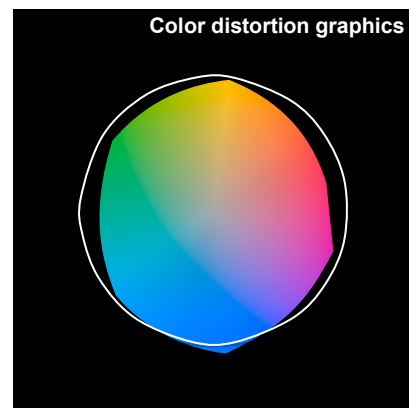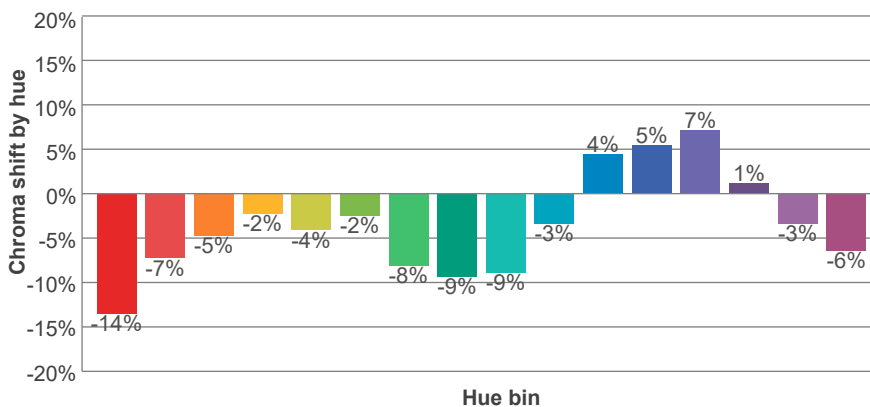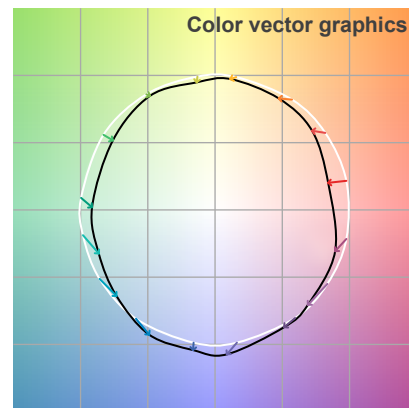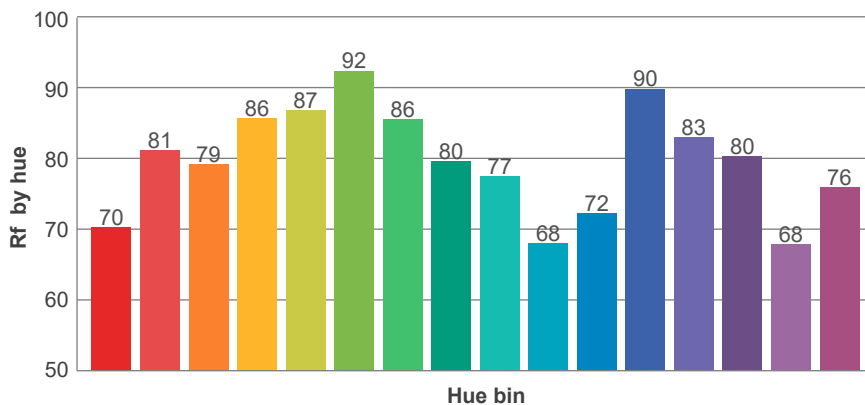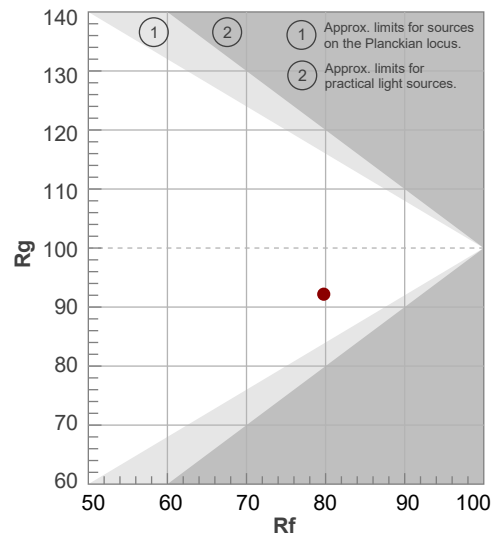

Illumination

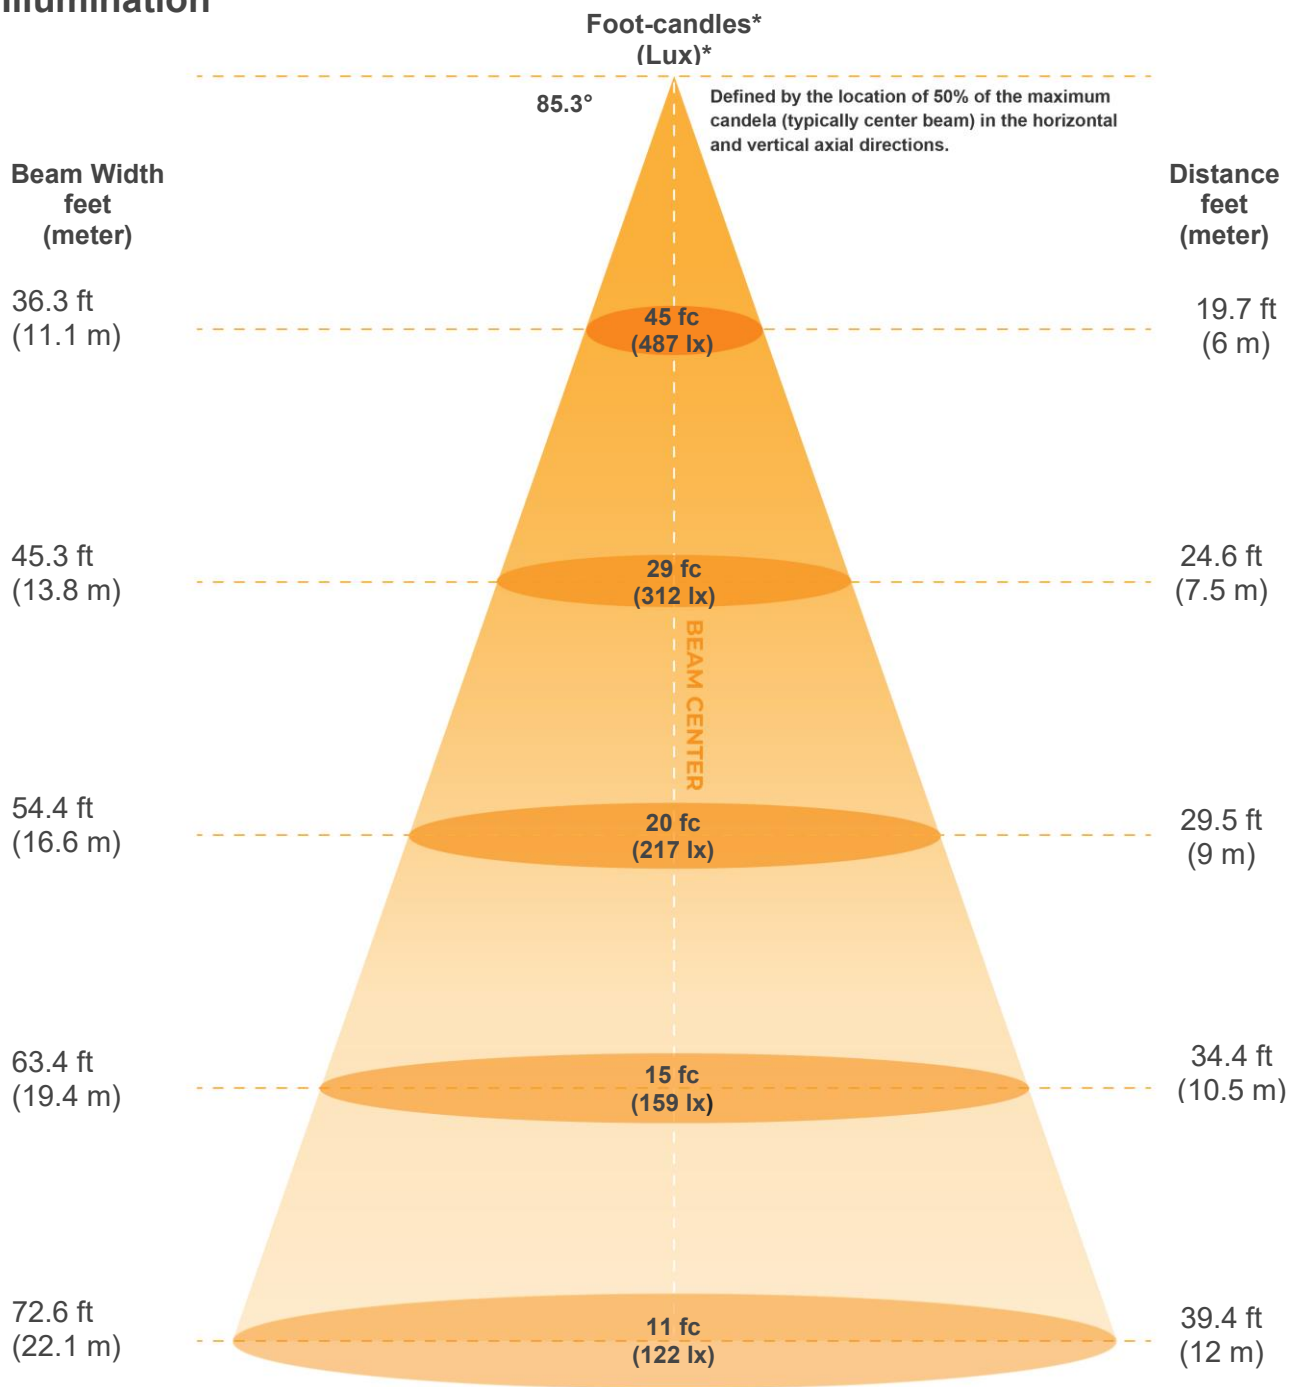

*measured at center of beam

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
17549lx	4387lx	1950lx	1097lx	702lx	487lx	358lx	274lx	217lx	175lx	145lx	122lx	104lx	90lx	78lx	69lx	61lx	54lx	49lx	44lx
1630.4f	407.6fc	181.2fc	101.9fc	65.2fcd	45.3fcd	33.3fcd	25.5fcd	20.1fcd	16.3fcd	13.5fcd	11.3fcd	9.6fcd	8.3fcd	7.2fcd	6.4fcd	5.6fcd	5fcd	4.5fcd	4.1fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
85.3°	135.5°	161.4°	89.2%	70.0%



ISO Diagrams

ISO candela diagram

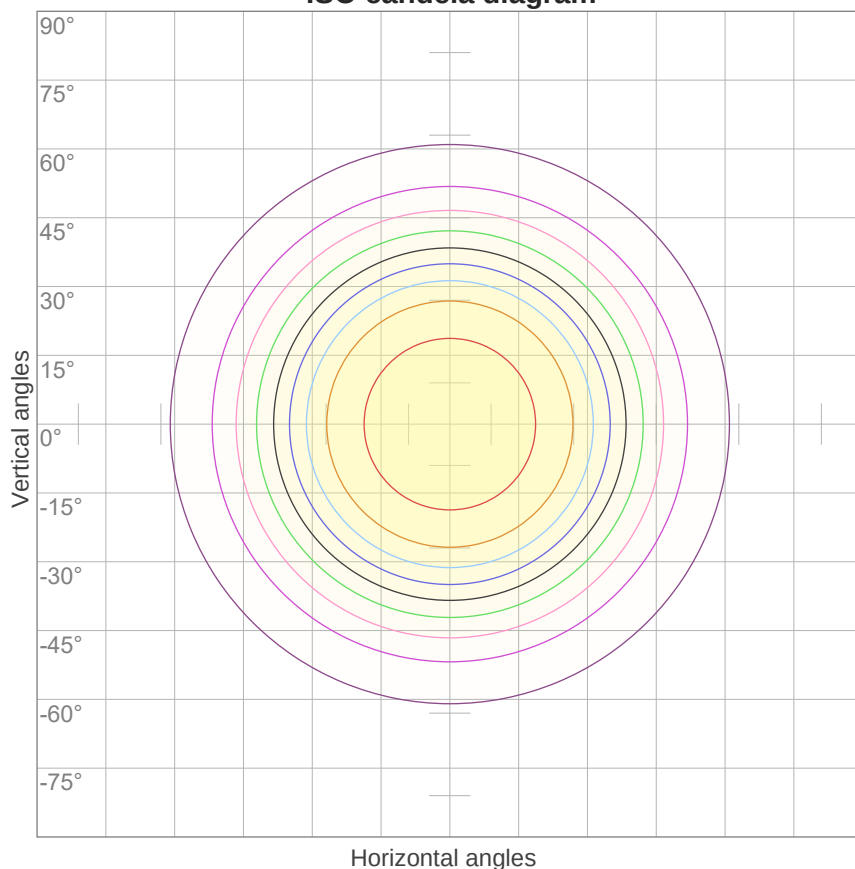


10%	1755 cd
20%	3510 cd
30%	5265 cd
40%	7020 cd
50%	8775 cd
60%	10530 cd
70%	12285 cd
80%	14039 cd
90%	15794 cd

Conditions:

Number of c-planes: 16

Candela at center: 17549 cd

ISO lux diagram

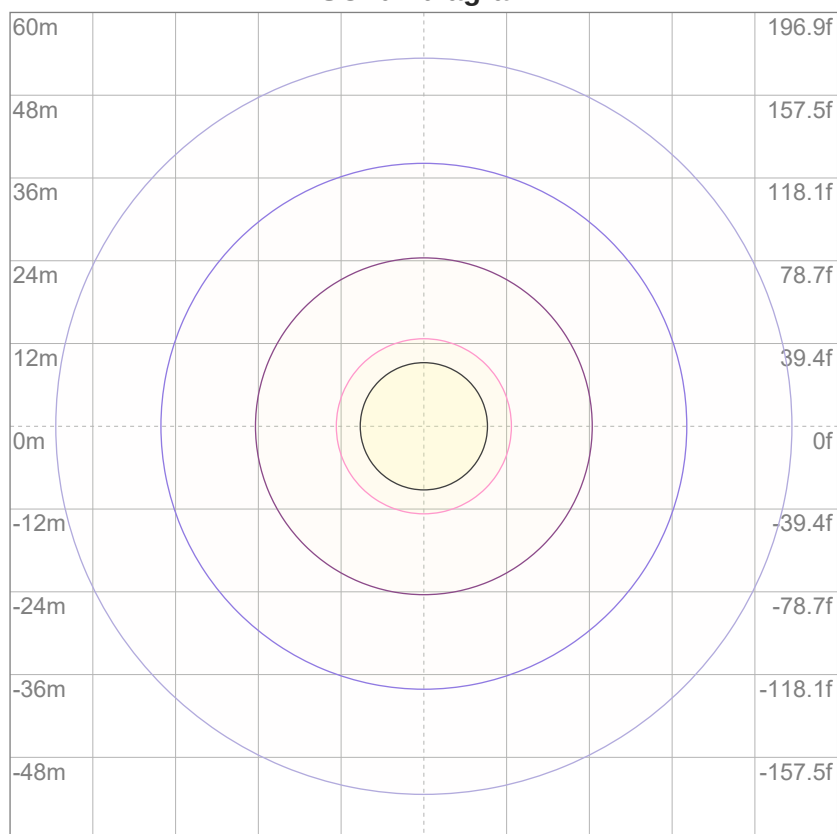

3%	5.26 lx
5%	8.77 lx
10%	17.5 lx
30%	52.6 lx
50%	87.7 lx

Conditions:

Number of c-planes: 16

Lux at center: 175 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	111	107	103	100	108	104	101	98	100	97	95	96	94	92	92	91	89	87
2	102	95	90	85	100	94	88	84	90	86	82	87	83	80	84	81	78	76
3	95	86	79	73	92	84	78	73	81	76	71	78	74	70	76	72	69	67
4	88	77	70	64	86	76	69	63	73	67	63	71	66	62	69	64	61	59
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52
6	76	64	56	50	74	63	56	50	61	55	50	59	54	49	58	53	49	47
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	53	48	44	42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	49	44	40	38
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	40	36	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	37	33	32

LAMPS (number of lamps)

Luminaire budgetary diagram

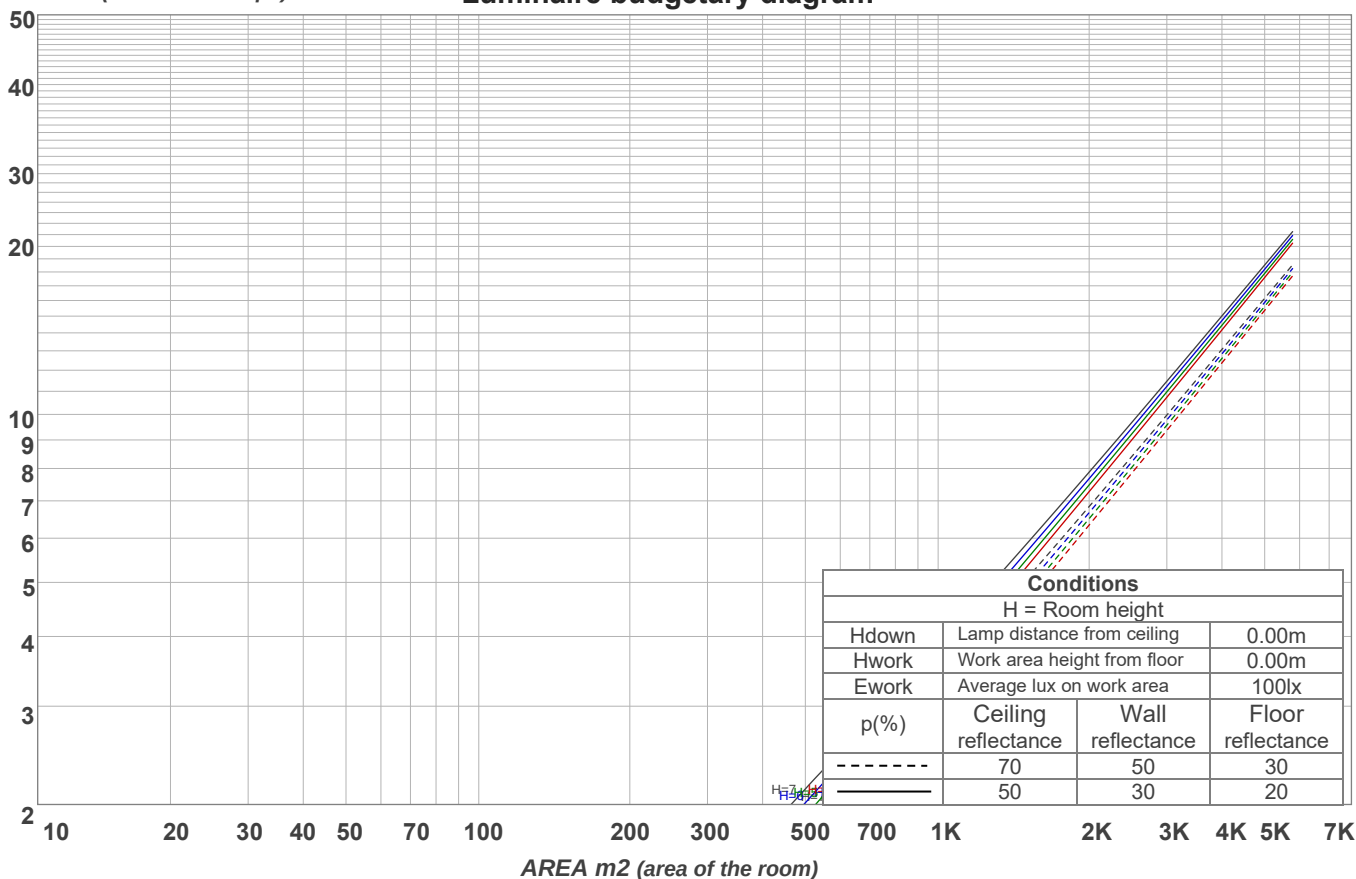

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
1656 lm	4696 lm	6904 lm	7508 lm	6036 lm	3902 lm	2078 lm	983 lm	256 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
75.4 lm	70.5 lm	63.0 lm	56.5 lm	49.4 lm	38.4 lm	29.9 lm	20.2 lm	7.68 lm




Road Report

LCS table


BUG rating:	B5 U3 G2	
Forward light	Lumens	Lumens %
Low(0-30):	6615.4	19.2%
Medium(30-60):	8719.5	25.3%
High(60-80):	1545.4	4.5%
Very high(80-90):	129	0.4%
Back light		
Low(0-30):	6615.4	19.2%
Medium(30-60):	8719.5	25.3%
High(60-80):	1545.4	4.5%
Very high(80-90):	129	0.4%
Uplight		
Low(90-100):	76.8	0.2%
High(100-180):	335.5	1%

LCS graph

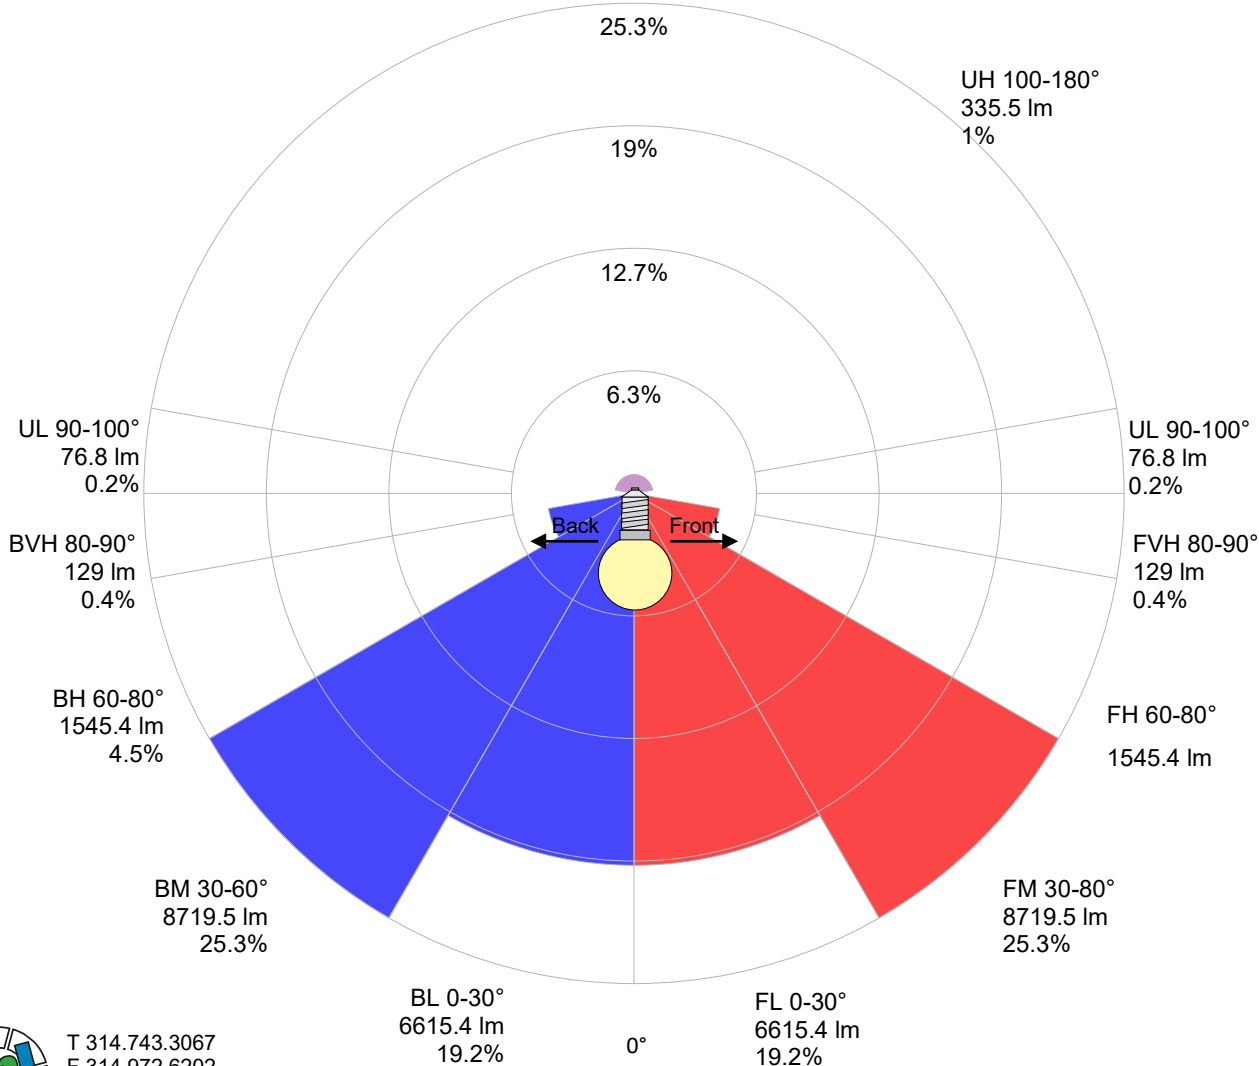

Stabilization

Warmup curve

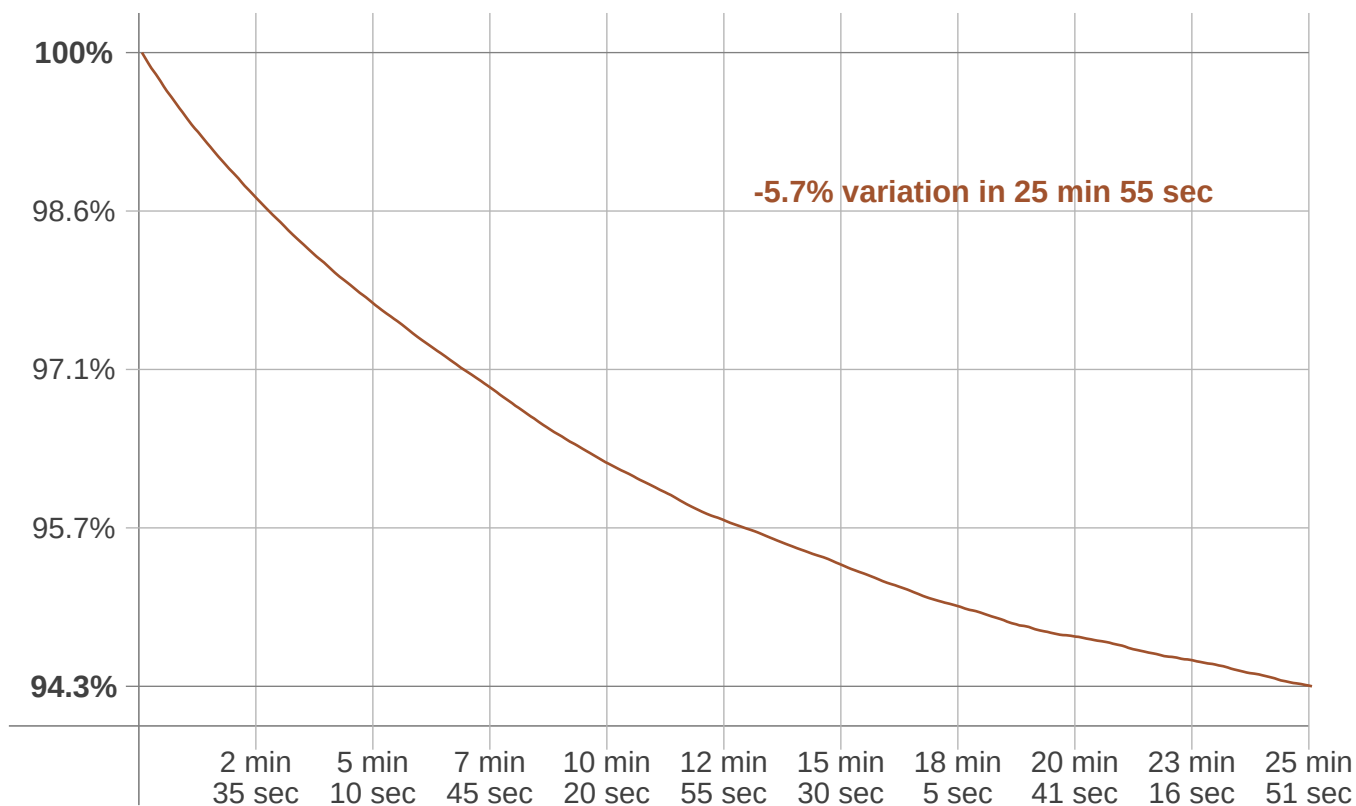

Warmup result

Warmup time:	25 min 55 sec
Warmup variation	-5.8%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5258 K	+120 K	5378 K


Output change

Output start	Output change	Output end
36490 lm	-2060 lm	34431 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

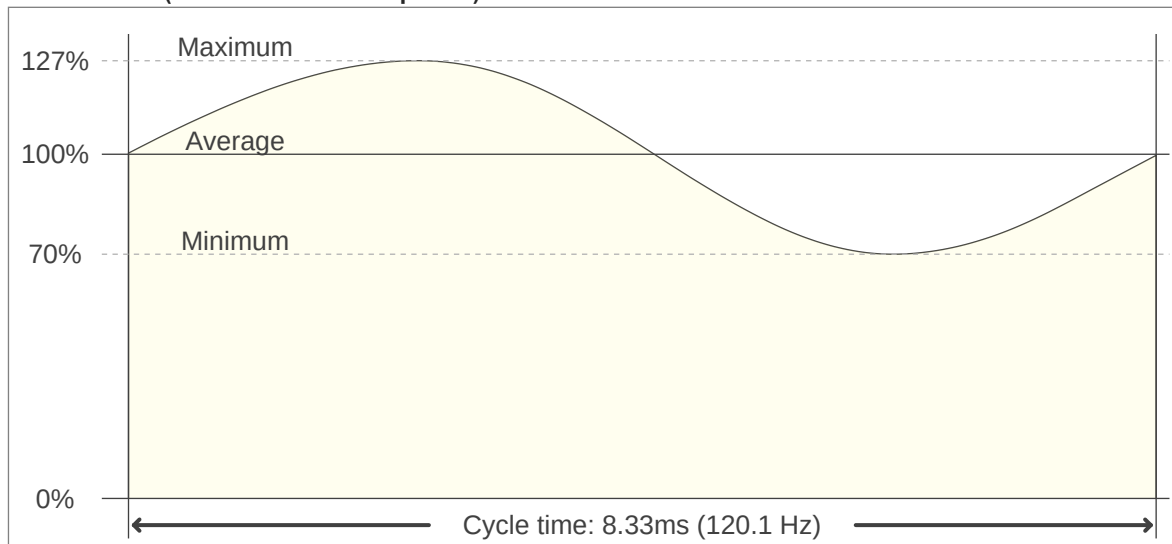

Flicker FFT (frequency scope of flicker curve)

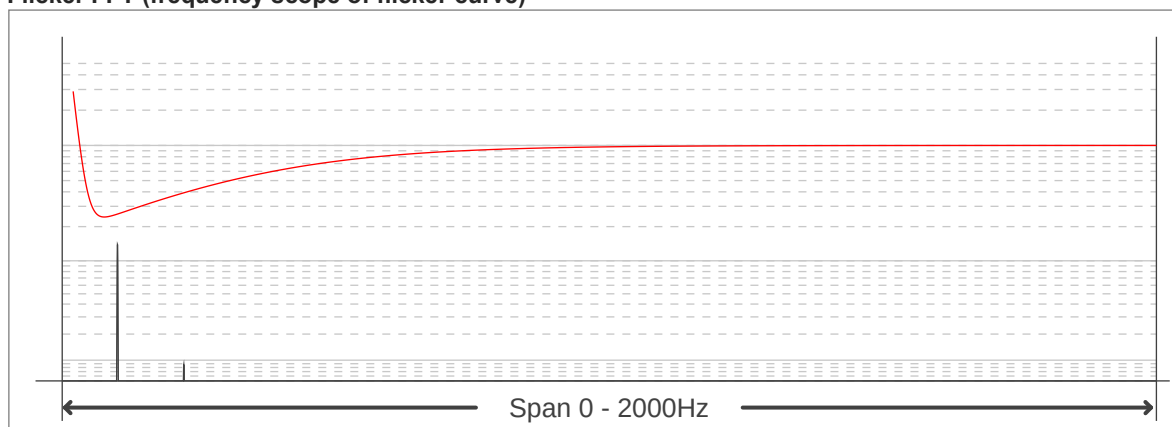

Flicker results:

Flicker frequency:	120.12 Hz
Flicker index:	0.09
Flicker percentage:	28.43 %
SVM: (Visual flicker)	1.01

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

