

Light efficiency:

129 Lumen/Watt

Output: 30522 lm

Light quality:

CRI: 82.7


Peak: 10703 cd

Color temperature:

5122 K

Power: 236.3 W

PF: 1.0

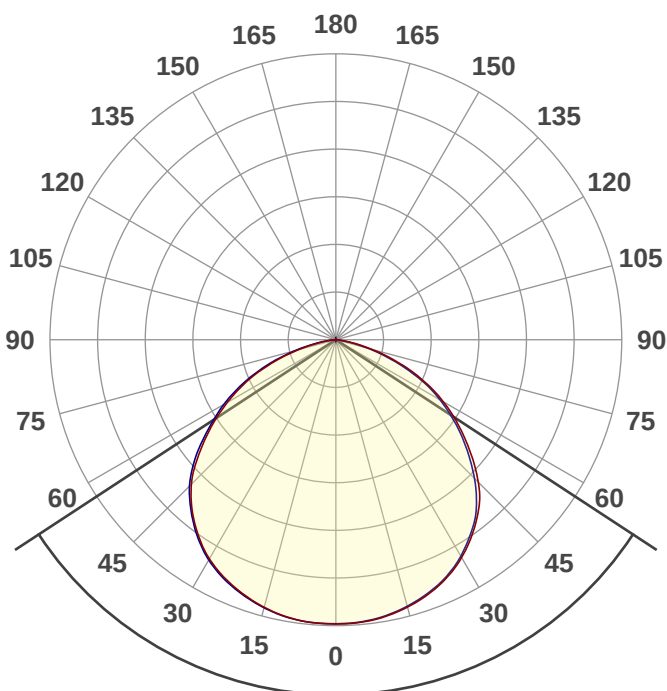

Product name:

UHBD-50K240CH-110

Date and time:

5/17/2019 11:04:07 AM

Beam angle

113.5°




CIE 1931


x: 0.342

y: 0.348

Spectra

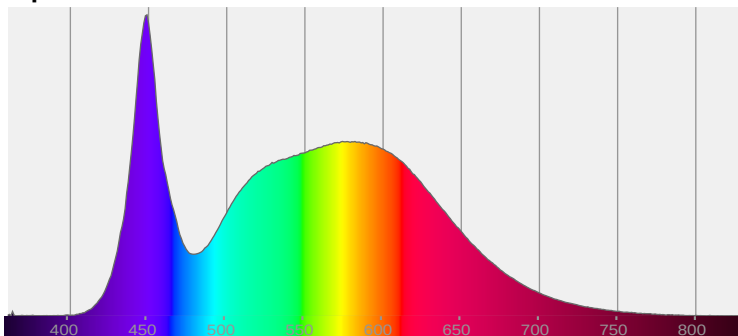

Power

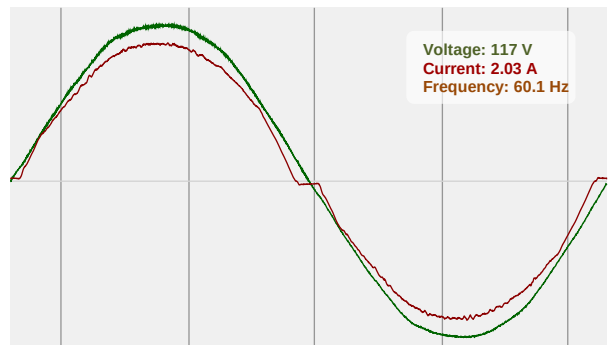



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

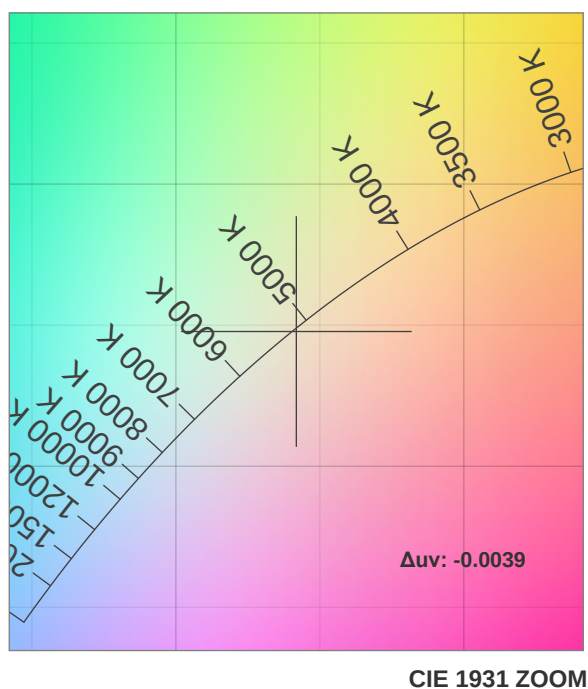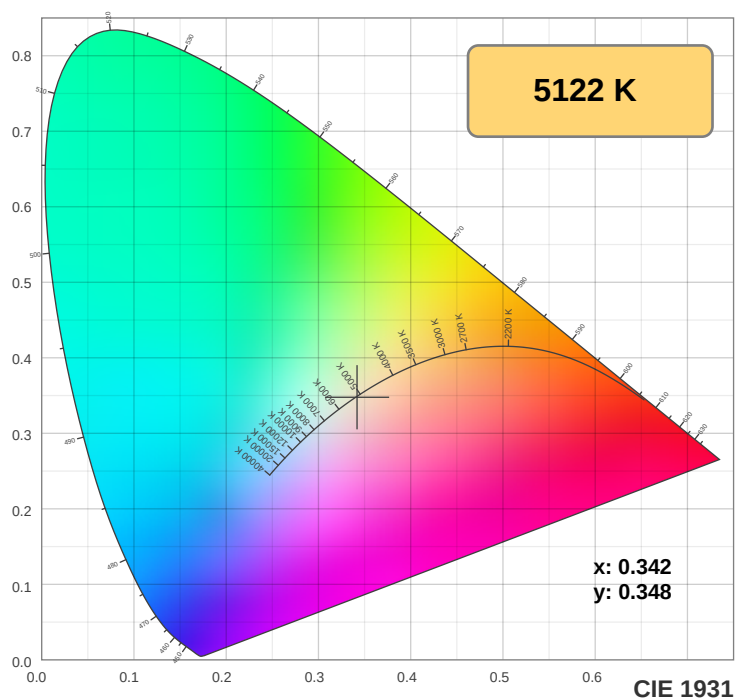

TM30: 80.9

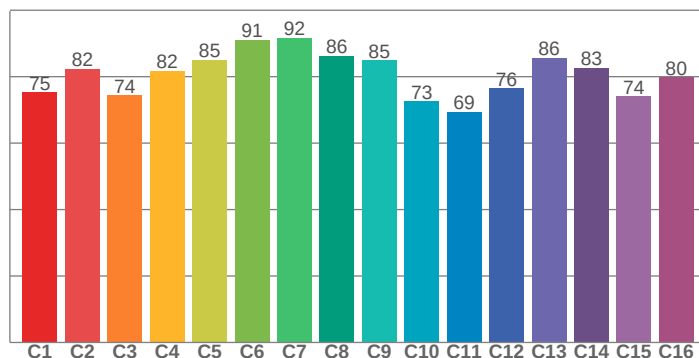

CRI: 82.7 (R1-R8)

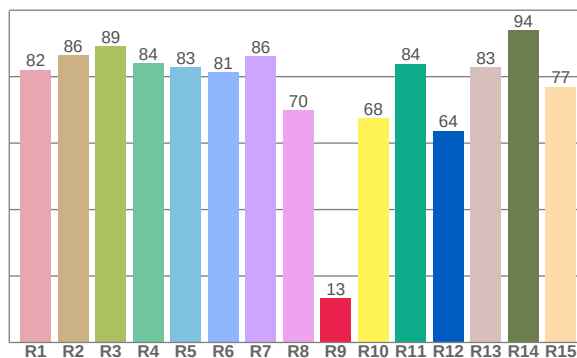

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82.1	86.5	89.1	84.0	82.8	81.3	86.2	70.0	13.2	67.6	83.9	63.7	82.9	93.9	77.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
75.2	82.4	74.4	81.7	85.1	91.0	91.6	86.4	84.9	72.6	69.5	76.5	85.6	82.6	74.1	79.8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
83.9	95.7	73.1	72.1	80.2	83.2	85.0	89.9	94.3	82.0	78.5	78.1	79.5	71.2	76.0

CQS: 80.2

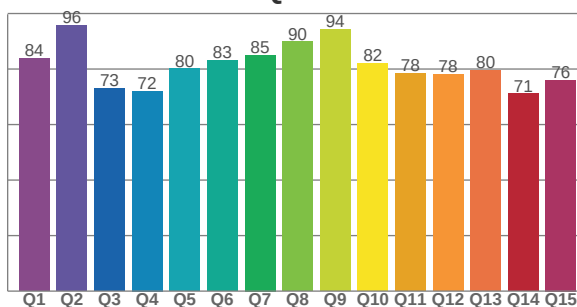

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5122 K	82.7	13.2	80.9	97.1	80.2	0.342	0.348	0.211	0.322	-0.0039



TM30 Report







Rf 80.9

Fidelity index Rf


Rg 97.1

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	75	-12%	-2%
2	82	-8%	6%
3	74	-4%	12%
4	82	1%	10%
5	85	4%	6%
6	91	5%	-1%
7	92	-1%	-4%
8	86	-6%	-2%
9	85	-10%	6%
10	73	-7%	13%
11	69	0%	18%
12	76	6%	11%
13	86	10%	-1%
14	83	6%	-6%
15	74	2%	-17%
16	80	-2%	-12%

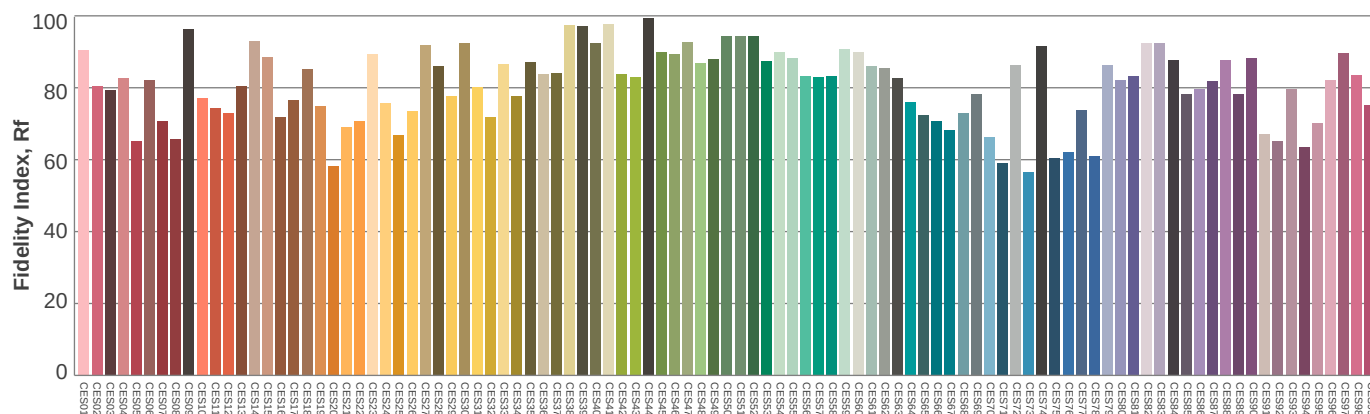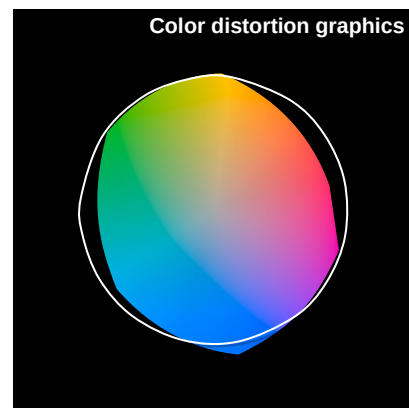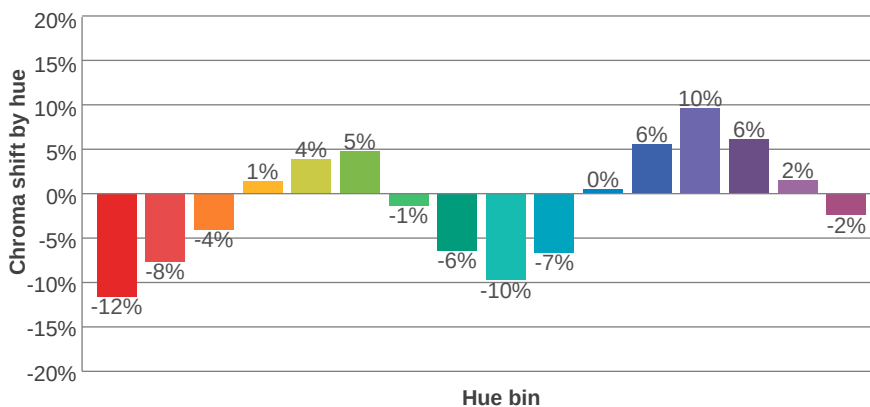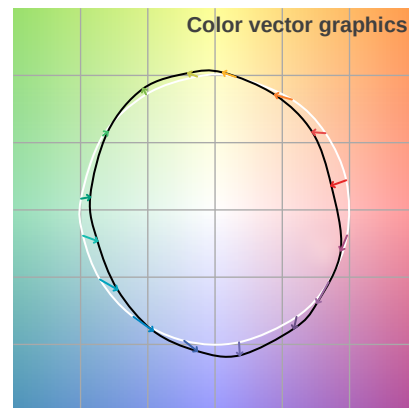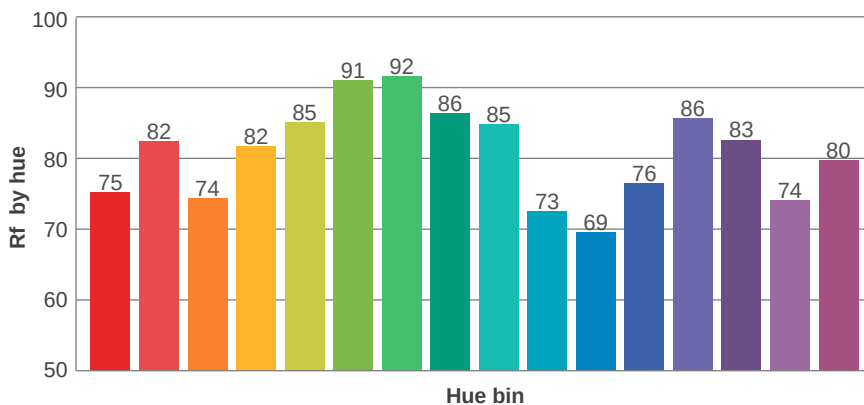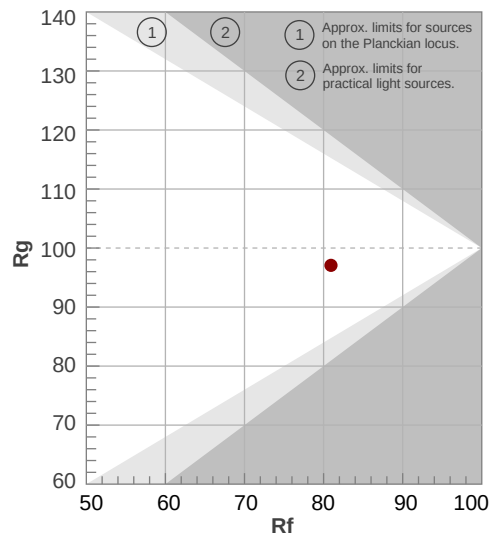

Illumination

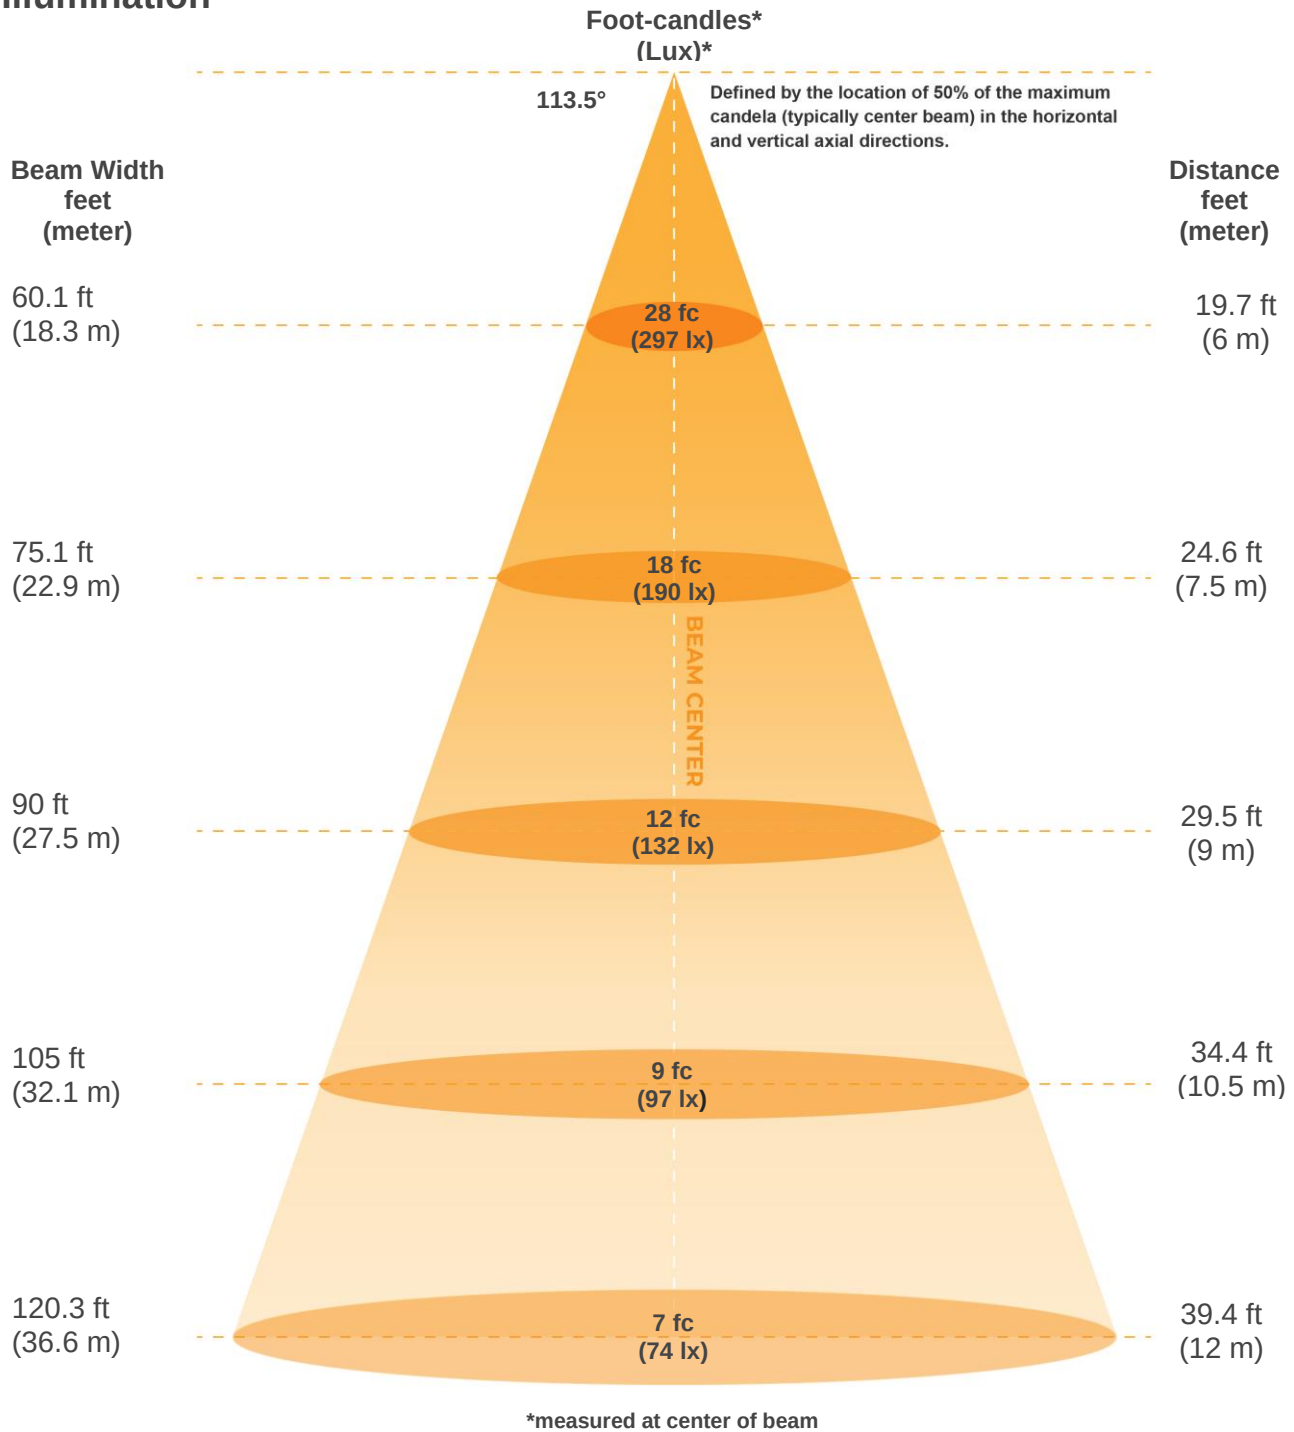

Beam intensities from 1-20m


1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
10691lx	2673lx	1188lx	668lx	428lx	297lx	218lx	167lx	132lx	107lx	88lx	74lx	63lx	55lx	48lx	42lx	37lx	33lx	30lx	27lx
993.3fc	248.3fc	110.4fc	62.1fcd	39.7fcd	27.6fcd	20.3fcd	15.5fcd	12.3fcd	9.9fcd	8.2fcd	6.9fcd	5.9fcd	5.1fcd	4.4fcd	3.9fcd	3.4fcd	3.1fcd	2.8fcd	2.5fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
113.5°	154.3°	166.2°	82.1%	56.0%



ISO Diagrams

ISO candela diagram

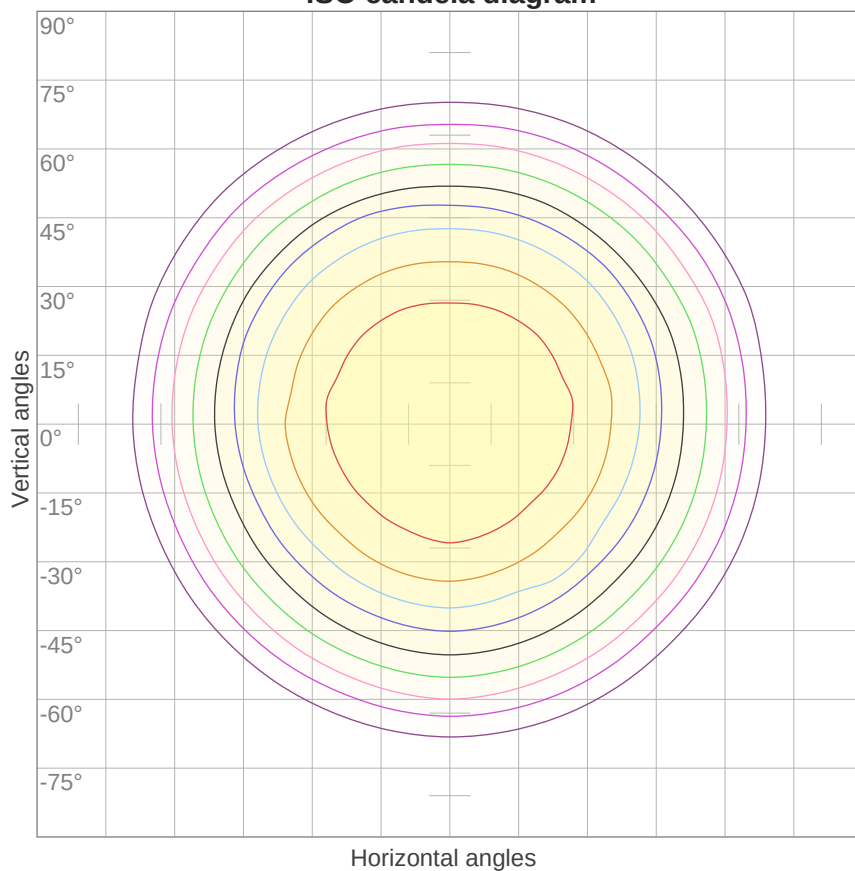


10%	1069 cd
20%	2138 cd
30%	3207 cd
40%	4277 cd
50%	5346 cd
60%	6415 cd
70%	7484 cd
80%	8553 cd
90%	9622 cd

Conditions:

Number of c-planes: 16

Candela at center: 10691 cd

ISO lux diagram

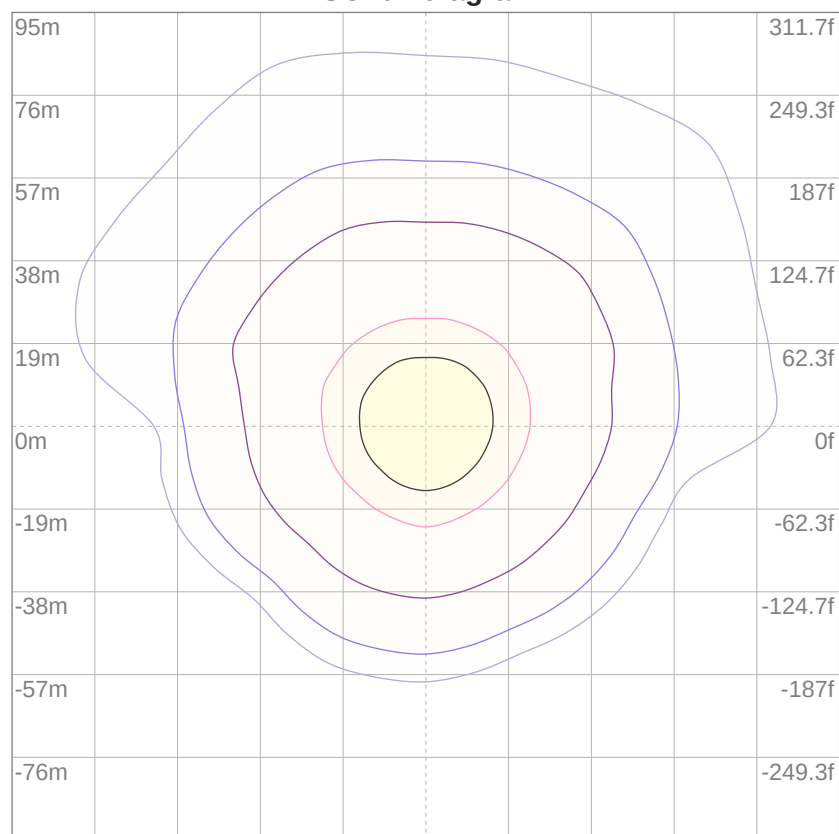

3%	3.21 lx
5%	5.35 lx
10%	10.7 lx
30%	32.1 lx
50%	53.5 lx

Conditions:

Number of c-planes: 16

Lux at center: 107 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	93	95	92	90	91	89	87	85
2	100	92	85	80	97	90	84	79	86	81	77	83	79	75	80	77	74	71
3	91	81	73	67	89	79	72	66	76	70	65	73	68	64	71	66	63	60
4	83	72	63	56	81	70	62	56	68	61	55	65	59	55	63	58	54	52
5	77	64	55	49	75	63	55	48	61	53	48	59	52	47	57	51	47	45
6	71	58	49	42	69	57	48	42	55	47	42	53	46	41	52	46	41	39
7	66	52	43	37	64	51	43	37	50	42	37	48	42	37	47	41	36	34
8	61	48	39	33	59	47	39	33	46	38	33	44	38	33	43	37	33	31
9	57	44	35	30	56	43	35	30	42	35	30	41	34	30	40	34	29	28
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25

LAMPS (number of lamps)

Luminaire budgetary diagram

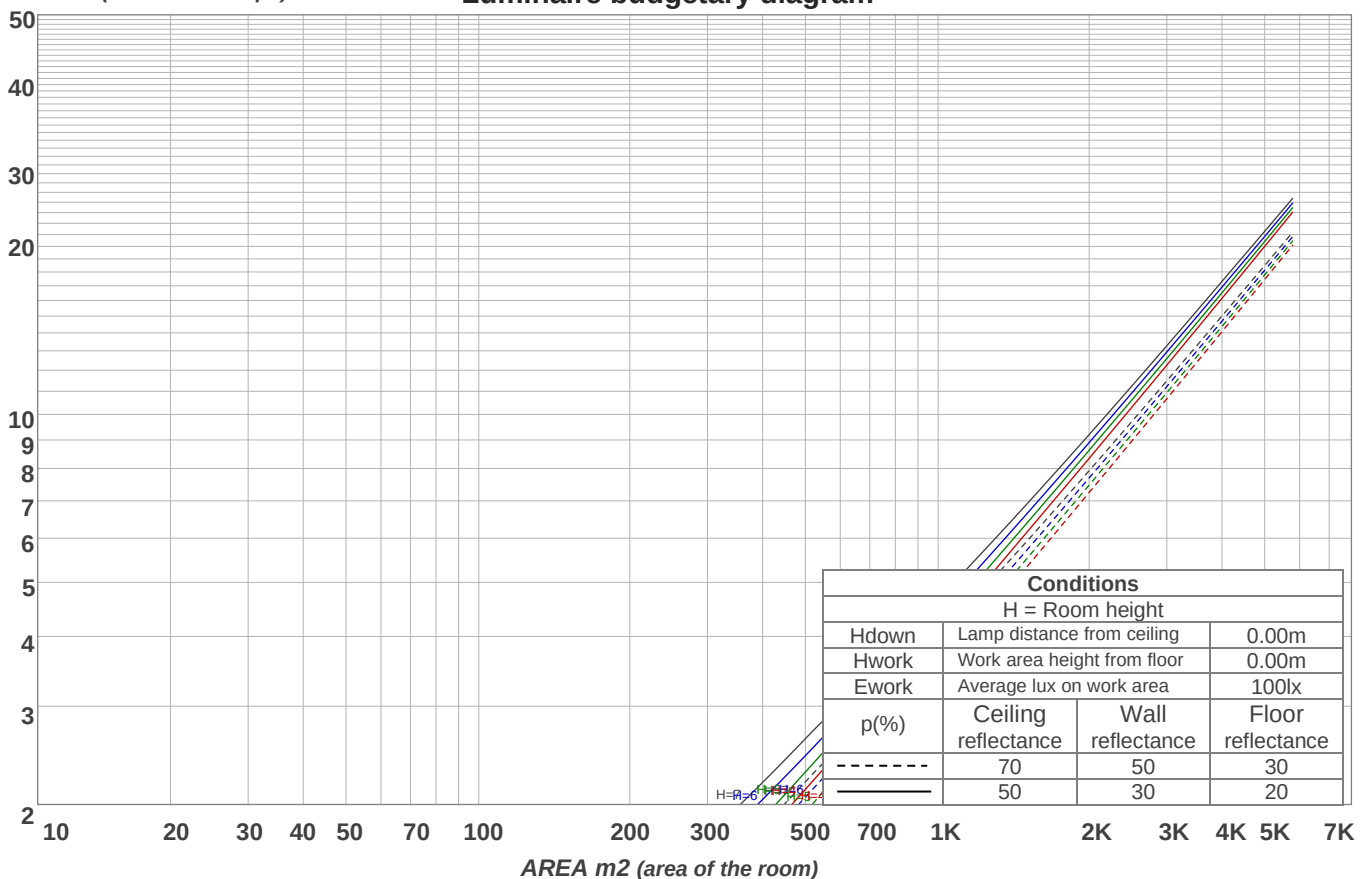

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
1016 lm	2944 lm	4559 lm	5615 lm	5843 lm	5095 lm	3597 lm	1578 lm	205 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
5.67 lm	6.78 lm	8.48 lm	10.4 lm	11.0 lm	10.3 lm	8.41 lm	5.66 lm	1.97 lm




Road Report

LCS table


BUG rating:	B4 U3 G4	
Forward light	Lumens	Lumens %
Low(0-30):	4256	13.9%
Medium(30-60):	8248	27%
High(60-80):	2589.8	8.5%
Very high(80-90):	109.5	0.4%
Back light		
Low(0-30):	4257.1	13.9%
Medium(30-60):	8288.9	27.2%
High(60-80):	2590.8	8.5%
Very high(80-90):	112.4	0.4%
Uplight		
Low(90-100):	6.2	0%
High(100-180):	63	0.2%

LCS graph

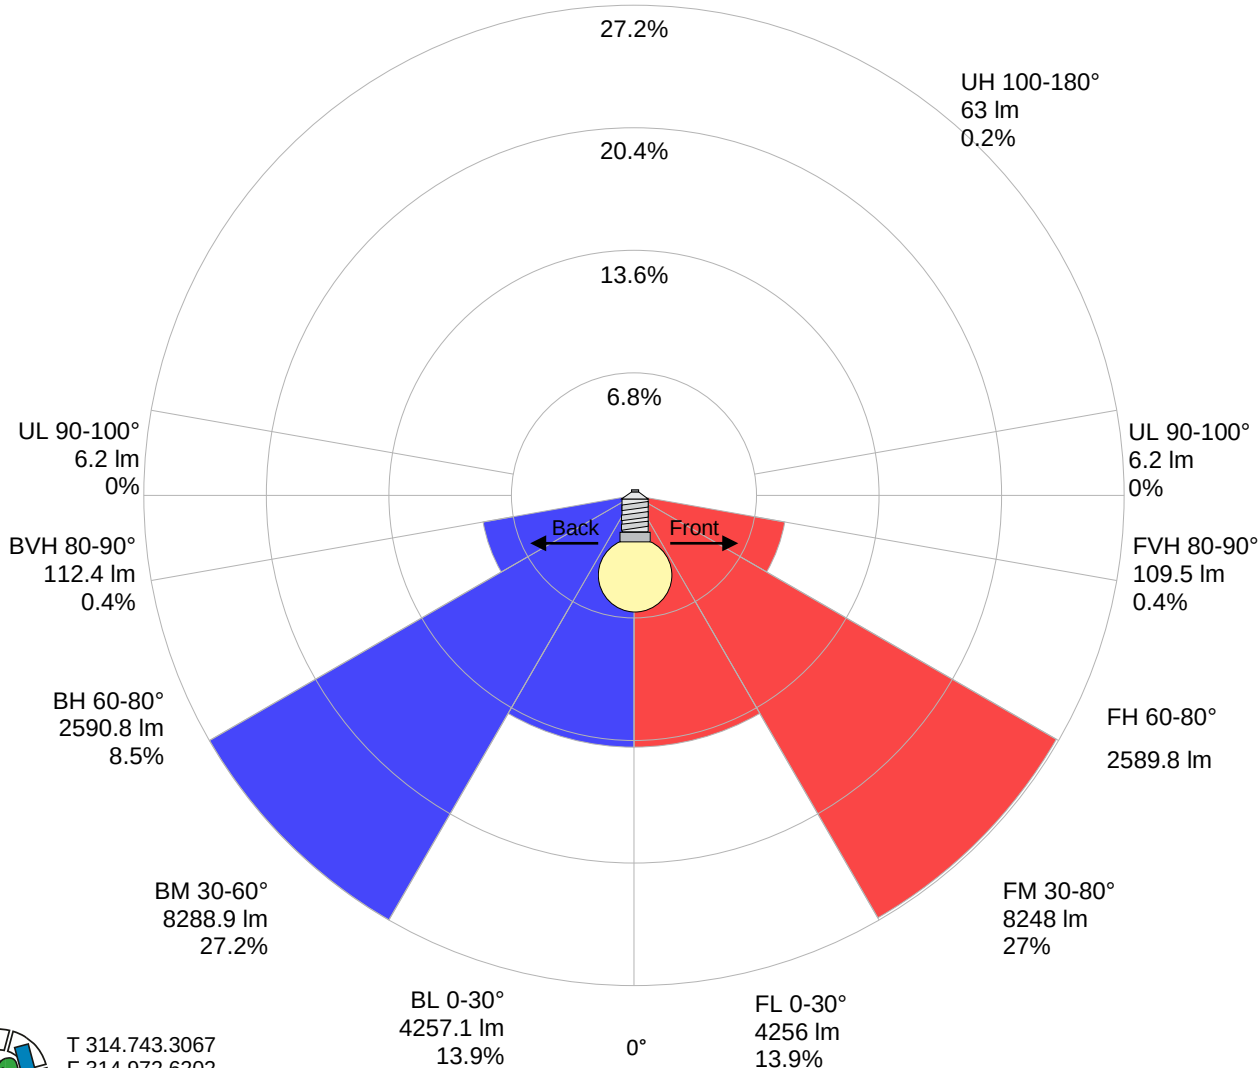

Stabilization

Warmup curve

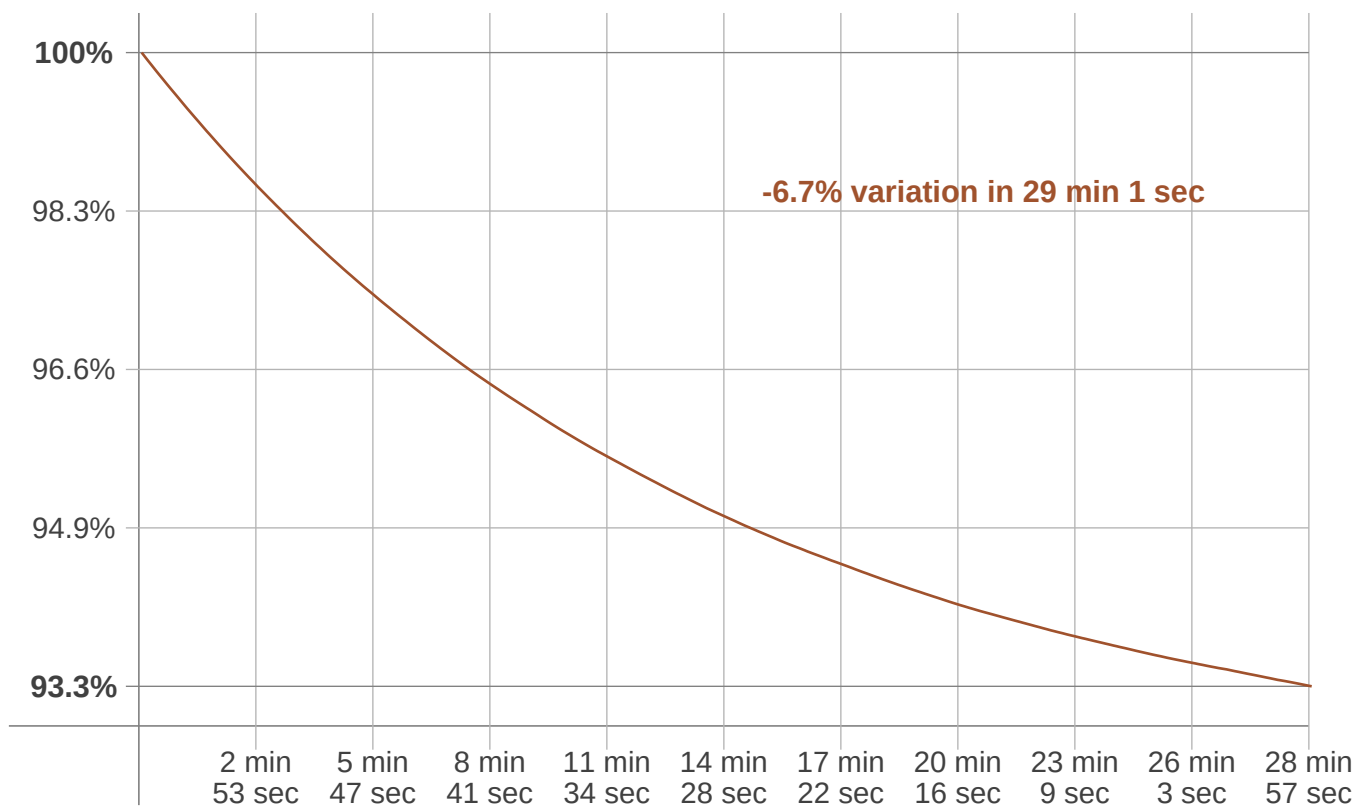

Warmup result

Warmup time:	29 min 1 sec
Warmup variation	-6.8%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5014 K	+108 K	5122 K

Output change

Output start	Output change	Output end
32709 lm	-2187 lm	30522 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

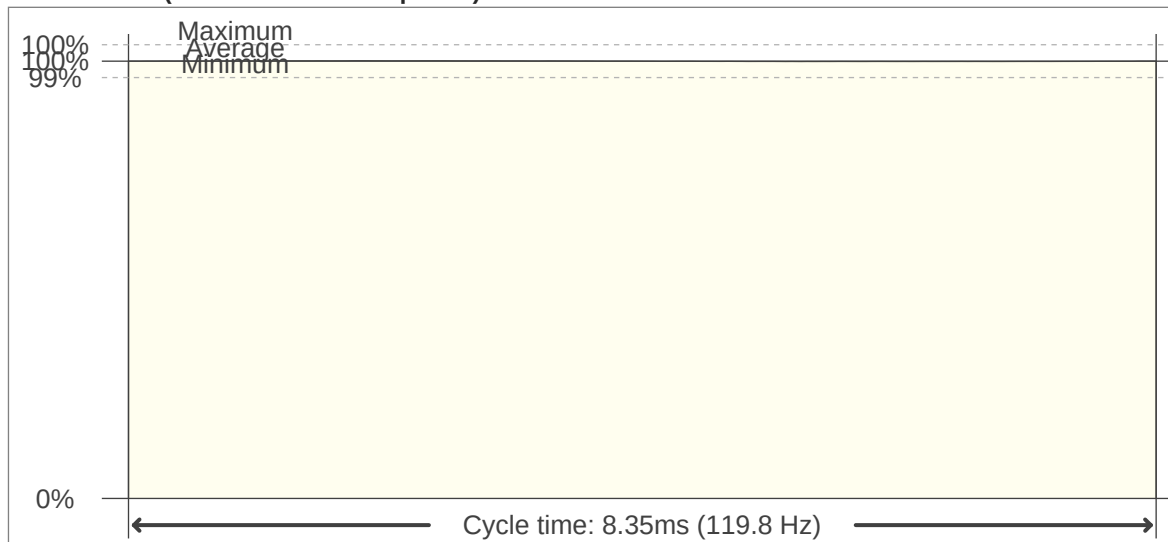

Flicker FFT (frequency scope of flicker curve)

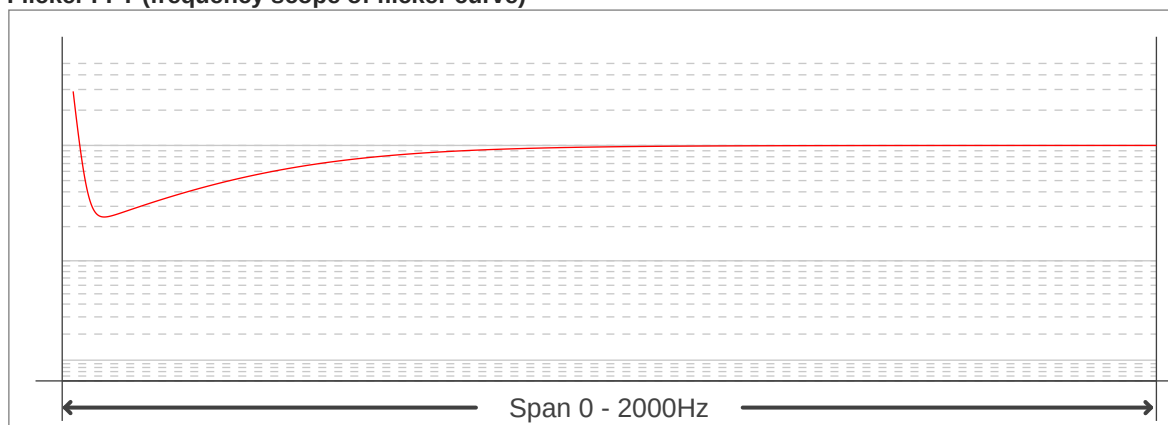

Flicker results:

Flicker frequency:	119.76 Hz
Flicker index:	0
Flicker percentage:	0.11 %
SVM: (Visual flicker)	0

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

