

Light efficiency:

120 Lumen/Watt

Output: 9387 lm

Light quality:

CRI: 82.6


Peak: 3281 cd

Color temperature:

5274 K

Power: 78.4 W

PF: 0.99

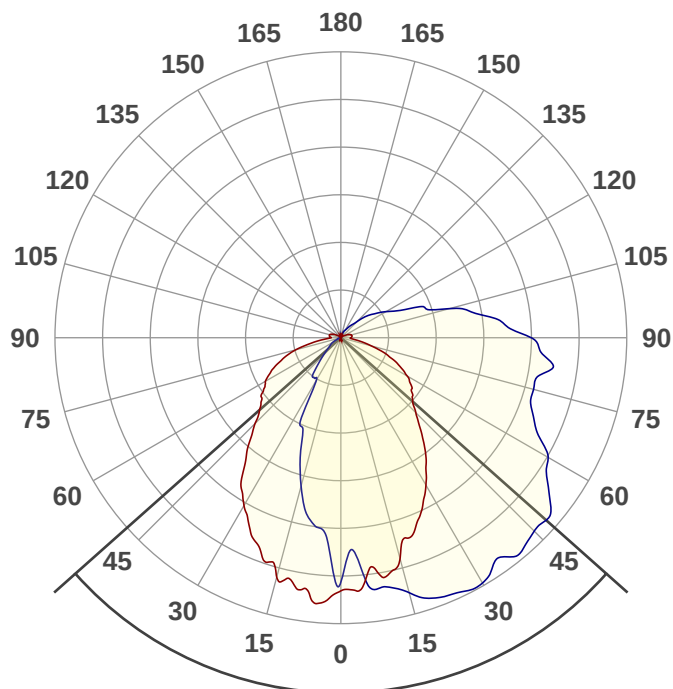

Product name:

WPG-50K80W-S

Date and time:

9/27/2019 2:55:12 PM

Beam angle

96.7°




CIE 1931


x: 0.338

y: 0.348

Spectra

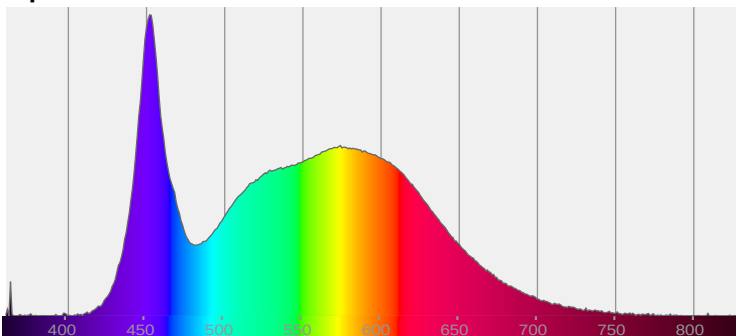

Power

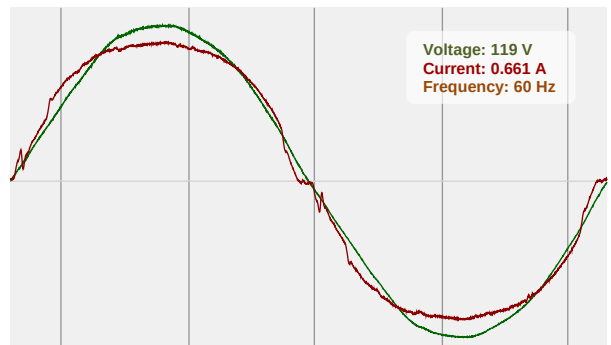



T 314.743.3067

F 314.972.6202


email: commercial-sales@superbrightleds.com

www.superbrightleds.com/


Color Specifications

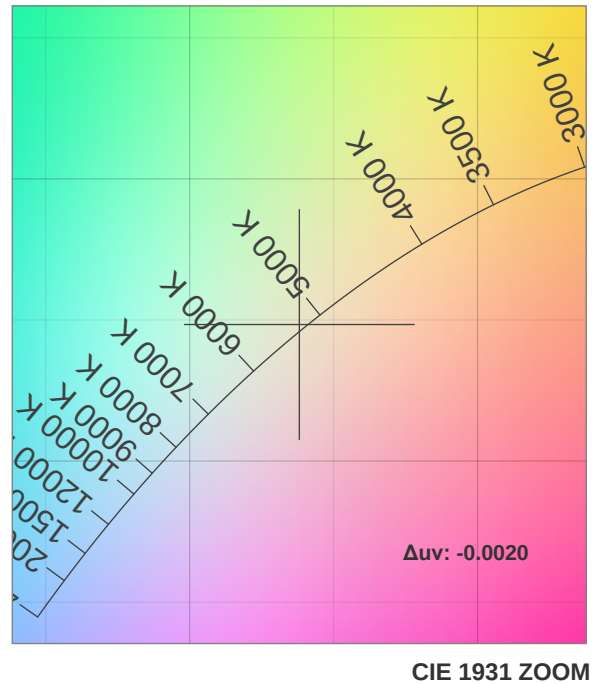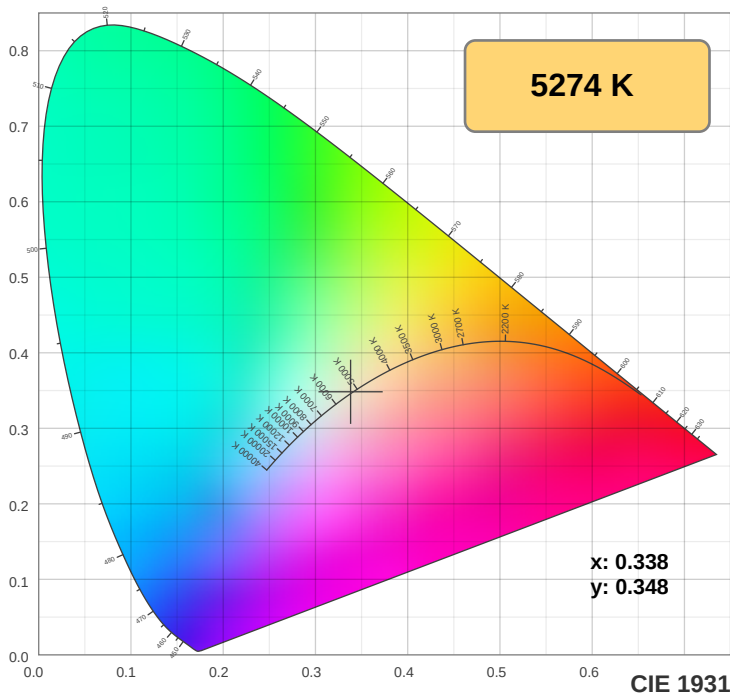

TM30: 80.5

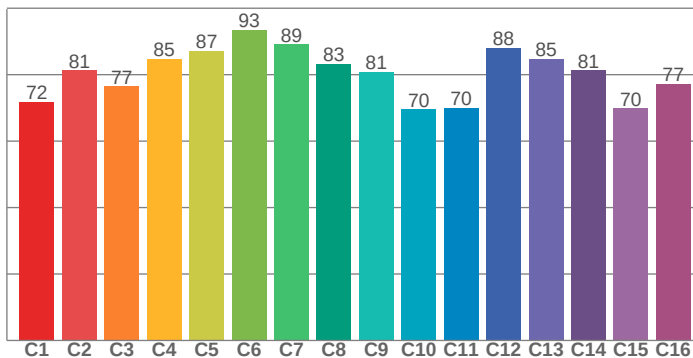

CRI: 82.6 (R1-R8)

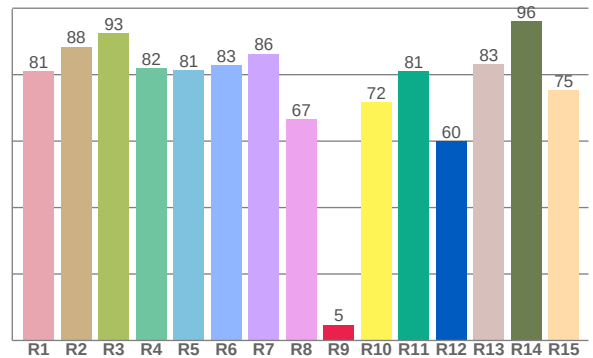

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81.0	88.4	92.5	82.0	81.4	82.9	86.3	66.5	4.7	71.7	80.9	60.0	83.1	96.1	75.3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
71.7	81.3	76.5	84.8	87.1	93.4	89.1	83.3	80.9	69.5	70.0	88.1	84.7	81.2	69.9	77.2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
82.2	98.2	75.2	70.7	77.5	81.0	84.6	88.6	96.4	85.1	80.3	78.9	79.2	68.9	73.9

CQS: 79.7

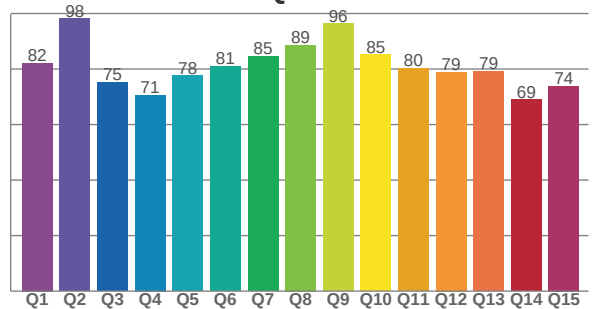

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5274 K	82.6	4.7	80.5	94.0	79.7	0.338	0.348	0.208	0.321	-0.0020



T 314.743.3067

F 314.972.6202

email: commercial-sales@superbriteleds.com

www.superbriteleds.com/

TM30 Report







Rf 80.5

Fidelity index Rf


Rg 94.0

Gamut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	72	-13%	0%
2	81	-8%	6%
3	77	-5%	11%
4	85	-1%	7%
5	87	-1%	4%
6	93	1%	-1%
7	89	-5%	-2%
8	83	-9%	1%
9	81	-10%	11%
10	70	-5%	16%
11	70	3%	16%
12	88	5%	4%
13	85	8%	-6%
14	81	4%	-9%
15	70	-1%	-20%
16	77	-5%	-12%

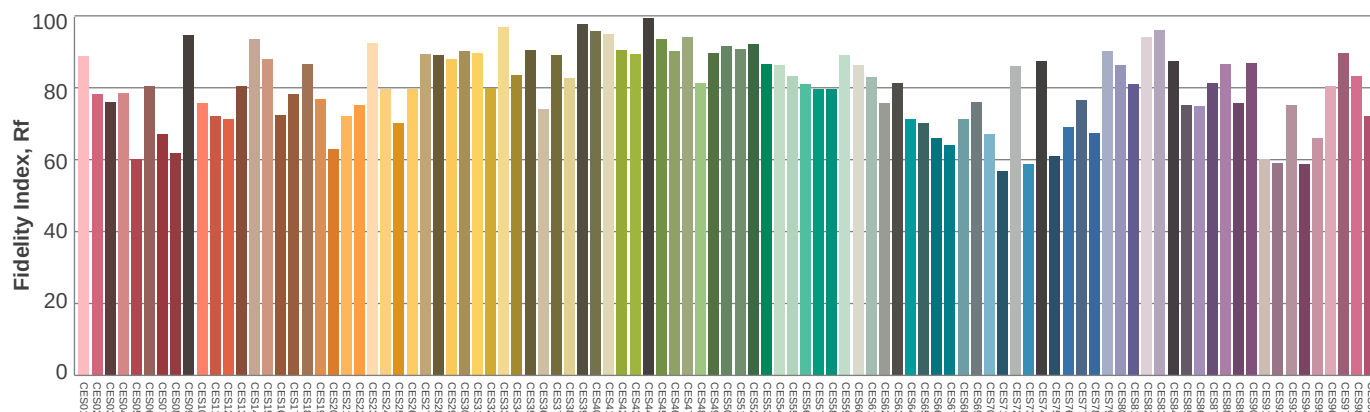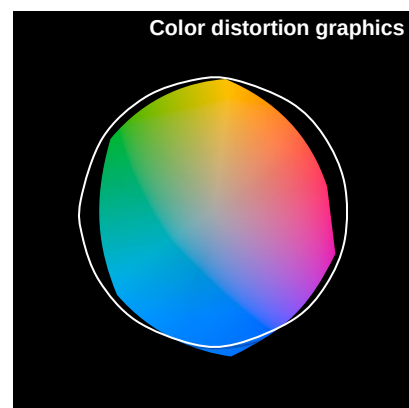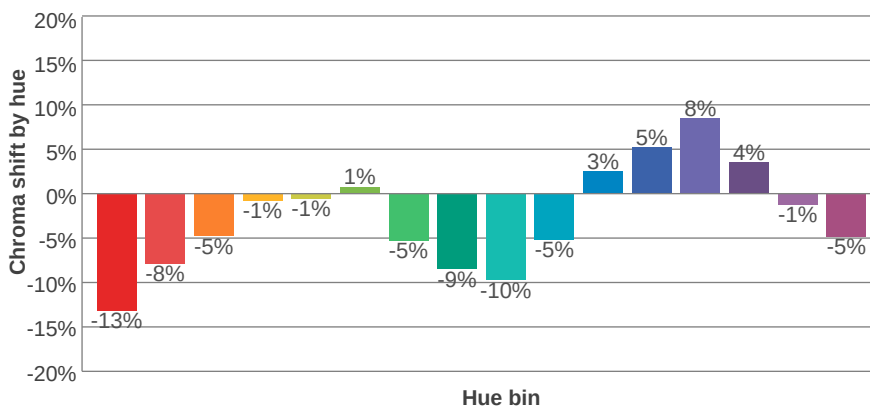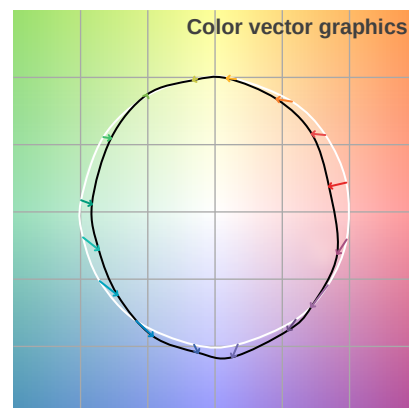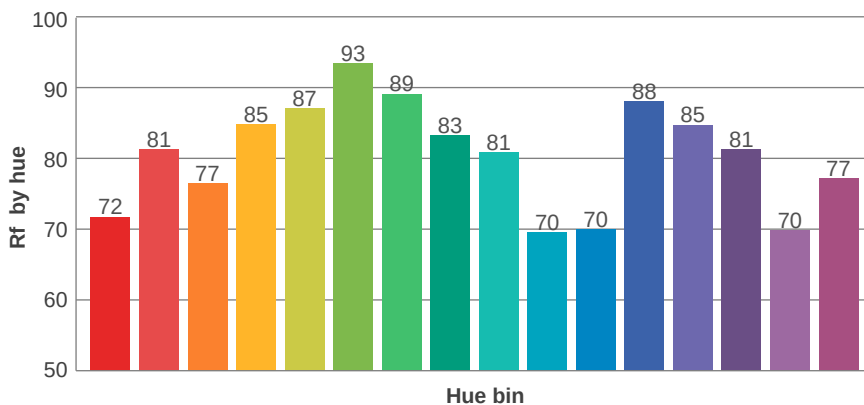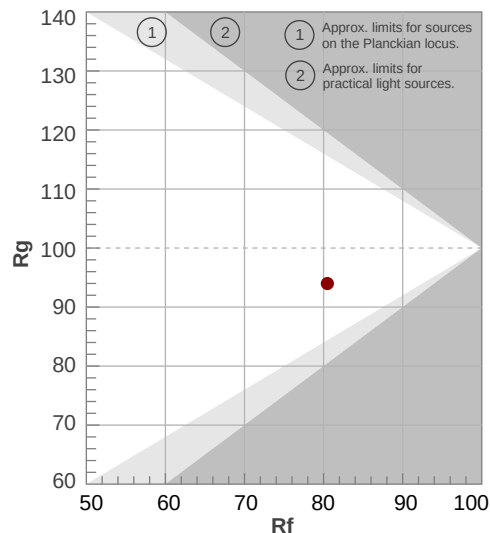

Illumination

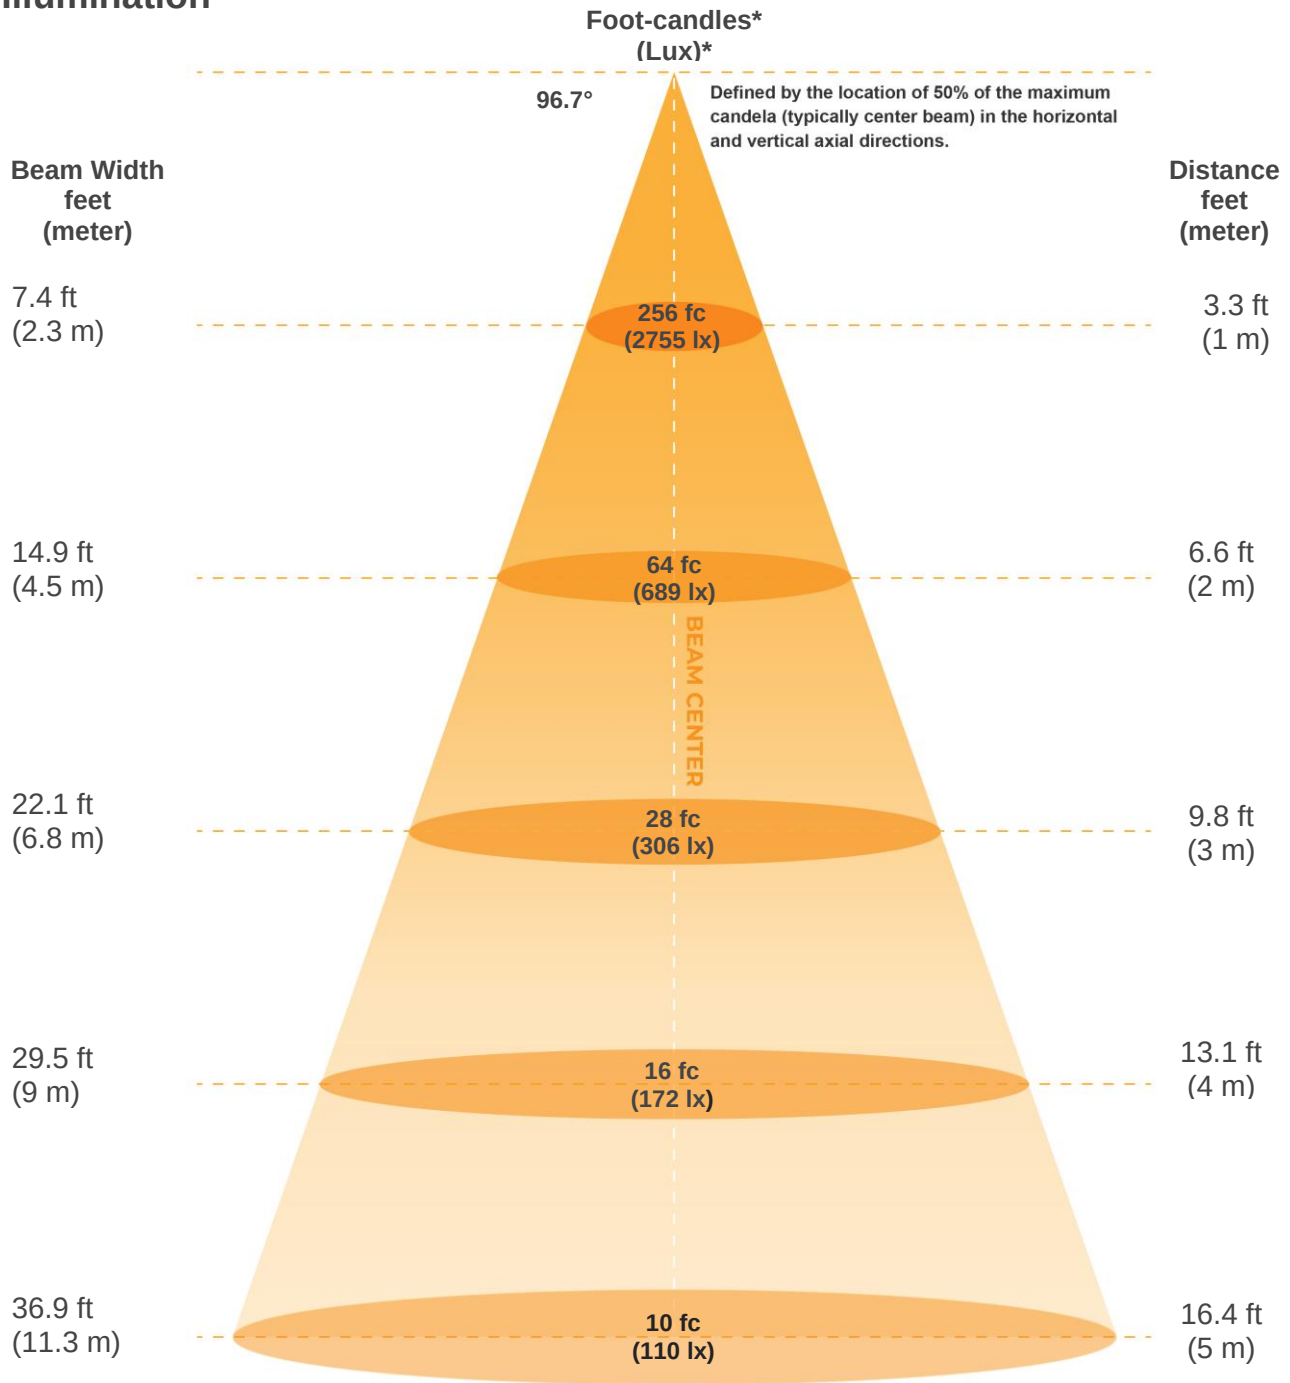

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2755lx	689lx	306lx	172lx	110lx	77lx	56lx	43lx	34lx	28lx	23lx	19lx	16lx	14lx	12lx	11lx	10lx	9lx	8lx	7lx
256fcd	64fcd	28.4fcd	16fcd	10.2fcd	7.1fcd	5.2fcd	4fcd	3.2fcd	2.6fcd	2.1fcd	1.8fcd	1.5fcd	1.3fcd	1.1fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
96.7°	169.9°	219.7°	57.0%	38.8%




Light Planning

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	116	116	116	116	111	111	111	111	103	103	103	95	95	95	88	88	88	85
1	102	96	91	86	98	93	88	83	85	82	78	79	76	73	73	70	68	65
2	92	83	75	68	88	80	72	66	73	68	63	68	63	59	63	59	55	52
3	84	72	63	56	80	69	61	55	64	57	52	59	54	49	55	50	46	43
4	76	64	54	47	73	61	53	46	57	49	44	53	47	42	49	44	39	37
5	70	57	47	40	67	55	46	39	51	43	38	47	41	36	44	38	34	32
6	65	51	42	35	62	49	41	34	46	38	33	43	36	31	40	34	30	28
7	60	46	37	31	57	45	36	30	42	34	29	39	33	28	36	31	27	24
8	56	42	33	27	53	41	33	27	38	31	26	36	29	25	34	28	24	22
9	52	39	30	25	50	37	30	24	35	28	23	33	27	22	31	26	22	20
10	49	36	28	22	47	35	27	22	33	26	21	31	25	20	29	23	20	18

LAMPS (number of lamps)

Luminaire budgetary diagram

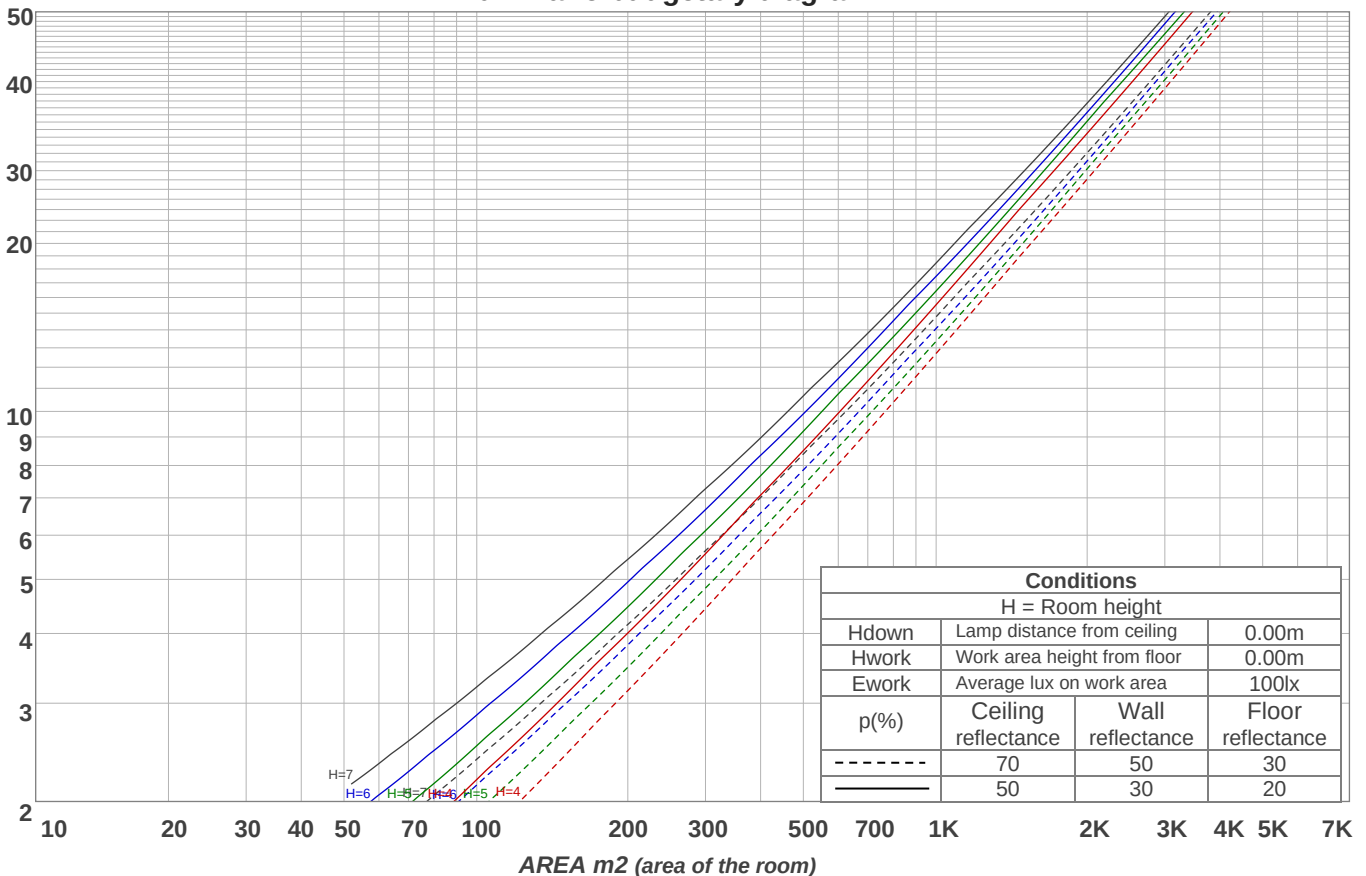

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
239 lm	684 lm	984 lm	1141 lm	1184 lm	1116 lm	1001 lm	875 lm	767 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
572 lm	371 lm	225 lm	128 lm	60.6 lm	25.6 lm	9.90 lm	1.94 lm	0.510 lm




Road Report

LCS table


BUG rating:	B2 U4 G3	
Forward light	Lumens	Lumens %
Low(0-30):	935.4	10%
Medium(30-60):	1669.3	17.8%
High(60-80):	904.4	9.6%
Very high(80-90):	368.3	3.9%
Back light		
Low(0-30):	972.6	10.4%
Medium(30-60):	1772.3	18.9%
High(60-80):	971.6	10.4%
Very high(80-90):	397.8	4.2%
Uplight		
Low(90-100):	572	6.1%
High(100-180):	823.7	8.8%

LCS graph

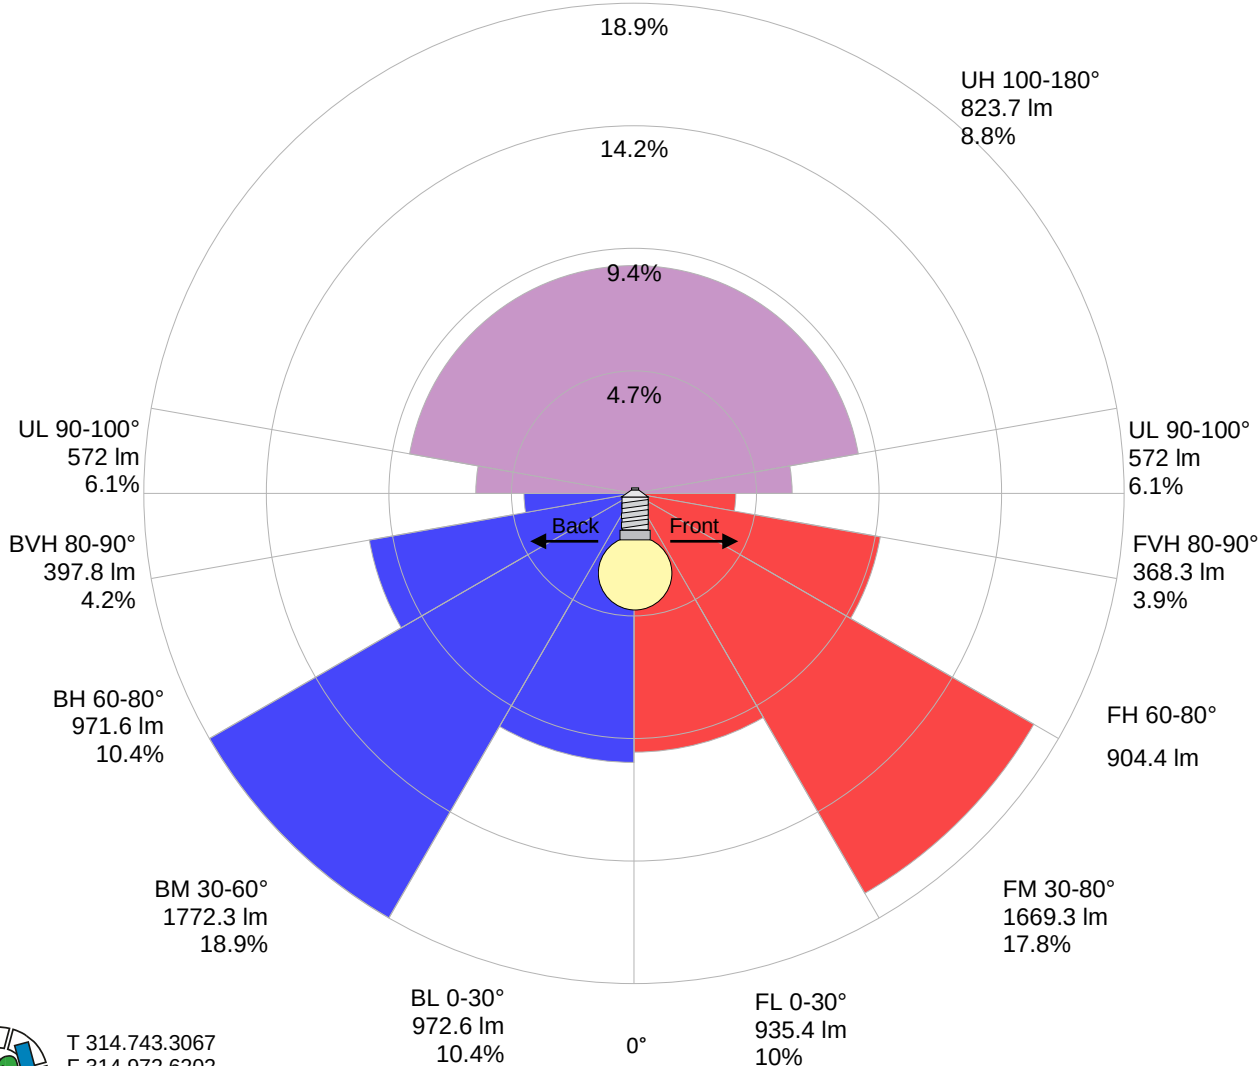

Stabilization

Warmup curve

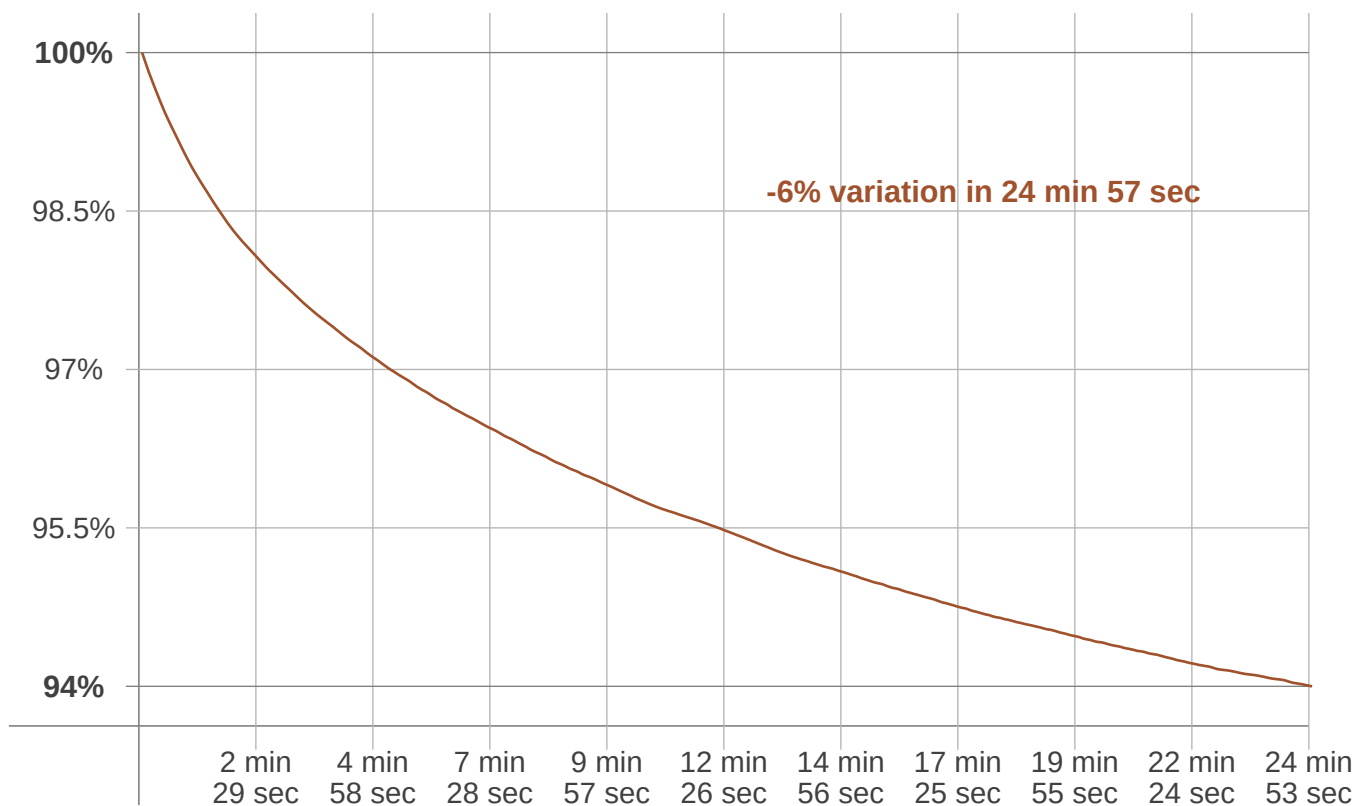

Warmup result

Warmup time:	24 min 57 sec
Warmup variation	-6.1%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5173 K	+101 K	5274 K


Output change

Output start	Output change	Output end
9966 lm	-579 lm	9387 lm




Flicker


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

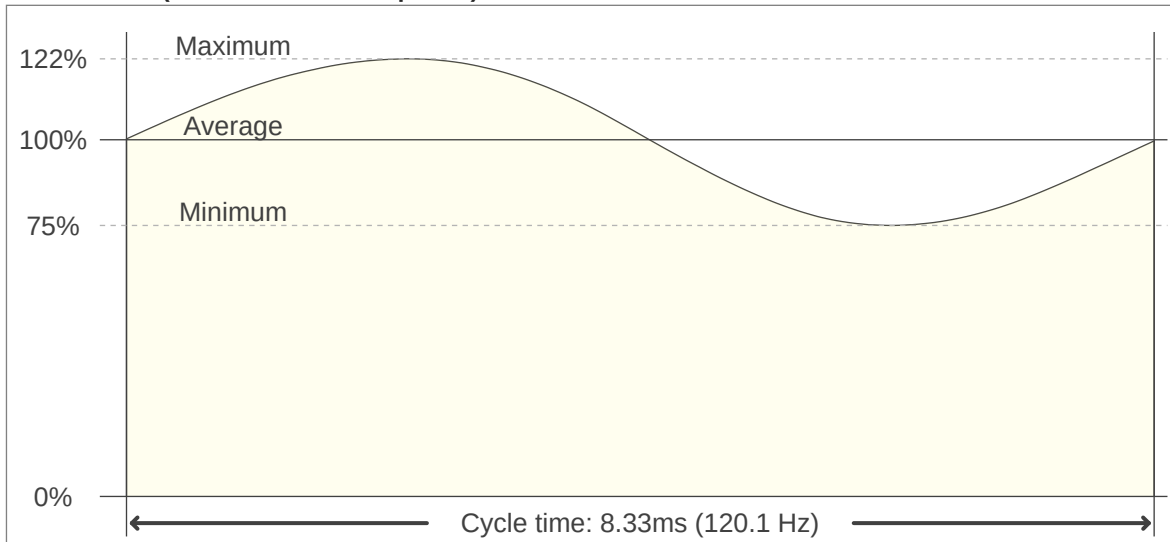

Flicker FFT (frequency scope of flicker curve)

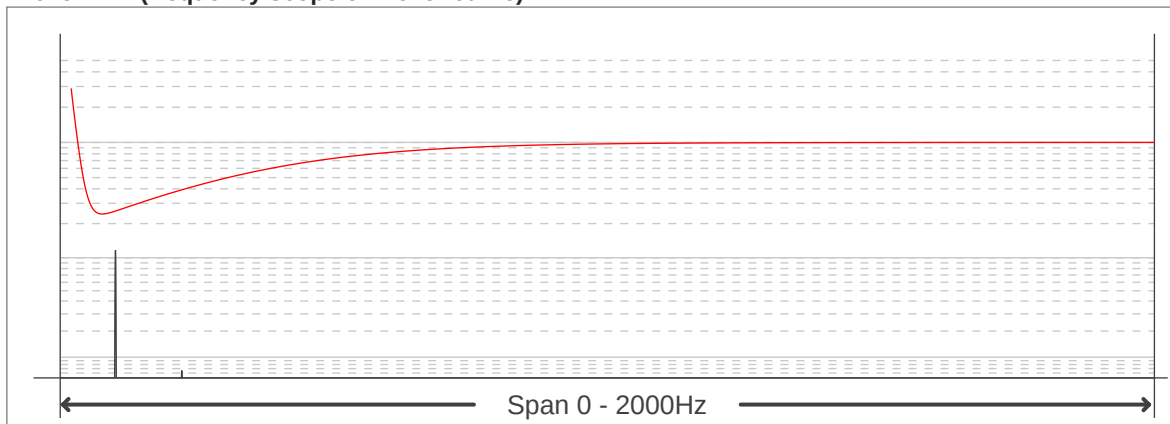

Flicker results:

Flicker frequency:	120.12 Hz
Flicker index:	0.07
Flicker percentage:	23.56 %
SVM: (Visual flicker)	0.85

Flicker conditions:

Sample rate:	40000 samples/second
--------------	----------------------

