

Important: Read all instructions prior to installation.

CRN2 and CRN4 Series

LED Corner Light



CRN2-30W-150K-C-FL-CT-FA

Safety and Notes


- Product should be installed in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- Intended for indoor use only.
- Do not mount near radiant heat sources/heaters.

Specifications

Model	CRNx-xW-150K-C-FL-CT-FA
Operating Temperature	-4°–104° F (-20°–40° C)
IP Rating	IP20

Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

Wiring Diagram

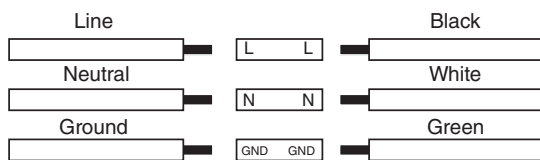

Installation

1. Disconnect supply power before installation.
2. Open fixture, mount the base, and set CCT and wattage selection switches.
3. Hang the inner LED tray by the safety cables.
4. Connect wiring.
5. Push LED tray into place.
6. Install lens.
7. Reapply supply power.

