

Important: Read all instructions prior to installation.

Knuckle-mount LED Flood Light Fixture

Safety and Notes

- Product should be installed and serviced in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.




FLCKM-40K30

Specifications

Specifications	FLCKM-xK10	FLCKM-xK20	FLCKM-xK30	FLCKM-xK50
Operating Temperature	-4°–104° F (-20°–40° C)			
Environmental Rating	IP65			
Fixture Weight	1 lb 2 oz (0.52 kg)	1 lb 11 oz (0.76 kg)	2 lb 11 oz (1.22 kg)	4 lb 2 oz (1.87 kg)

Check product label for specific electrical specifications related to installation.
Improper installation will void warranty.


Wiring Diagram

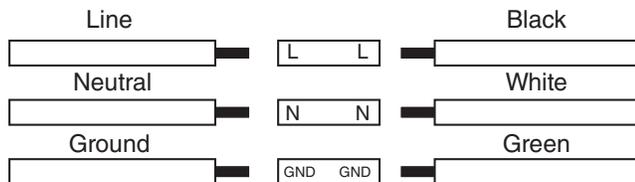

Important: Read all instructions prior to installation.

Knuckle-mount LED Flood Light Fixture

Installation Instructions

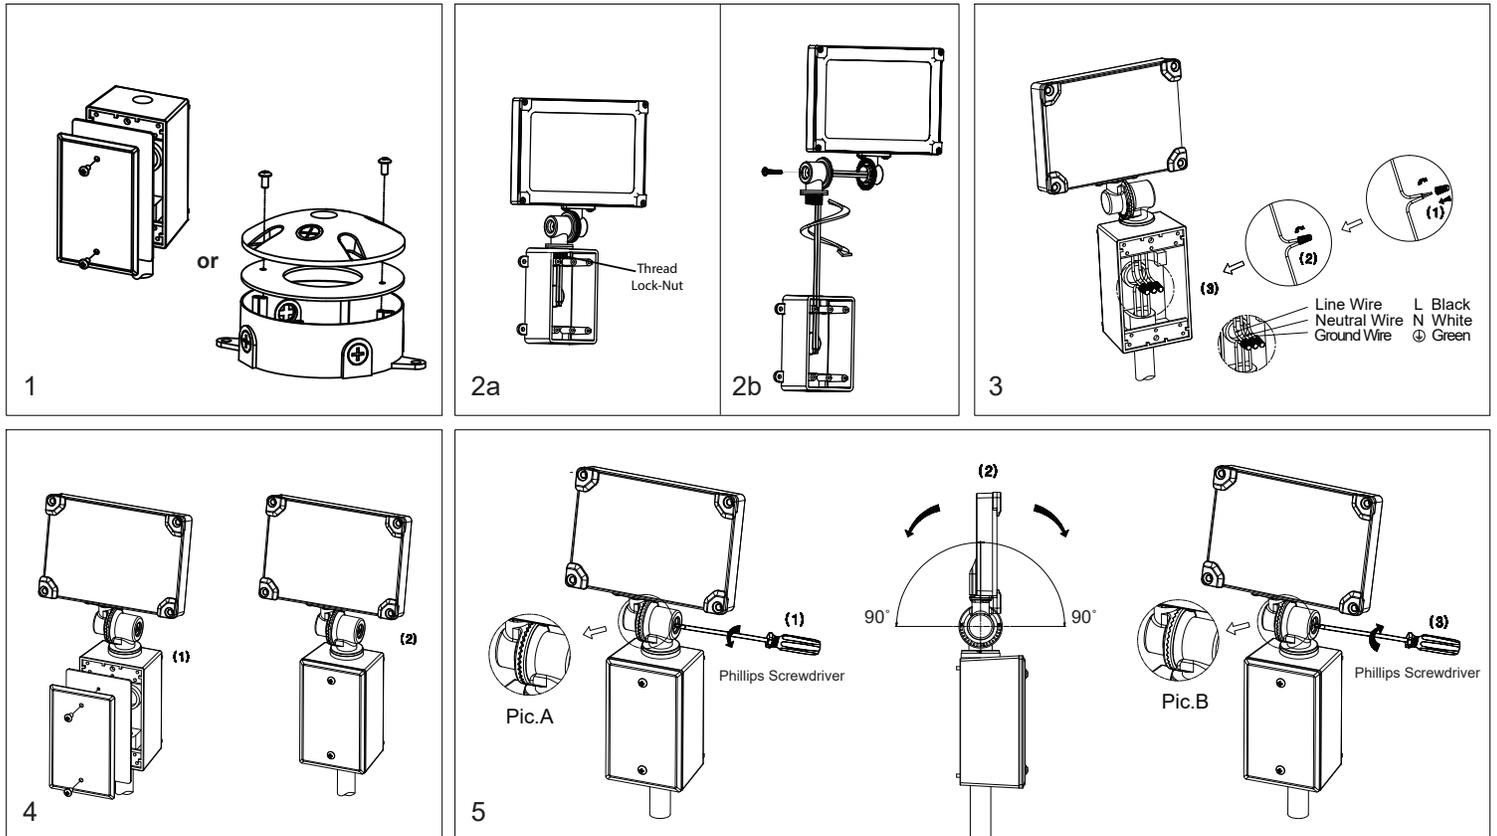

1. Use a screwdriver to remove junction box cover.
2. Secure the light by using a locknut on inside of junction box (Fig. 2a) or by threading the knuckle mount into the junction box (Fig. 2b). If the knuckle mount is being threaded into junction box, loosen and remove screw on knuckle mount to separate it from light.
3. Connect wiring. (Fig. 3)
4. Reinstall junction box cover. (Fig. 4)
5. Loosen screw on knuckle mount and adjust the light to the desired angle. Once in place, tighten screw securing light in position. (Fig. 5)




Important: Read all instructions prior to installation.


Knuckle-mount LED Flood Light Fixture

Dimensional Diagrams

FLCKM-xK10

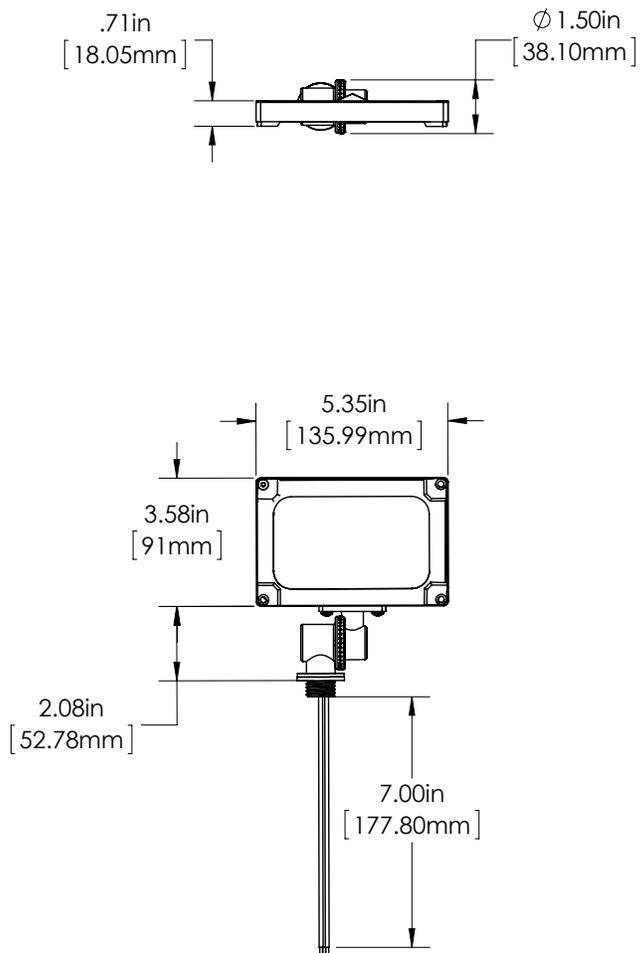

FLCKM-xK20

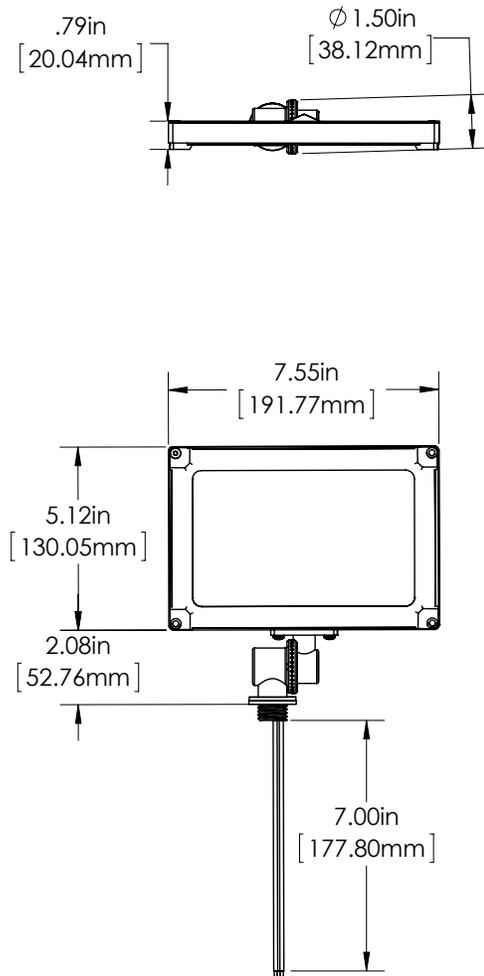


Important: Read all instructions prior to installation.

Knuckle-mount LED Flood Light Fixture

Dimensional Diagrams

FLCKM-xK30

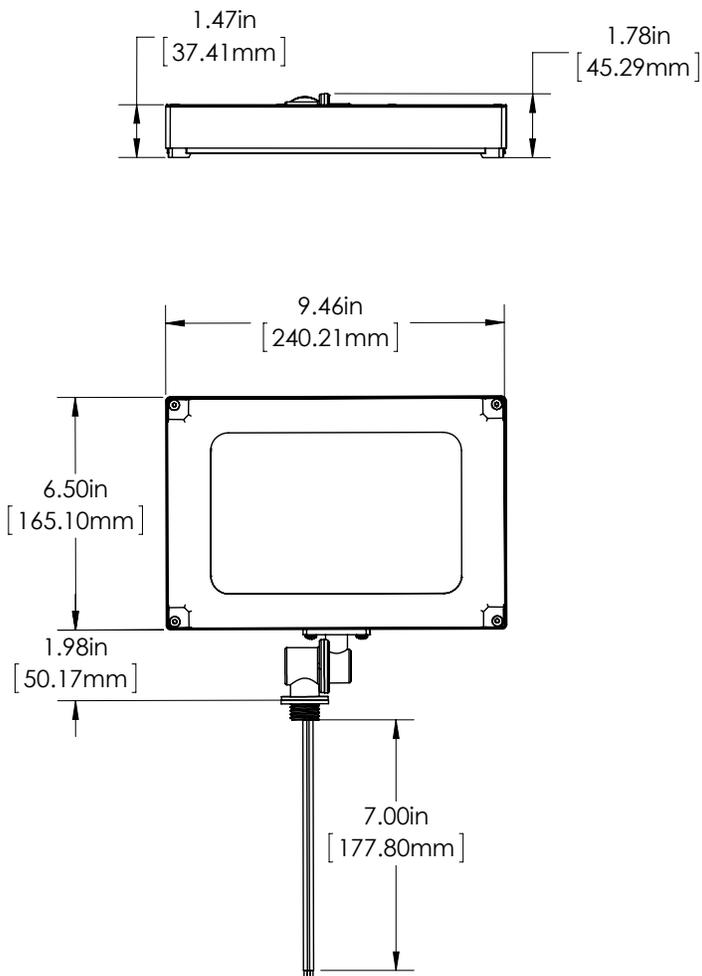

FLCKM-xK50

