

Linkable Linear LED Light Fixture

Integrated T5 series

Linear LED lights are heavy-duty, super-bright, low-voltage fixtures. Perfect for RV lighting, boat, trailers, and off-grid lighting—the T5 Tube Lights have powerful LEDs, high lumen outputs, and very long lifetimes. Wide DC voltage range makes them suitable for 12- and 24-volt applications. Can also be used in high-voltage applications with our 12- or 24-volt power supplies. These LED tube lights link end to end with the optional interconnect cables.

Specifications

IT5-NW24	
Intensity	800 lumen
Operating Voltage Range	12-36 VDC
Beam Angle	140 degree
LED Type	2835 SMD
Number of LEDs	48 LEDs
Color Temperature	4000K
CRI	73 CRI
Operating Temperature	-4 ~ 131°F (-20 ~ 55 °C)
Total Power Consumption	10 Watts
IP Rating	IP40
Max Run	3 (180W)
Warranty	2 year

IT5-NW36	
Intensity	1300 lumen
Operating Voltage Range	12-36 VDC
Beam Angle	140 degree
LED Type	2835 SMD
Number of LEDs	72 LEDs
Color Temperature	4000K
CRI	73 CRI
Operating Temperature	-4 ~ 131°F (-20 ~ 55 °C)
Total Power Consumption	16 Watts
IP Rating	IP40
Max Run	3 (180W)
Warranty	2 year

IT5-NW48	
Intensity	1650 lumen
Operating Voltage Range	12-36 VDC
Beam Angle	140 degree
LED Type	2835 SMD
Number of LEDs	96 LEDs
Color Temperature	4000K
CRI	73 CRI
Operating Temperature	-4 ~ 131°F (-20 ~ 55 °C)
Total Power Consumption	20 Watts
IP Rating	IP40
Max Run	3 (180W)
Warranty	2 year

IT5-NW24



IT5-NW36






IT5-NW48






Accessories

IT-I30, IT-I100

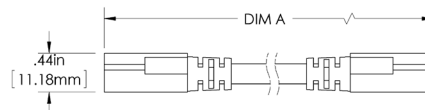

DIM A	PART NUMBER
100CM	IT-I100
30CM	IT-I30


IT-P100

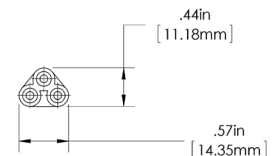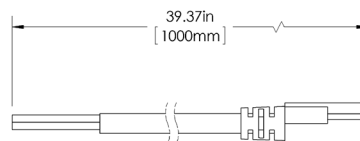

Ordering Information

LED Product	Color Temperature / Length
IT5 - Integrated T5	NW24 - Natural White, 24 inches NW36 - Natural White, 36 inches NW48 - Natural White, 48 inches

Dimensional Drawing

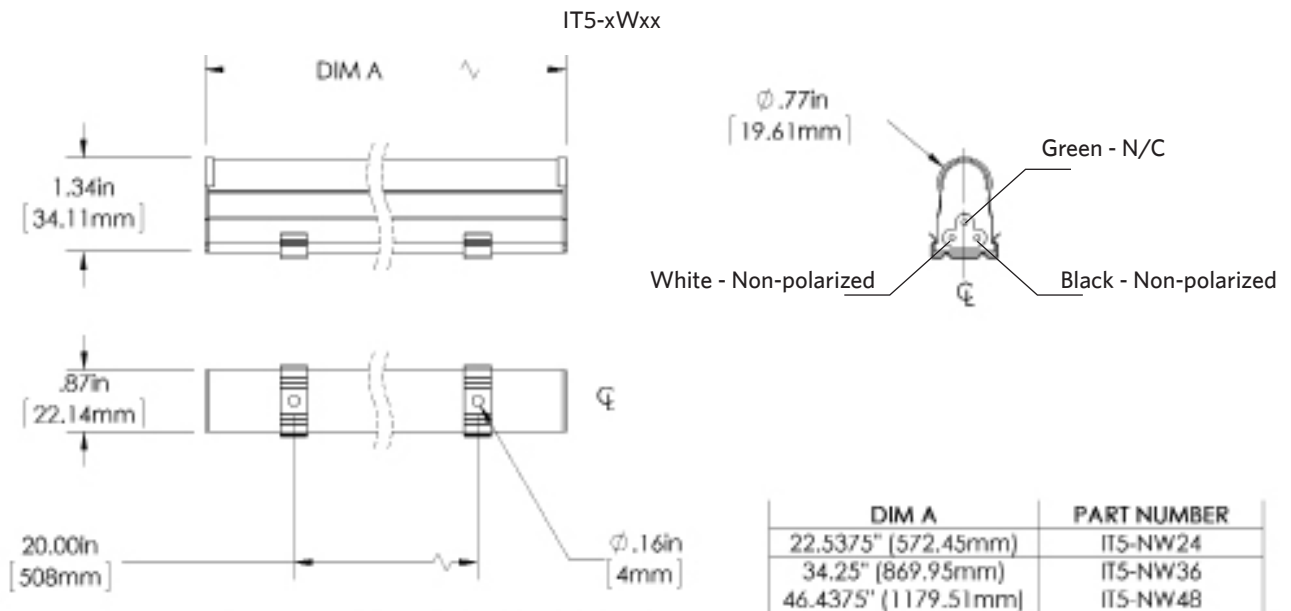

NOTE: MOUNTING BRACKETS CAN BE ATTACHED ANYWHERE ON THE ALUMINUM PROFILE

