


# LLS LED Strip Sheets

Strip Sheet Specifications

Project \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

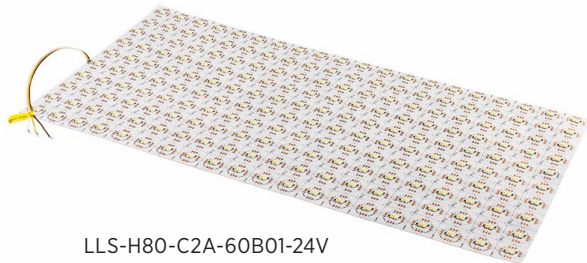

LLS-H80-C2A-60B01-24V

## FEATURES

- 24 VDC input
- 80+ CRI
- Single white and tunable white options
- Highly adaptable design accommodates virtually any application
- LED lifetime of 50,000 hours (L70)
- 3M adhesive backing
- Operating temperature of -4°-113° F (-20°-45° C)
- IP20 environmental rating

## APPLICATIONS

Some common applications include sign lighting, bias lighting, cove lighting, task lighting, backlighting, accent lighting, and under cabinet lighting.

## ACCESSORIES

Power Supplies



Controllers and Switches



## AVAILABLE VERSIONS<sup>1</sup>

Single CCT

- ☐ LLS-A30K80-C1A-30A01-24V
- ☐ LLS-A40K80-C1A-30A01-24V
- ☐ LLS-A50K80-C1A-30A01-24V

Selectable CCT

- ☐ LLS-H80-C2A-60B01-24V

## SAMPLE PART NUMBER BREAKDOWN

# LLS-A40K80-C1A-30A01-24V

FAMILY / CATEGORY / COLOR				LED TYPE / SEGMENT		IP RATING	SIZE / DENSITY / VOLTAGE			
LLS	A	40K	80	C	1	A	30	A	01	24V
Strip Type	Strip Type	CCT	CRI	LED Type	LED/Segment	IP Rating	Wattage	LEDs/Sheet	Sheet Size	Voltage
LLS: Strip Sheet	A: Single White	30K: 3000K 40K: 4000K 50K: 5000K	80: 80-84	C: 2835	1: 1 LED/seg	A: IP20	30: 30 W	A: 288	01: 18.9 x 9.4 in. (480 x 240 mm)	24V: 24 V
	H: Tunable White	N/A			2: 2 LEDs/seg		60: 60 W	B: 200		

## SPECIFICATIONS

Model LLS-	A30K80-C1A-30A01-24V	A40K80-C1A-30A01-24V	A50K80-C1A-30A01-24V	H80-C2A-60B01-24V
Power Consumption	30 W (one full sheet)			60 W (one full sheet)
Current Draw	1.25 A (one full sheet)			2.5 A (one full sheet)
CCT	3000K	4000K	5000K	2700K-6500K
Brightness	2,620 lm (one full sheet)	2,760 lm (one full sheet)	2,760 lm (one full sheet)	5,280 lm (one full sheet)
Efficacy	87 lm/W	92 lm/W		88 lm/W
Beam Angle	120°			
Max Run	32.8 ft (10 m) single column/row max run <sup>1</sup> 7 full sheet max run <sup>1</sup>			16.4 ft (5 m) single column/row max run <sup>1</sup> 3 full sheet max run <sup>1</sup>

<sup>1</sup>Max run listed is using a single power supply connected at one end of the run.



T 866.811.5550

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/cat/industrial-led-lighting/



Specifications are subject to change without notice.


# LLS LED Strip Sheets

## Strip Sheet Specifications

### DIMENSIONAL DRAWINGS


#### LLS-A30K80-C1A-30A01-24V

- 32.8 ft (10 m) single column/row max run<sup>2</sup>
- 7 full sheet max run<sup>2</sup>

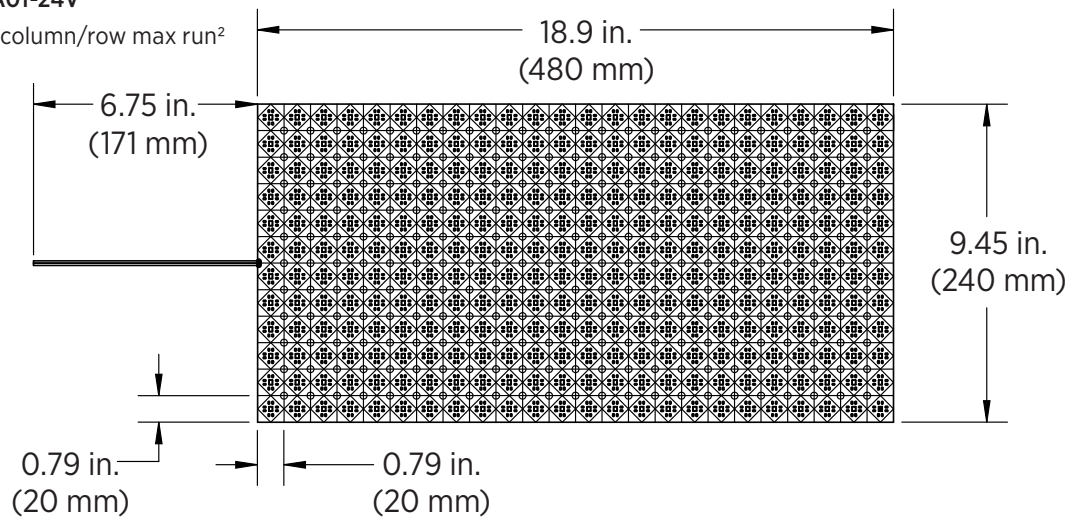

#### LLS-H80-C2A-60B01-24V

- 16.4 ft (5 m) single column/row max run<sup>2</sup>
- 3 full sheet max run<sup>2</sup>

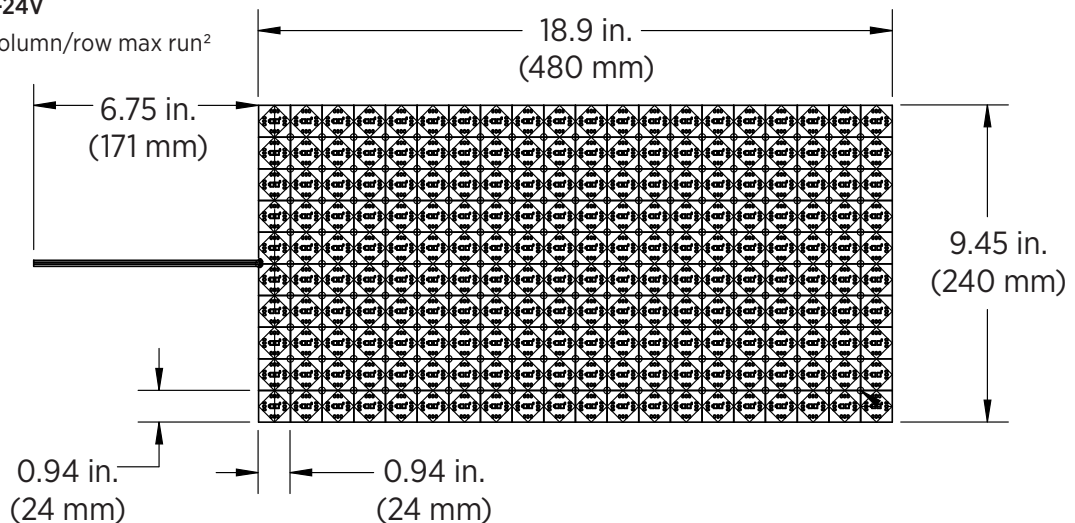

Note: The strip height for all strip sheets shown is 0.06 in. (1.5 mm).

<sup>2</sup>Max run listed is using a single power supply connected at one end of the run.



Specifications are subject to change without notice.

T 866.811.5550

F 314.972.6202

email: [commercial-sales@superbrightleds.com](mailto:commercial-sales@superbrightleds.com)

[www.superbrightleds.com/cat/industrial-led-lighting/](http://www.superbrightleds.com/cat/industrial-led-lighting/)




# LLS LED Strip Sheets

## Strip Sheet Specifications



### CUTTING SEGMENTS

Strip sheets can be cut into many custom shapes. When cutting strips, it is important to use only the pre-marked cut lines on the sheet and also to maintain electrical contact. The images below represent the smallest possible linear routing types. The green box represents strip routing types that work by preserving the electrical connection, and the one in red represents a routing type that will not function correctly due to interruptions of the electrical connection.

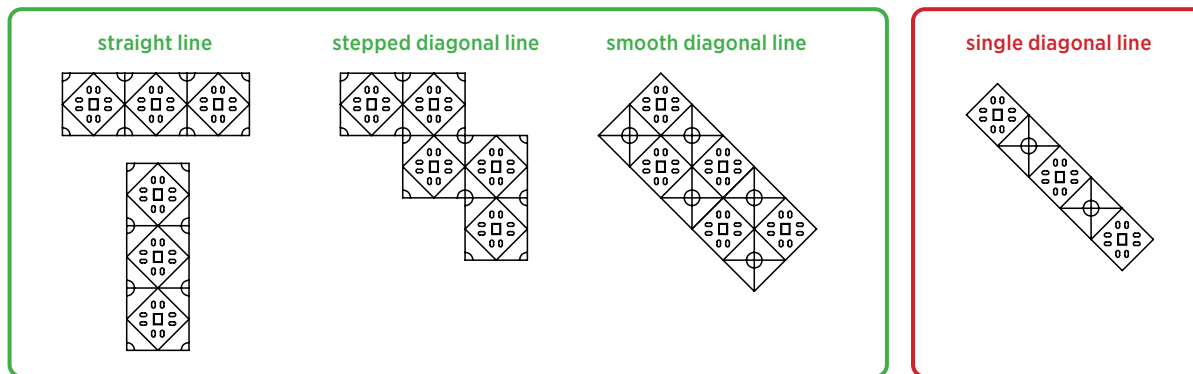

### STRIP FLEXIBILITY

Hard bends can be made up to 90° in either direction.

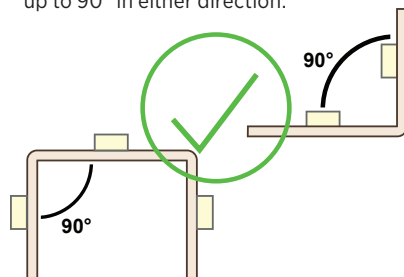


Soft bends less than 1.5 in. may damage circuit traces and void warranty.



Bending strip sheets or sections at sharp angles will damage circuit traces and void warranty.

Bending strip sheets or sections on horizontal plane will damage circuit traces and void warranty.

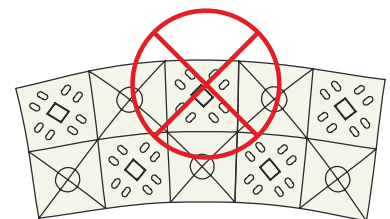

Specifications are subject to change without notice.

T 866.811.5550

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/cat/industrial-led-lighting/




## LLS LED Strip Sheets

### Strip Sheet Specifications

#### APPLICATION

Below are examples of the types of shapes and patterns that can be made and linked as needed to fit nearly any application. The only limiting factor is max run (see spec table), which can be easily extended by connecting additional power supplies<sup>3</sup>. Additional power supplies can connect to any individual square LED segment anywhere in the run for maximum flexibility.

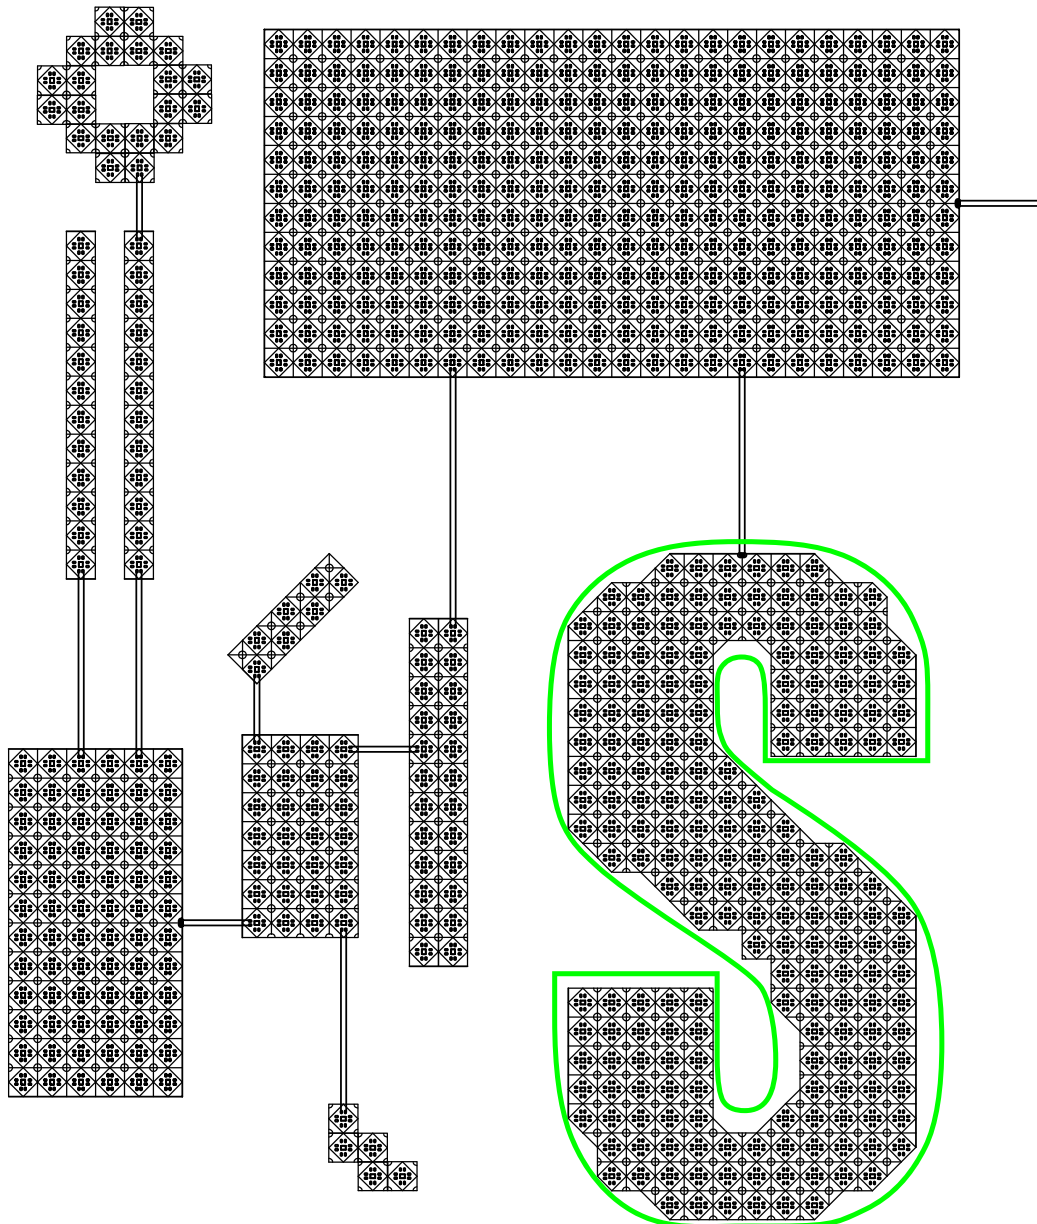

<sup>3</sup>Each power connection will need its own connected controller when multiple power supplies are connected to one run. Controllers that can synchronize their settings are required for this type of application.



Specifications are subject to change without notice.

T 866.811.5550

F 314.972.6202

email: [commercial-sales@superbrightleds.com](mailto:commercial-sales@superbrightleds.com)

[www.superbrightleds.com/cat/industrial-led-lighting/](http://www.superbrightleds.com/cat/industrial-led-lighting/)

